

Panasonic

LED

ADORN YOUR LIFE WITH
RIGHT LIGHT



LED LIGHTING

Japanese quality promise. Made In India.

15 DOWNLIGHTS

6 PANEL LIGHTS



Rimless Surface Tri CCT	7
Surface Radar	8
Rimless Surface	9
Matiz Colour Panel	10
PC Panel	11
Step Panel	12
Base Light	13
Base Light 1x1	14



Ferris Aluminium Swivel COB	16
Ferris Deep Recessed COB	17
Ferris Tilttable COB	18
Ferris Low Glare COB	19
Modular COB Linear Light	20
Surface Striker	21
Clip Type Deep Junction	22
Deep Junction 8W-15W	23
Tri CCT Deep Recessed COB	24
Tri CCT Modular Surface	25
Modular Surface 7W-30W	26
Honeycomb Tri CCT	27
Deep Recessed COB 7W-18W	28
Deep Downlight 6W-24W	29
Conceal Downlight Junction Box	30
Tri CCT & Tri Color Conceal	31
Swivel Downlight	32
Aluminium Swivel COB 30W/50W	33
Swivel COB Deep Junction BOX	34
Deep Junction COB	35
Junction Box Downlight	36



Cylindrical Suspended COB	37
Cylindrical Surface COB	38
Modular COB	39
Tri CCT Downlight	40
PDL Hybrid AnoraSlim Plus	41
PDL Hybrid AnoraSlim Tri-CCT	42
Downlight 5W-20W	43
Dual Colour Junction Box	44
Mini Surface 5W	45
Mini Surface 3W	46

47 SPOT LIGHTS



Surface Spot Light 3W, 6W	48
Surface Spot Light 10W-20W	49
Track Spot Light	50
Spot Light	51

52 OUTDOOR



Aluminium Flood Light	53
Aluminium Flood 150W-200W	54
Flood Light (20W-100W)	55
Aluminium Street Light	56
Aluminium Street Light 100W	57
Street Light	58
Aluminium Sensor Street Light	59
PC Sensor Street Light	60
Step Light	61
Bulk Head	62

63 WALL LIGHT



Up Down Light (K-Type) 3W, 6W	64
Up Down Light (K-Type) 6W, 12W	65
Dyna Up Down Wall Light 6W, 12W	66
Dyna Elevation Wall Light 4 Way	67
Dyna Elevation Wall Lights	68
Dyna Up Down Wall Light (2W-10W)	69
Dyna Wall Lights (Oblong, Round, Square)	70
Mirror Light	71

72 DECORATIVE



Rope Light - 60 LED/Mtr	73
Rope Light - 120 LED/Mtr	74
Tri Color RGB Rope Light	75
RGB Rope Light	76
RGB Strip Light	77
Strip Light 25W/36W/60W	78
Decofancy String Light	79
Strip LED Driver	80

81 BATTEN



THEALED Hyper Batten	82
THEALED Pro Batten	83
THEALED Ace Batten 24W	84
THEALED Ace Batten (1 Ft.)	85
THEALED AL Batten 40W	86
THEALED Batten 36W	87
THEALED Ace Batten 22W	88
THEALED Ace Batten 20W	89
THEALED Ace Rainbow 20W	90
THEALED Ace Batten 5W-10W	91
Altabright Anora Batten (2 Ft.)	92

93 BULBS



Dura Hyper LED Bulb 70W	94
Dura Hyper LED Bulb 30W-50W	95
Dura Max LED Bulb	96
Dura Saver LED Bulb 3W, 5W	97
Dura Saver LED Bulb 7W-12W	98
Emergency Bulb	99
Radar Bulb	100
Duro Nova Rainbow Colour Bulb	101
RGB Auto Changing Colour Bulb	102
Dura Saver Candle Bulb - Lens	103
Dura Saver Candle Bulb	104

KEY FEATURES





FIXTURES

Panel Light

Downlight

Spot Light


Outdoor

Wall Light

Decorative

Batten


Bulb

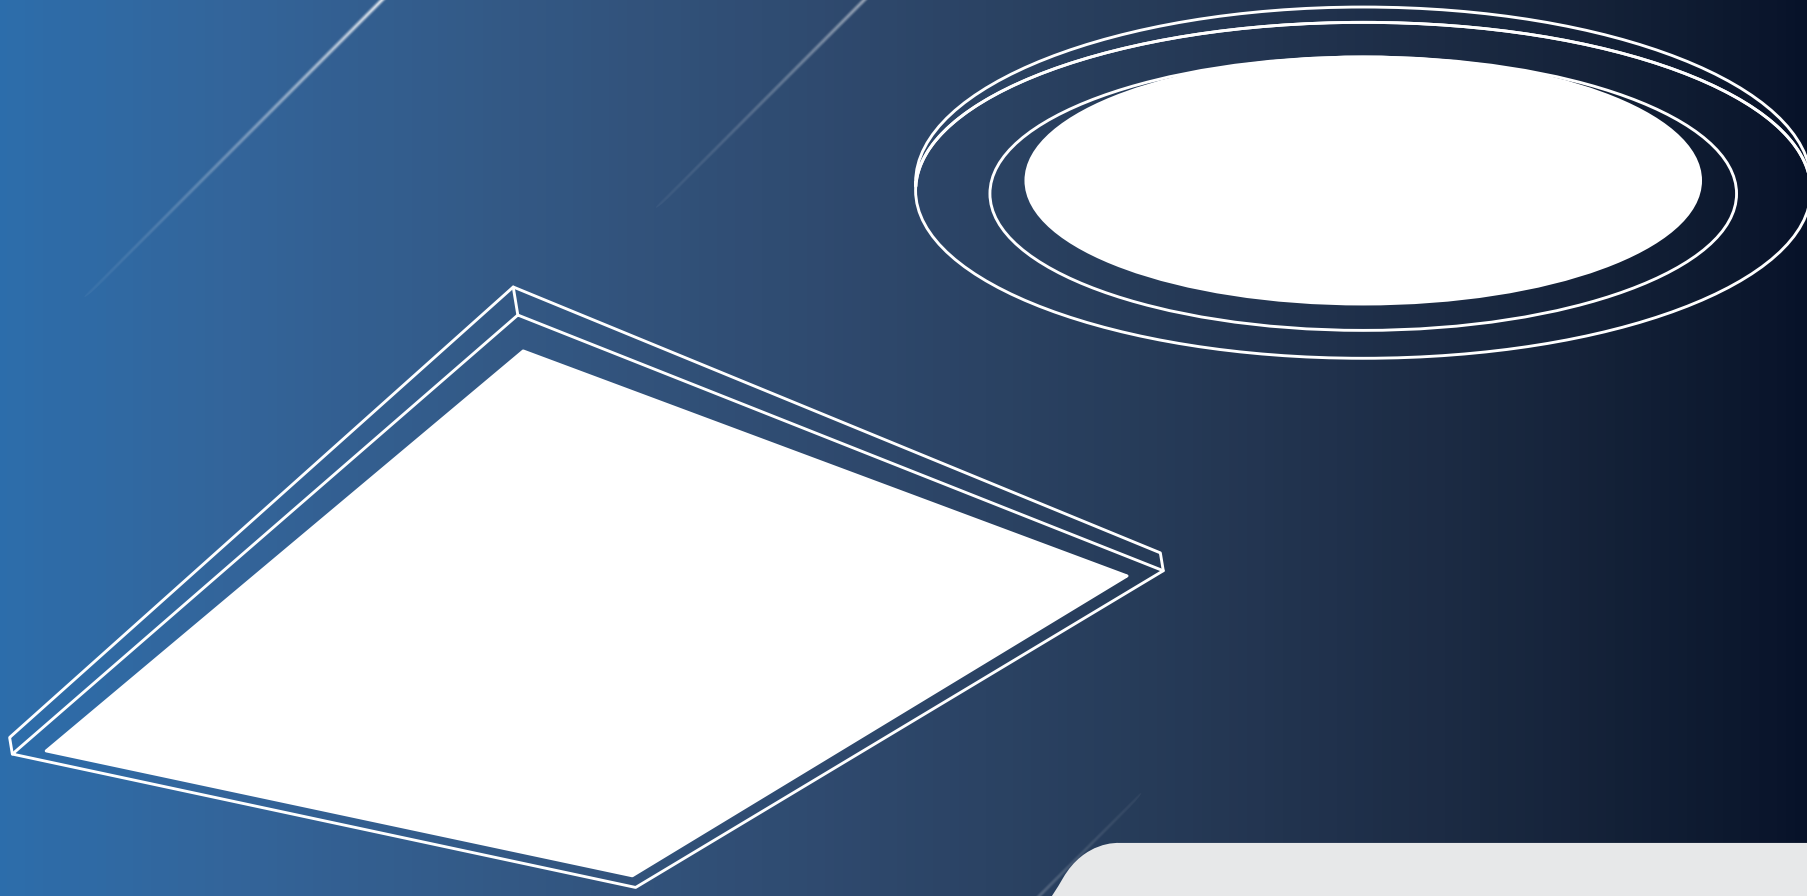

Panel Light

RIMLESS SURFACE TRI CCT PANEL LIGHT

6W, 12W, 18W, 24W

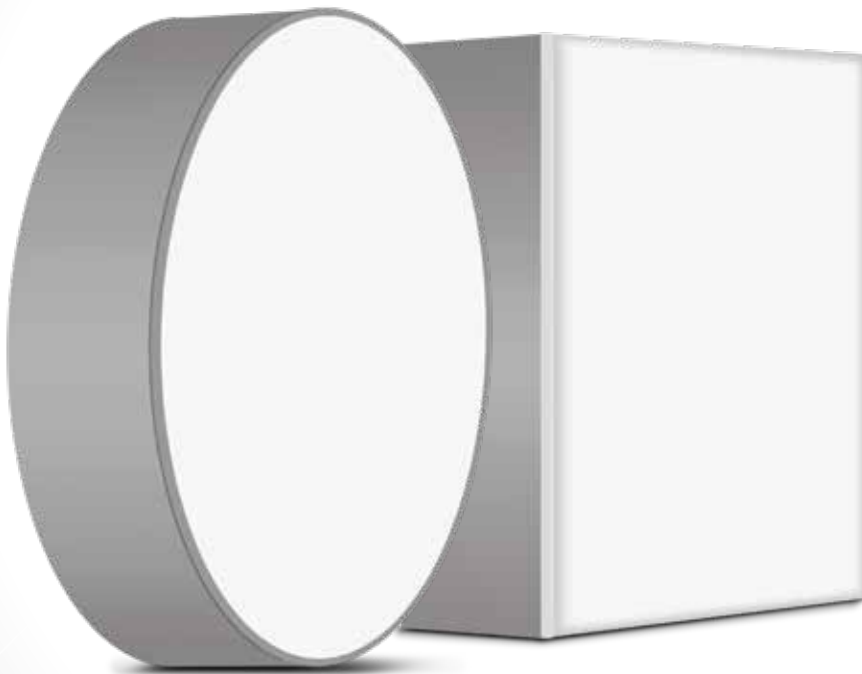

Efficacy
>100
lm/W



CCT
C+N+W

KEY FEATURES

CUSTOMER BENEFITS

Performance

Wide Voltage Range: 140-275V	Wide application, covering all the T2, T3 cities
Surge Protection: 4kV	Better performance even with bad power conditions / surges
High Voltage Protection 440V	Can withstand 440V for 120 mins
Life up to >25,000 Burning Hrs.	Long life
Tri CCT	Can be used single product in multiple colours
Photo-biologically Safe Light	Eye comfort
Surface Mounted	Wide range on application

Wattages	Cutout Dimensions (cm) Round / Square	Product Dimensions (cm) Round / Square
6W	NA	Ø10x3.1 / 10x10x3.1
12W	NA	Ø12.5x3.1 / 12.5x12.5x3.1
18W	NA	Ø15x3.1 / 15x15x3.1
24W	NA	Ø20x3.1 / 20x20x3.1




APPLICATIONS

- Residential
- Bedroom
- Living Rooms
- Office
- Kitchen
- Restaurants & Hotels

SURFACE RADAR PANEL LIGHT

9W

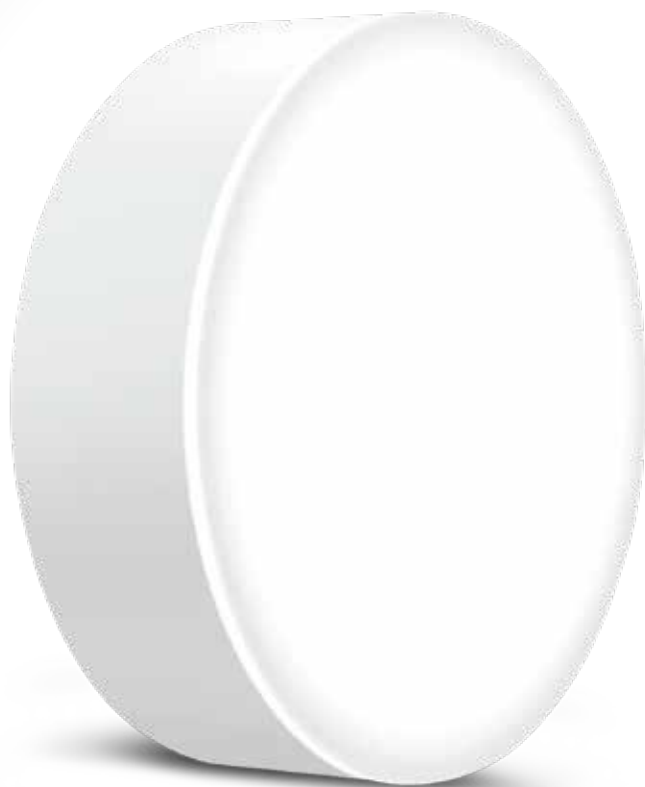

Panasonic



Efficacy
>80
lm/W



CCT
6500K

KEY FEATURES

CUSTOMER BENEFITS

Performance

Lumen Efficacy: >80lm/W	More light with less power consumption
Surge Protection: 4kV	No Impact on performance even with bad power conditions / Surges
High Voltage Protection 440V	Can withstand 440V for 120 mins
Life up to >25,000 Burning Hrs.	Long life
Better Lumen Maintenance	Better consistency in lux / lighting levels throughout life
Photo-biologically Safe Light	Eye comfort
Sensor Range: 3mtr Radius Lamp turn ON time after sensing object: 15-20sec	Wide sensing range better energy saving

Wattages	Cutout Dimensions (cm)	Product Dimensions (cm)
9W	NA	Ø10.3x3.5




APPLICATIONS

- Residential
- Doorway
- Stairway
- Corridors
- Indoor Spaces

RIMLESS SURFACE PANEL LIGHT

6W, 12W, 18W, 24W

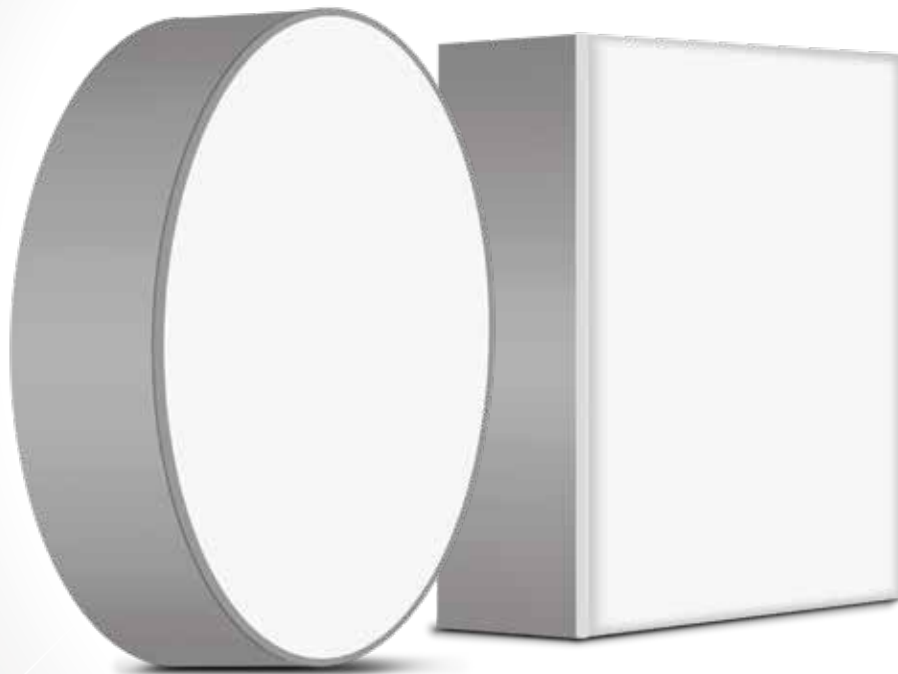

Panasonic



Efficacy
>100
lm/W



CCT
3000K
4000K
6500K

Also available in
TRI CCT

KEY FEATURES

CUSTOMER BENEFITS

Performance

Wide Voltage Range 140-275V	Wide application, covering all the T2, T3 cities
Surge Protection: 4kV	Better performance even with bad power conditions / surges
High Voltage Protection 440V	Can withstand 440V for 120 mins
Lumen: 100lm/W	More light with less power consumption
Life up to >25,000 Burning Hrs.	Long life
Rimless Diffuser	More light spread and output

Wattages	Cutout Dimensions (cm) Round / Square	Product Dimensions (cm) Round / Square
6W	NA	Ø10x3.1 / 10x10x3.1
12W	NA	Ø12.5x3.1 / 12.5x12.5x3.1
18W	NA	Ø15x3.1 / 15x15x3.1
24W	NA	Ø20x3.1 / 20x20x3.1




APPLICATIONS

- Residential
- Bedroom
- Halls
- Shops

MATIZ

COLOUR PANEL

6W - Multicolour in 1 Light

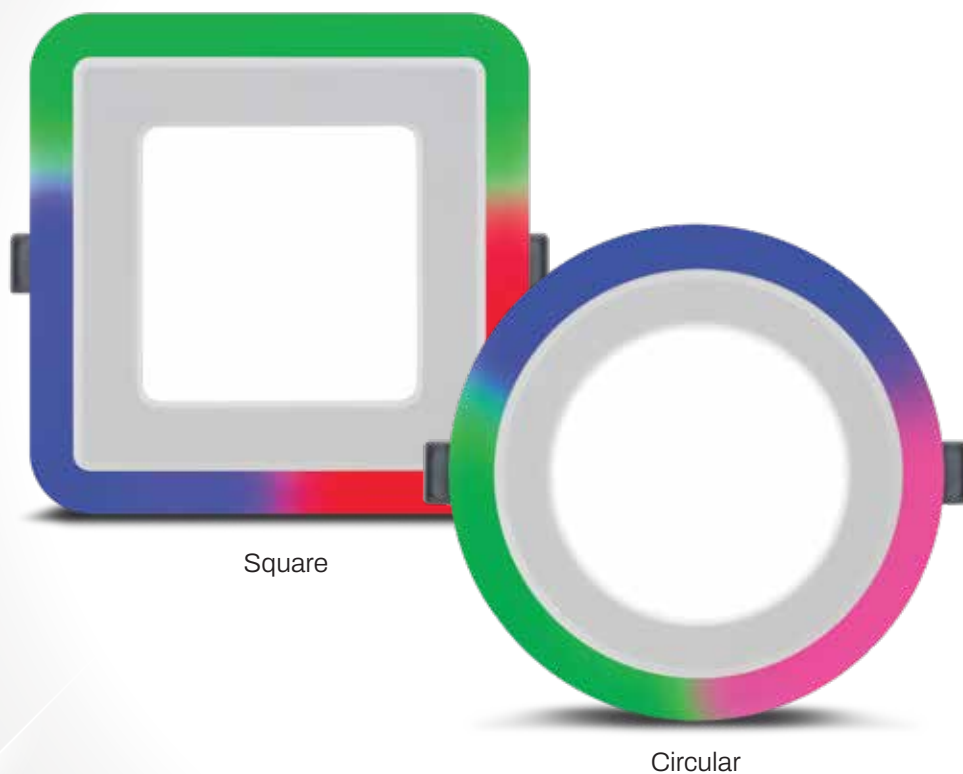

Square

Circular

Panasonic



Efficacy
>70
lm/W



CCT
CW + RGB & CW + PBG Colour
Dual Colour with CW+R, CW+G,
CW+B, CW+P

KEY FEATURES

CUSTOMER BENEFITS

Performance

Wide Voltage Range: 140-275V	Wide application, covering all the T2, T3 cites
Surge Protection: ≥4V	Better performance even with bad power conditions / surges
High Voltage Protection 440V	Can withstand 440V for 120 mins
Life up to >25,000 Burning Hrs.	Long life
Better Light Distribution with Help of PMMA LGP	Better consistency in lux / lighting levels throughout life
Photo-biologically Safe Light	Eye comfort
Fit for False Ceilings	Can be used hotels, offices & indoor

Wattages	Cutout Dimensions (cm) Round / Square	Product Dimensions (cm) Round / Square
6W	Ø10.4 / 10.4x10.4	Ø14.7x3.4 / 14.7x14.7x3.4



APPLICATIONS

- False ceilings
- Bedrooms
- Living rooms
- Office
- Kitchen
- Restaurants & hotels
- Corridors

PANEL LIGHT

3W, 6W, 10W, 15W, 20W



Square

Circular



Efficacy
>70
lm/W

(* For Higher Wattages)



CCT
3000K
4000K
6500K

KEY FEATURES

CUSTOMER BENEFITS

Performance

Sleek Aluminum Housing
with Step Design

Wide Voltage Range: 140-275V

Surge Protection: ≥4kV

Inbuilt Driver

Edge Lit Type Led Arrangement

Life up to >25,000 Burning Hrs.

Fit for low depth ceiling with good aesthetic

Wide application, covering all the T2, T3 cities

No impact on performance even with
bad power conditions / surges

Prevent component failure with
additional safety during high voltages

Uniform and glare free light output

Long life

Wattages	Cutout Dimensions (cm) Round / Square	Product Dimensions (cm) Round / Square
3W	Ø6.8 / 6.8x6.8	Ø8.6x3 / 8.6x8.6x3
5W	Ø9.7 / 9.7x9.7	Ø12x3 / 12x12x3
10W	Ø12.9 / 12.9x12.9	Ø14.4x3 / 14.4x14.4x3
15W	Ø14.5 / 14.5x14.5	Ø17x2.5 / 17x17x3
20W	Ø19.5 / 19.5x19.5	Ø22 x 3 / 22x22x3



APPLICATIONS

- Residential
- Small Offices
- Service Areas
- Retail Shops

STEP PANEL

3W, 5W, 10W, 15W, 20W, 24W



Circular



Square

Panasonic



Efficacy
>70
lm/W

(* For Higher Wattages)



CCT
3000K
4000K
6500K

KEY FEATURES

CUSTOMER BENEFITS

Performance

Sleek Aluminum Housing with Step Design	Fit for low depth ceiling with good aesthetic
Wide Voltage Range: 140-275V	Wide application, covering all the T2, T3 cities
Surge Protection: $\geq 2.5\text{kV}$	No impact on performance even with bad power conditions / surges
Non-isolated Driver	Prevent component failure with additional safety during high voltages
Edge Lit Type Led Arrangement	Uniform and glare free light output
Life up to >25,000 Burning Hrs.	Long life


Wattages	Cutout Dimensions (cm) Round / Square	Product Dimensions (cm) Round / Square
3W	$\varnothing 7.5$ / 7.5x7.5	$\varnothing 8.5 \times 2.5$ / 8.5x8.5x2.5
5W	$\varnothing 10.8$ / 10.8x10.8	$\varnothing 12 \times 2.5$ / 12x12x2.5
10W	$\varnothing 13.2$ / 13.2x13.2	$\varnothing 14.5 \times 2.5$ / 14.5x14.5x2.5
15W	$\varnothing 15.6$ / 15.6x15.6	$\varnothing 17 \times 2.5$ / 17x17x2.5
20W	$\varnothing 17.7$ / 17.7x17.7	$\varnothing 19 \times 2.5$ / 19x19x2.5
24W	$\varnothing 20.5$ / 20.4x20.4	$\varnothing 22 \times 2.5$ / 22x22x2.5



APPLICATIONS

- Residential
- Small Offices
- Service Areas
- Retail Shops

BASE LIGHT 36W, 40W

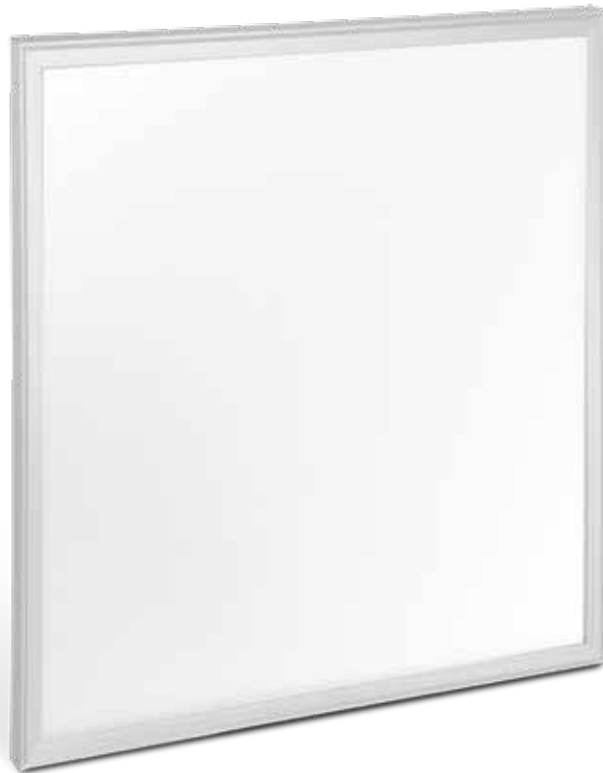

Panasonic



Efficacy
100
lm/W



CCT
3000K
4000K
6500K

KEY FEATURES

CUSTOMER BENEFITS

Performance

Low Depth Base Light	Easy to fit on low depth ceiling
Wide Voltage Range: 140-270VAC	Wide application, covering all the T2, T3 cites
Surge Protection: 4kV	No impact on performance even with bad power conditions / surges
Life up to >25,000 Burning Hrs.	Long life
Isolated Driver	No impact on component during power fluctuation

Wattages	Cutout Dimensions (cm)	Product Dimensions (cm)
36W	NA	59.5x59.5x3
40W	NA	59.5x59.5x3



APPLICATIONS

- Office
- Schools
- Hospitals
- Conference Hall
- Banks
- BPO
- Suitable for frame ceilings (Armstrong/Gypsum)

BASE LIGHT

1x1, 24W



Panasonic



Efficacy
90
lm/W



CCT
6500K

KEY FEATURES

CUSTOMER BENEFITS

Performance


Lumen Efficacy: 90lm/W	More light with less power consumption
Surge Protection: 4kV	No impact on performance even with bad power conditions / surges
High Voltage Protection: 440V	Can withstand 440V for 2 hours
Wide Voltage Range: 140-270V	Wide application, covering all the T2, T3 cities
Life up to >25,000 Burning Hrs.	Long life
Better Lumen Maintenance	Better consistency in lux / lighting levels throughout life
Photo-biologically Safe Light	Eye comfort

Wattages	Cutout Dimensions (cm)	Product Dimensions (cm)
24W	28x28	29.5x29.5x3



APPLICATIONS

- Offices
- Office Utility Area
- Shops
- Retail Showrooms
- Other Indoor Spaces

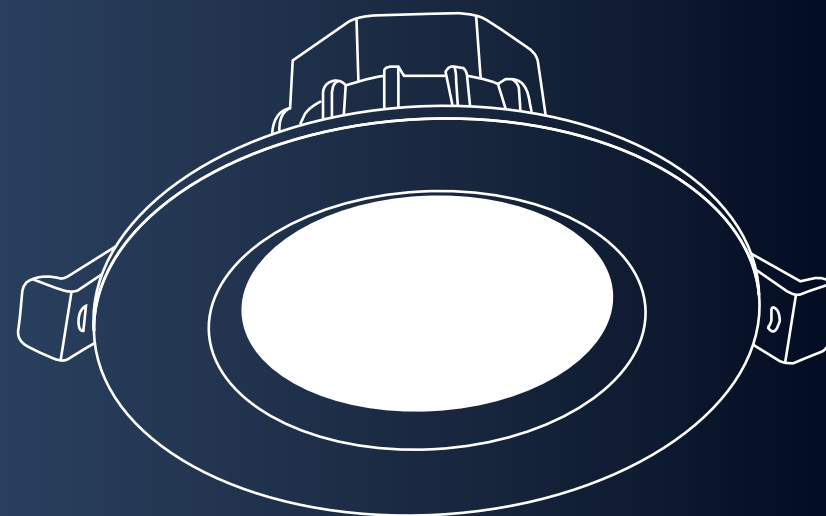

Downlight

FERRIS

ALUMINUM SWIVEL COB LED DOWNLIGHT

3W | 7W | 12W | 15W | 18W | 24W



Panasonic



Efficacy
≥90
lm/W



CCT
3000K
4000K
6500K

KEY FEATURES

CUSTOMER BENEFITS

Performance

Tilttable Diffuser	Adjust light output direction as per requirement
COB LED with High Performance Reflector	Focused beam angle for spot light usage
Wide Voltage Range: 140-275V	Wide application, covering all the T2, T3 cities
Surge Protection: >4kV	No impact on performance even with bad power conditions / surges
High Voltage Protection: 440V	Can withstand 440V for 2 hours
Life up to >25,000 Burning Hrs.	Long life product
Elegant Aluminium Housing	Better aesthetic & heat management for longer life
Isolated Driver	No impact of power fluctuation

Wattages	Cutout Dimensions (cm)	Product Dimensions (cm)
3W	Ø 5.5	Ø 6.3 x 4.3
7W	Ø 7.0	Ø 8.7 x 5.6
12W	Ø 8.5	Ø 10.0 x 7.1
15W	Ø 8.5	Ø 10.0 x 7.1
18W	Ø 9.5	Ø 11.5 x 7.2
24W	Ø 12.5	Ø 13.5 x 5.5



APPLICATIONS

- Modern Homes
- Hospitality
- Hotels
- Showrooms
- Shopping Malls
- Museums
- Business Outlets
- Retail

FERRIS

DEEP RECESS COB LED DOWNLIGHT

7W | 12W | 18W



Panasonic



Efficacy
>75
lm/W



CCT
3000K
4000K

KEY FEATURES

CUSTOMER BENEFITS

Performance

Lumen Efficacy: >75 Lm/W(*NW)	Energy saving
Low Glare	Comfortable to eye
Life up to >25,000 Burning Hrs	Better reliability
Wide Voltage Range: 140-275V	Wide application, covering all the T2, T3 cities
Isolated Driver	Better safety compared to non-isolated driver
Surge Protection >3kV	Better performance even with bad power conditions / surges

Wattages	Cutout Dimensions (cm)	Product Dimensions (cm)
7W	Ø6.2	Ø7x5
12W	Ø7.6	Ø8.5x6.5
18W	Ø8.7	Ø10x8



APPLICATIONS

- Modern Homes
- Hospitality
- Hotels
- Showrooms
- Shopping Malls
- Museums
- Business Outlets
- Retail

FERRIS

TILTABLE COB LEDDOWNLIGHT

12W | 18W

Panasonic



Efficacy
>70
lm/W



CCT
3000K
4000K
6500K

KEY FEATURES

CUSTOMER BENEFITS

Performance

Lumen Efficacy > 80 Lm/W	Energy saving
Multi Adjustable Design	Vertically: 90°, Horizontally (sideways): 330°
Surge Protection >4kV	Better performance even with bad power conditions / surges
High Voltage Protection: 440V	Can withstand 440V for 2 hours
Life up to >25,000 Burning Hrs	Better reliability
Wide Voltage Range: 140-275V	Wide application, covering all the T2, T3 cites
Isolated Driver	Better safety compared to non-isolated driver
Aerodynamic Design for Better Thermal Management	Better consistency in lux levels and reliability at extreme temperature condition

Wattages	Cutout Dimensions (cm)	Product Dimensions (cm)
12W	NA	Ø 7.8 x 10.8
18W	NA	Ø 8.8 x 11.6



APPLICATIONS

- Modern Homes
- Hospitality
- Hotels
- Showrooms
- Shopping Malls
- Museums
- Business Outlets
- Retail

FERRIS LOW GLARE COB DOWNLIGHT

7W | 12W | 18W



Panasonic



Efficacy
>55
lm/W



CCT
3000K
4000K

KEY FEATURES

CUSTOMER BENEFITS

Performance

Lumen Efficacy: > 55 Lm/W(*NW)	Energy saving
Low Glare	Comfortable to eye
Life up to >25,000 Burning Hrs	Better reliability
Wide Voltage Range: 140-275V	Wide application, covering all the T2, T3 cites
Isolated Driver	Better safety compared to non-isolated driver
Surge Protection: >3kV	Better performance even with bad power conditions / surges
Aerodynamic Design for Better Thermal Management	Better consistency in lux levels and reliability at extreme temperature conditionurges

Wattages	Cutout Dimensions (cm)	Product Dimensions (cm)
7W	Ø 7.3	Ø 8.4 x 4.5
12W	Ø 9.1	Ø 10.3 x 4.9
18W	Ø 11.6	Ø 12.8 x 5.9



APPLICATIONS

- Modern Homes
- Hospitality
- Hotels
- Showrooms
- Shopping Malls
- Museums
- Business Outlets
- Retail

MODULAR COB LINEAR LIGHT

10W, 20W

Panasonic



Efficacy
>70
lm/W



CCT
3000K
4000K
6500K

KEY FEATURES

CUSTOMER BENEFITS

Performance

Lumen Efficacy >70 Lm/W	Energy saving
Narrow Beam Angle	24°, Can be used as spot light
Surge Protection: >3kV	Better performance even with bad power conditions / surges
Life up to >25,000 Burning Hrs	Better reliability
Wide Voltage Range: 140-275V	Wide application, covering all the T2, T3 cites
Isolated Driver	Better safety compared to non-isolated driver
Power Factor: ≥0.90	Better Energy saving

Wattages	Cutout Dimensions (cm)	Product Dimensions (cm)
10W	145x36	160x45x44
20W	277x36	290x45x44



APPLICATIONS

- Modern Homes
- Hospitality
- Hotels
- Showrooms
- Shopping Malls
- Museums
- Business Outlets
- Retail

Downlight

Spot Light


Outdoor

Wall Light

Decorative

Batten

Bulb

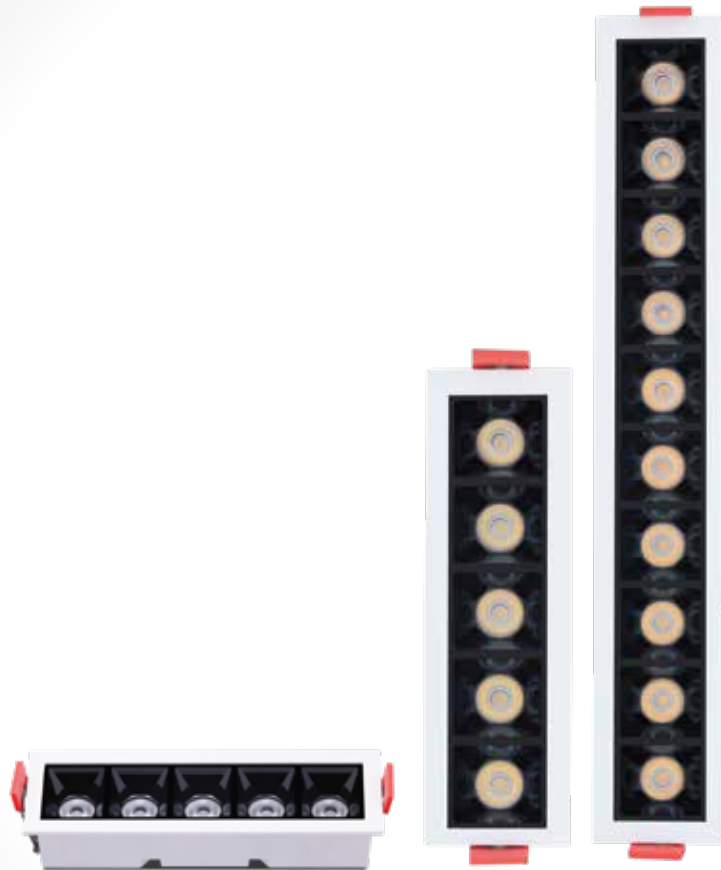

LED SURFACE STRIKER DOWNLIGHT

3W



Panasonic



Efficacy
>60
lm/W



CCT
3000K
4000K
6500K

KEY FEATURES

CUSTOMER BENEFITS

Performance

Lumen Efficacy: 60lm/W
Lumen: 180lm (6500K)

More light with less power consumption

Surge Protection: 3kV

No impact on performance even with bad power conditions / surges

High Voltage Protection 440V

Can withstand 440V for 120 mins

Wide Voltage Range: 180-270V

Wide application, covering all the T2, T3 cites

Life up to >25,000 Burning Hrs.

Better consistency in lux / lighting levels through out life

Photo-biologically Safe Light

Eye comfort

IP65 Protection

Protection against dust and water splashes

Wattages	Cutout Dimensions (cm)	Product Dimensions (cm)
3W	NA	Ø6x1.5



APPLICATIONS

- Wardrobes
- Kitchen Cabinets
- Display Units,
- Storage Spaces

DEEP JUNCTION CLIP TYPE

3W



Panasonic



Efficacy
60
lm/W



CCT
3000K, 4000K, 6500K,
Red, Green, Blue, Pink

KEY FEATURES

CUSTOMER BENEFITS

Performance

Wide Voltage Range: 180-270V

Wide application, covering all the T2, T3 cities

Surge protection: 2.5kV

Better performance even with bad power conditions / surges

Life up to >25,000 Burning Hrs.

Long life

Photo-biologically Safe Light

Eye comfort

Recessed Type

Wide range on application

Wattages

Cutout Dimensions (cm)

Product Dimensions (cm)

3W

Ø5

Ø7.5x2.5



APPLICATIONS


- Residential
- Hotels & Restaurants
- Retail Shop
- Service Area

DEEP JUNCTION DOWNLIGHT

8W, 12W, 15W



AVAILABLE IN SIX COLOURS



Panasonic



Efficacy
100
lm/W



CCT
3000K
4000K
6500K

KEY FEATURES

CUSTOMER BENEFITS

Performance

DOB Technology	Slim design, compact size, higher reliability
Uniform Light Diffusion	Comfortable illumination
Multiple Colour Options	Perfect for decorative & ambient lighting
Wide Voltage Range: 180-270V	Stable performance even in fluctuation supply
Inherent DOB Surge Protection	Better performance even with bad power conditions / surges
Life up to >25,000 Burning Hrs.	Better reliability
Polycarbonate Housing	Lightweight & durable
Toolless Spring Clip Installation	Easy & quick mounting

Wattages	Cutout Dimensions (cm)	Product Dimensions (cm)
8W	Ø4.6	Ø8.35x6.4
12W	Ø4.6	Ø14x6.4
15W	Ø4.6	Ø14x6.4




APPLICATIONS

- Residential
- Hotels & Restaurants
- Retail Shop
- Service Area

TRI CCT DEEP RECESSED COB DOWNLIGHT

7W, 12W, 18W

Panasonic



Gun Black



White



Rose Gold



Efficacy
75
lm/W



CCT
C+N+W

KEY FEATURES

CUSTOMER BENEFITS

Performance

Recessed Type	Easy installation
Wide Voltage Range: 140-270V	Wide application, covering all the T2, T3 cites
Surge Protection: 4kV	Better performance even with bad power conditions / surges
Life up to >25,000 Burning Hrs.	Better reliability
Aluminium Housing	Better aesthetic & heat management for longer life
Isolated Driver	Better heat dissipation

Wattages	Cutout Dimensions (cm)	Product Dimensions (cm)
7W	Ø5.6	Ø6.5x5.4
12W	Ø7	Ø8x7.5
18W	Ø8.5	Ø9.3x9.5




APPLICATIONS

- Residential
- Small Office
- Retail Shop
- Service Area
- Hospitality

TRI CCT MODULAR SURFACE

9W, 15W



Efficacy
100
lm/W



CCT
C+N+W

KEY FEATURES

CUSTOMER BENEFITS

Performance

Lumen Efficacy: 100 Lm/W (*CW)	Energy saving
Uniform Light Diffusion	Comfortable illumination
Multiple CCT Options	Perfect for decorative & ambient lighting
Wide Voltage Range: (180-270V)	Stable performance even in fluctuation supply
Surge Protection: 4 kV	No impact on performance even with bad power conditions / surges
25,000+ Hours Life	Lower maintenance
Modular Design	Quick installation and easy maintenance
Polycarbonate Housing	Lightweight & durable

Wattages	Cutout Dimensions (cm)	Product Dimensions (cm)
9W	NA	Φ11x4.8
15W	NA	Ø13.5x4.8



APPLICATIONS

- Residential
- Commercial & Office Spaces
- Retail & Hospitality
- Educational Institutions
- Healthcare Facilities
- Institutional & Public Buildings
- Industrial & Utility Areas (Light Duty)

MODULAR SURFACE

7W, 9W, 15W, 20W, 30W



Panasonic



Efficacy
100
lm/W



CCT
3000K
4000K
6500K

KEY FEATURES

CUSTOMER BENEFITS

Performance

Lumen Efficacy: 100 Lm/W(*CW)	Energy saving
Uniform Light Diffusion	Comfortable illumination
Multiple CCT Options	Perfect for decorative & ambient lighting
Wide Voltage Range: 140-270V, 180-270V (30W)	Stable performance even in fluctuation supply
Surge Protection: 4 kV	No impact on performance even with bad power conditions / surges
Life up to >25,000 Burning Hrs.	Long life product
Twist and Fit Type Assembly	Easy fitment to holder
Rimless Diffuser	Full glow diffuser for better light spread

Wattages	Cutout Dimensions (cm)	Product Dimensions (cm)
7W	NA	Ø8.5x4.8
9W	NA	Ø11x4.8
15W	NA	Ø13.5x4.8
20W	NA	Ø18.4x4.6
30W	NA	Ø18.4x4.6



APPLICATIONS

- Residential
- Commercial & Office Spaces
- Retail & Hospitality
- Educational Institutions
- Healthcare Facilities
- Institutional & Public Buildings
- Industrial & Utility Areas (Light Duty)

HONEYCOMB TRI CCT DOWNLIGHT

8W, 12W, 18W



Silver



Rose Gold



CCT

Switch 1: 6500K

Switch 2: 3000K

Switch 3: 6500K + 3000K

KEY FEATURES

CUSTOMER BENEFITS

Performance

Surge Protection: 4kV

No Impact on performance even with bad power conditions / surges

High Voltage Protection 440V

Can withstand 440V for 120 mins

Wide Voltage Range: 160-270V

Wide application, covering all the T2, T3 cites

Life up to >25,000 Burning Hrs.

Better reliability

Better Lumen Maintenance

Better consistency in lux / lighting levels through out life

Photo-biologically Safe Light

Eye comfort

Wattages

Cutout Dimensions (cm)

Product Dimensions (cm)

8W	Ø9.3	Ø12.5x4.5
12W	Ø15.3	Ø16.5x4.5
18W	Ø20.3	Ø21.5x4.5



APPLICATIONS

- Residential
- Small Office
- Retail Shop
- Hospitality

DEEP RECESSED COB DOWNLIGHT

7W, 12W, 18W



White

Rose Gold



Yellow Gold

Gun Black

Panasonic



Efficacy
>80
lm/W



CCT
3000K
4000K
6500K

KEY FEATURES

CUSTOMER BENEFITS

Performance

Lumen Efficacy: 80 lm/W (6500K)	Energy saving
Recessed Type	Easy installation
Wide Voltage Range: 140-275V	Wide application, covering all the T2, T3 cites
Surge Protection: >4kV	Better performance even with bad power conditions / surges
Life up to >25,000 Burning Hrs.	Better reliability
Aluminium Housing	Better aesthetic & heat management for longer life
Isolated Driver	Better heat dissipation

Wattages	Cutout Dimensions (cm)	Product Dimensions (cm)
7W	Ø5.6	Ø6.5x5.4
12W	Ø7	Ø8x7.5
18W	Ø8.5	Ø9.3x9.5



APPLICATIONS

- Residential
- Small Office
- Retail Shop
- Service Area
- Hospitality

DEEP DOWNLIGHT

6W, 12W, 18W, 24W



Panasonic



Efficacy
>80
lm/W



CCT
3000K
4000K
6500K

KEY FEATURES

CUSTOMER BENEFITS

Performance

Lumen Efficacy : >80lm/W (6W, 12W) >90lm/W (18W, 24W)	More light with less power consumption
Wide Voltage Range: 180-270V	Wide application, covering all the T2, T3 cities
Life up to >25,000 Burning Hrs.	Long life
High Voltage Protection 440V	Can withstand 440V for 30 mins
Surge Protection: 4kV	Better performance even with bad power conditions / surges
Better Lumen Maintenance	Better consistency in lux / lighting levels through out life
Photo-biologically Safe Light	Eye comfort

Wattages	Cutout Dimensions (cm)	Product Dimensions (cm)
6W	Ø10.5	Ø12.5x5
12W	Ø10.5	Ø12.5x5
18W	Ø12.5	Ø15x5
24W	Ø15.5	Ø17.5x5

APPLICATIONS

- Offices
- Corridors & Shops
- Residential Buildings



CONCEAL DOWNLIGHT JUNCTION BOX

6W, 8W, 10W



AVAILABLE IN 7 COLOURS



Panasonic



Efficacy
70
lm/W



CCT
3000K
4000K
6500K

KEY FEATURES

CUSTOMER BENEFITS

Performance

Lumen Efficacy: 70 Lm/W(*CW)	Energy saving
Uniform Light Diffusion	Comfortable illumination
Multiple CCT & Colours Options	Perfect for decorative & ambient lighting
25,000+ Hours Life	Lower maintenance
Wide Voltage Range: 180-270V	Stable performance even in fluctuation supply
Surge Protection: $\geq 2.5\text{kV}$	Better performance even with bad power conditions / surges
Toolless Spring Clip Installation	Easy and quick mounting
Polycarbonate Housing	Lightweight & durable

Wattages	Cutout Dimensions (cm)	Product Dimensions (cm)
6W	Ø7.5	Ø10.9x2.5
8W	Ø7.5	Ø10.9x2.5
10W	Ø7.5	Ø10.9x2.5





APPLICATIONS

- Residential
- Hotels & Restaurants
- Retail Shop
- Service Area

TRI CCT & TRI COLOUR CONCEAL DOWNLIGHT

12W



Efficacy
80
lm/W



CCT
C+N_W
R+B+V

KEY FEATURES

CUSTOMER BENEFITS

Performance

Wide Voltage Range: 140-275V

Wide application, covering all the T2, T3 cites

Surge Protection: 4kV

Better performance even with bad power conditions / surges

Life up to >25,000 Burning Hrs.

Long life

Photo-biologically Safe Light

Eye comfort

Recessed Type

Wide range on application

Wattages

Cutout Dimensions (cm)

Product Dimensions (cm)

12W

Ø7.5

Ø10.9x2.5



APPLICATIONS

- Residential
- Hotels & Restaurants
- Retail Shop
- Service Area

SWIVEL DOWNLIGHT 3W, 6W, 9W, 12W



Efficacy
>70
lm/W



CCT
3000K
4000K
6500K

KEY FEATURES

CUSTOMER BENEFITS

Performance

Wide Voltage Range: 140-270V	Wide application, covering all the T2, T3 cites
Prismatic Diffuser	Prevent glare/direct light on eyes
Surge Protection: 2.5kV	No impact on performance even with bad power conditions / surges
Life up to >25,000 Burning Hrs.	Long life product
Swivel Type Design	Tilttable angle for light output

Wattages	Cutout Dimensions (cm)	Product Dimensions (cm)
3W	Ø5.7	Ø7.4x4.5
6W	Ø7.25	Ø9.5x4.3
9W	Ø9.1	Ø11.6x5.6
12W	Ø11.7	Ø13.9x5.7



APPLICATIONS

- Ceiling
- Living Room
- Shops

ALUMINIUM SWIVEL COB DOWNLIGHT

30W, 50W



Panasonic



Efficacy
>80
lm/W



CCT
3000K
4000K
6500K

KEY FEATURES

CUSTOMER BENEFITS

Performance

Tilttable Diffuser	Adjust light output direction as per requirement
Lumen Efficacy: >80 lm/W(*CW)	Energy saving
Uniform Light Diffusion	Comfortable illumination
Multiple Colour Options	Perfect for decorative & ambient lighting
Wide Voltage Range: 140-275V	Stable performance even in fluctuation supply
Surge Protection: ≥4kV	Better performance even with bad power conditions / surges
High Voltage Protection: 440V	Can withstand 440V for 2 hours
Life up to >25,000 Burning Hrs.	Long life product

Wattages	Cutout Dimensions (cm)	Product Dimensions (cm)
30W	Ø14	Ø16x10.5
50W	Ø14	Ø16x12



APPLICATIONS

- Home
- Restaurant
- Shops
- Super Market

SWIVEL COB DEEP JUCTION BOX DOWNLIGHT

3W

Panasonic



Efficacy
>80
lm/W



CCT
3000K, 4000K, 6500K
Red, Green, Blue, Pink

KEY FEATURES

CUSTOMER BENEFITS

Performance

Wide Voltage Range: 140-275V	Wide application, covering all the T2, T3 cites
Surge Protection: > 3kV	No impact on performance even with bad power conditions / surges
Life up to >25,000 Burning Hrs.	Long life
Better Lumen maintenance	Better consistency in lux / lighting levels throughout life
Photo-biologically Safe Light	Eye comfort
Fit for Junction Box	Can be used as fitting in junction box

Wattages	Cutout Dimensions (cm)	Product Dimensions (cm)
30W	Ø14	Ø16x10.5
50W	Ø14	Ø16x12



APPLICATIONS

- Home
- Restaurant
- Shops
- Super Market

DEEP JUNCTION COB DOWNLIGHT

3W



Panasonic



Efficacy
>90
lm/W



CCT
3000K, 4000K, 6500K
Red, Green, Blue, Pink

KEY FEATURES

CUSTOMER BENEFITS

Performance

Wide Voltage Range: 140-275V

Surge Protection: > 3kV

Life up to >25,000 Burning Hrs.

Better Lumen maintenance

Photo-biologically Safe Light

Fit for Junction Box

Wide application, covering all the T2, T3 cities

No impact on performance even with bad power conditions / surges

Long life

Better consistency in lux / lighting levels throughout life

Eye comfort

Can be used as fitting in junction box

Wattages

Cutout Dimensions (cm)

Product Dimensions (cm)

3W

Ø10.5

Ø12.5x5



APPLICATIONS

- Home
- Restaurant
- Shops
- Super Market

JUNCTION BOX DOWNLIGHT

5W, 10W, 15W



Panasonic



Efficacy
80
lm/W



CCT
3000K
6500K

KEY FEATURES

CUSTOMER BENEFITS

Performance

Wide Voltage Range: 180-270V	Wide application, covering all the T2, T3 cities
PC Diffuser	Prevent glare/direct light on eyes
Surge Protection: 3kV	No impact on performance even with bad power conditions / surges
High Voltage Protection	Can withstand 380V for 2 hrs.
Life up to >30,000 Burning Hrs.	Long life
Photo-biologically Safe Light	Eye comfort

Wattages	Cutout Dimensions (cm)	Product Dimensions (cm)
5W	Ø7.65	Ø9.5x2.7
10W	Ø10.5	Ø12.9x2.7
15W	Ø13.25	Ø15.8x2.7



APPLICATIONS

- Home
- Restaurant
- Shops
- Super Market

CYLINDRICAL SUSPENDED COB DOWNLIGHT

12W, 18W | Silver & Rose Gold Reflector



Efficacy
>80
lm/W



CCT
3000K
4000K
6500K

KEY FEATURES

CUSTOMER BENEFITS

Performance

Wide Voltage Range: 140-275V

Surge Protection: 3kV

Life up to >25,000 Burning Hrs.

Rose Gold and Silver Reflector

Photo-biologically Safe Light

Fit for Surface

Wide application, covering all the T2, T3 cities

Better performance even with bad power conditions / surges

Long life

Wide range of product availability

Eye comfort

Can be used indoor application

Wattages	Cutout Dimensions (cm)	Product Dimensions (cm)
12W	NA	Ø7.3x9.5
18W	NA	Ø7.3x14.6



APPLICATIONS

- Bedrooms
- Living rooms
- Kitchen
- Restaurants
- Hotels

CYLINDRICAL SURFACE COB DOWNLIGHT

12W, 18W | Silver & Rose Gold Reflector



Efficacy
>80
lm/W



CCT
3000K
4000K
6500K

KEY FEATURES

CUSTOMER BENEFITS

Performance

Wide Voltage Range: 140-275V

Surge Protection: 3kV

Life up to >25,000 Burning Hrs.

Rose Gold and Silver Reflector

Photo-biologically Safe Light

Fit for Surface

Wide application, covering all the T2, T3 cities

Better performance even with bad power conditions / surges

Long life

Wide range of product availability

Eye comfort

Can be used indoor application

Wattages	Cutout Dimensions (cm)	Product Dimensions (cm)
12W	NA	Ø7.3x9.5
18W	NA	Ø7.3x14.6



APPLICATIONS

- Bedrooms
- Living rooms
- Kitchen
- Restaurants
- Hotels

MODULAR COB DOWNLIGHT

7W, 12W, 18W



Panasonic



Efficacy
>80
lm/W



CCT
3000K
4000K
6500K

KEY FEATURES

CUSTOMER BENEFITS

Performance

Wide Voltage Range: 140-275V

Surge Protection: $\geq 3\text{kV}$

Life up to >25,000 Burning Hrs.

Wide Reflector Range

Photo-biologically Safe Light

Recessed Type

Isolated Driver

Wide application, covering all the T2, T3 cities

Better performance even with bad power conditions / surges

Long life

Wide range of options

Eye comfort

Wide range on application

Better heat dissipation

Wattages	Cutout Dimensions (cm)	Product Dimensions (cm)
7W	Ø7.7	Ø6.5x4
12W	Ø7.7	Ø6.5x5
18W	Ø7.7	Ø6.5x7.5




APPLICATIONS

- False Ceilings
- Bedrooms
- Living Rooms
- Office
- Kitchen
- Restaurants & Hotels

TRI CCT DOWNLIGHT

5W, 10W, 15W, 20W

Panasonic

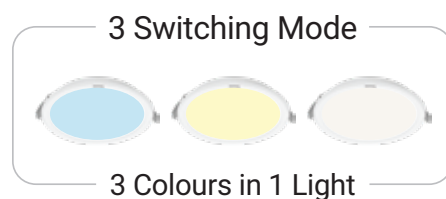

Efficacy
>100
lm/W



CCT
C+N+W

KEY FEATURES

CUSTOMER BENEFITS

Performance

Tri CCT PC Downlight	3 colour in single product through switching
Surge Protection: 2kV	Better performance even with bad power conditions / surges
Wide Voltage Range: 140-275V	Wide application, covering all the T2, T3 cites
Life up to >25,000 Burning Hrs.	Long life

Wattages	Cutout Dimensions (cm) Round / Square	Product Dimensions (cm) Round / Square
5W	Ø10 / 10x10	Ø11.6x3.6 / 11.6x11.6x3.6
10W	Ø10 / 10x10	Ø11.6x3.6 / 11.6x11.6x3.6
15W	Ø15 / 15x15	Ø16.6x3.6 / 16.6x16.6x3.6
20W	Ø20.5 / 20.5x20.5	Ø22x3.6 / 22x22x3.6




APPLICATIONS

- Residential
- Small Offices
- Service Areas
- Retail Shops

PDL HYBRID ANORASLIM PLUS

3W, 6W, 10W, 12W, 15W, 20W

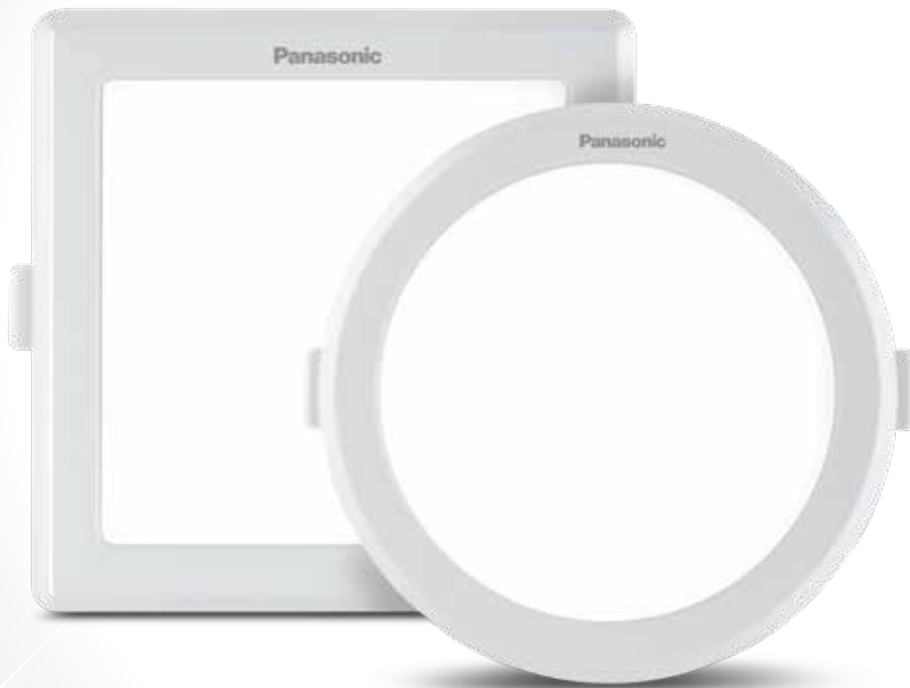

Panasonic



Efficacy

90 lm/W
(for 3W, 6W
& 10W)

100 lm/W
(for 12W, 15W
& 20W)



CCT

3000K
4000K
6500K

KEY FEATURES

CUSTOMER BENEFITS

Performance

Surge Protection: 3kV

No impact on performance even with bad power conditions / surges

High Voltage Protection 380V

Can withstand 380V for 30 Mins.

Wide Voltage Range: 180-270V

Wide application, covering all the T2, T3 cities

Life up to >25,000 Burning Hrs.

Long life product

Better Lumen Maintenance

Better consistency in lux/lighting levels through out life

Photo-biologically Safe Light

Eye comfort

Wattages	Cutout Dimensions (cm) Round / Square	Product Dimensions (cm) Round / Square
3W	Ø7.6 / 7.6x7.6	Ø9.9x2.8 / 9.8x9.8x2.8
6W	Ø10 / 10x10	Ø11.6x2.8 / 11.6x11.6x2.8
10W	Ø10 / 10x10	Ø11.6x2.8 / 11.6x11.6x2.8
12W	Ø14.5 / 14.5x14.5	Ø13x2.6 / 13x13x2.6
15W	Ø15 / 15x15	Ø16.5x2.8 / 16.5x16.5x2.8
15W	Ø15.2 / 15.2x15.2	Ø17.4x2.8 / 17.4x17.4x2.8
20W	Ø20.5 / 20.5x20.5	Ø22x2.8 / 22x22x2.8





APPLICATIONS

- Residential
- Small Offices
- Service Areas
- Retail Shops

PDL HYBRID TRI-CCT ANORASLIM

5W, 10W, 12W, 15W, 20W

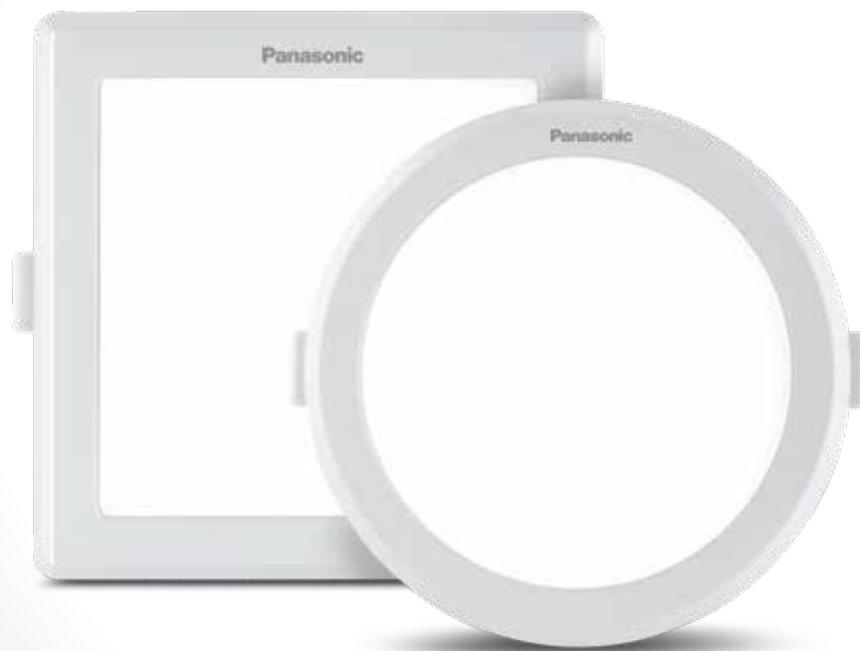

Efficacy
80
lm/W



CCT
C+N+W

KEY FEATURES

CUSTOMER BENEFITS

Performance

Lumen Efficacy: 80lm/W (6500K)	More light with less power consumption
Surge Protection: 4kV	No impact on performance even with bad power conditions / surges
High Voltage Protection 440V	Can withstand 440V for 2 hours
Wide Voltage Range: 140-270V	Wide application, covering all the T2, T3 cities
Life up to >25,000 Burning Hrs.	Long life product
Better Lumen Maintenance	Better consistency in lux/lighting levels through out life
Photo-biologically Safe Light	Eye comfort

Wattages	Cutout Dimensions (cm) Round / Square	Product Dimensions (cm) Round / Square
5W	Ø10 / 10x10	Ø11.6x2.7 / 11.6x11.6x2.7
10W	Ø10 / 10x10	Ø11.6x2.8 / 11.6x11.6x2.8
12W	Ø14.5 / 14.5x14.5	Ø13x2.6 / 13x13x2.6
15W	Ø15 / 15x15	Ø16.5x2.8 / 16.5x16.5x2.8
20W	Ø20.5 / 20.5x20.5	Ø22x2.8 / 22x22x2.8



APPLICATIONS

- Residential
- Small Offices
- Service Areas
- Retail Shops

DOWNLIGHT

5W, 10W, 15W, 20W



Panasonic



Efficacy
100
lm/W



CCT
3000K
4000K
6500K

KEY FEATURES

CUSTOMER BENEFITS

Performance

Lumen Efficacy: 100Lm/W*	More light with less power consumption
Surge Protection: 2.5kV	No impact on performance even with bad power conditions / surges
Wide Voltage Range: 140-270V	Wide application, covering all the T2, T3 cites
Life up to >25,000 Burning Hrs.	Long life product

* For 6500k cct only and higher wattages

* 100lm/W efficacy is achieved in 15W & 20W only

Wattages	Cutout Dimensions (cm) Round / Square	Product Dimensions (cm) Round / Square
5W	Ø10 / 10x10	Ø11.6x3.6 / 11.6x11.6x3.6
10W	Ø10 / 10x10	Ø11.6x3.6 / 11.6x11.6x3.6
15W	Ø15 / 15x15	Ø16.6x3.6 / 16.6x16.6x3.6
20W	Ø20.5 / 20.5x20.5	Ø22x3.6 / 22x22x3.6



APPLICATIONS

- Residential
- Small Offices
- Service Areas
- Retail Shops

DUAL COLOUR JUNCTION BOX

7W, 12W



7W



7W



12W

Panasonic



Efficacy
80
lm/W



CCT
6500K + 3000K
6500K + Blue

KEY FEATURES

CUSTOMER BENEFITS

Performance

Dual Mode Lighting-Inner and Outer Ring

Customer can change light colour as per requirement

Wide Voltage Range: 140-275V

Wide application, covering all the T2, T3 cities

Surge Protection: 2kV

No impact on performance even with bad power conditions / surges

Life up to >25,000 Burning Hrs.

Long life product

Fit for Junction Box

Can be used as fitting in junction box

Wattages	Cutout Dimensions (cm)	Product Dimensions (cm)
7W	Ø5	Ø8.4x4.6
12W	Ø7.6	Ø13.3x7




APPLICATIONS

- Bedroom
- Drawing Room
- Halls
- Shops

MINI SURFACE DOWNLIGHT

5W

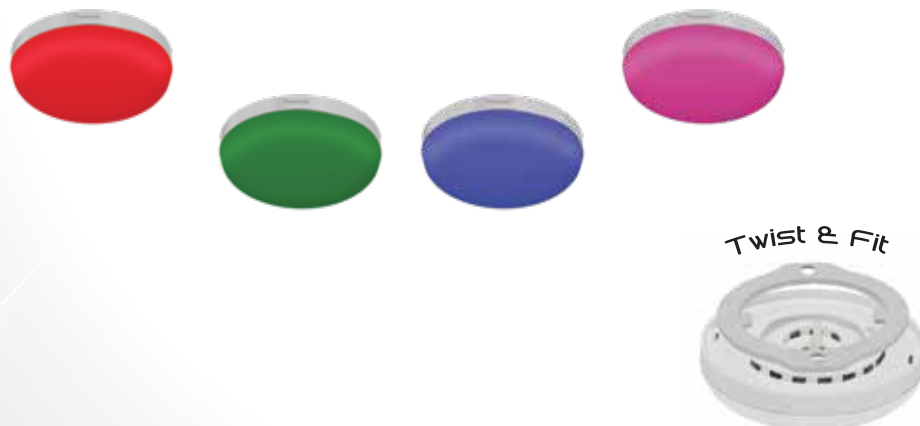

Panasonic



Efficacy
90
lm/W



CCT
3000K, 6500K
Red, Green, Blue, Pink

KEY FEATURES

CUSTOMER BENEFITS

Performance

Rimless Diffuser with Surface Fitting	Full glow diffuser for better light spread and compatible for surface fit
Wide Voltage Range: 180-270V	Wide application, covering all the T2, T3 cites
Surge Protection: 2kV	No impact on performance even with bad power conditions / surges
Life up to >15,000 Burning Hrs.	Long life product
Low Depth Surface: DL-16mm Depth	Slim design for better aesthetic

Wattages	Cutout Dimensions (cm)	Product Dimensions (cm)
5W	NA	Ø6.1x1.6



APPLICATIONS

- Cabinets
- Bedroom
- Halls
- Shops

MINI SURFACE DOWNLIGHT

3W


Panasonic



Efficacy
55
lm/W



CCT
3000K, 6500K
Red, Green, Blue, Pink

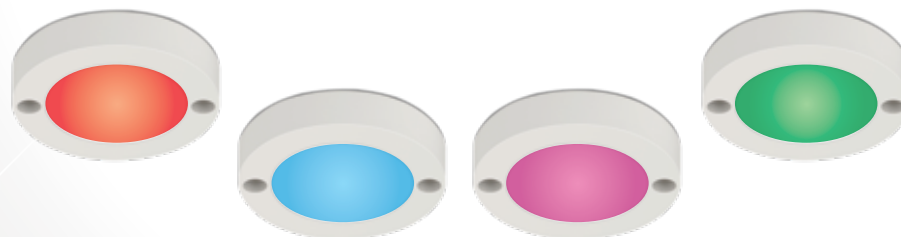

KEY FEATURES

CUSTOMER BENEFITS

Performance


Mini Surface with Compact Dia.	Suitable for small spaces and compact design
Wide Voltage Range 180-270V	Wide application, covering all the T2, T3 cities
Surge Protection: 2kV	No impact on performance even with bad power conditions / surges
Life up to >15,000 Burning Hrs.	Long life

Wattages	Cutout Dimensions (cm)	Product Dimensions (cm)
3W	NA	Ø6x1.65



APPLICATIONS

- Cabinets
- Bedroom
- Halls
- Shops

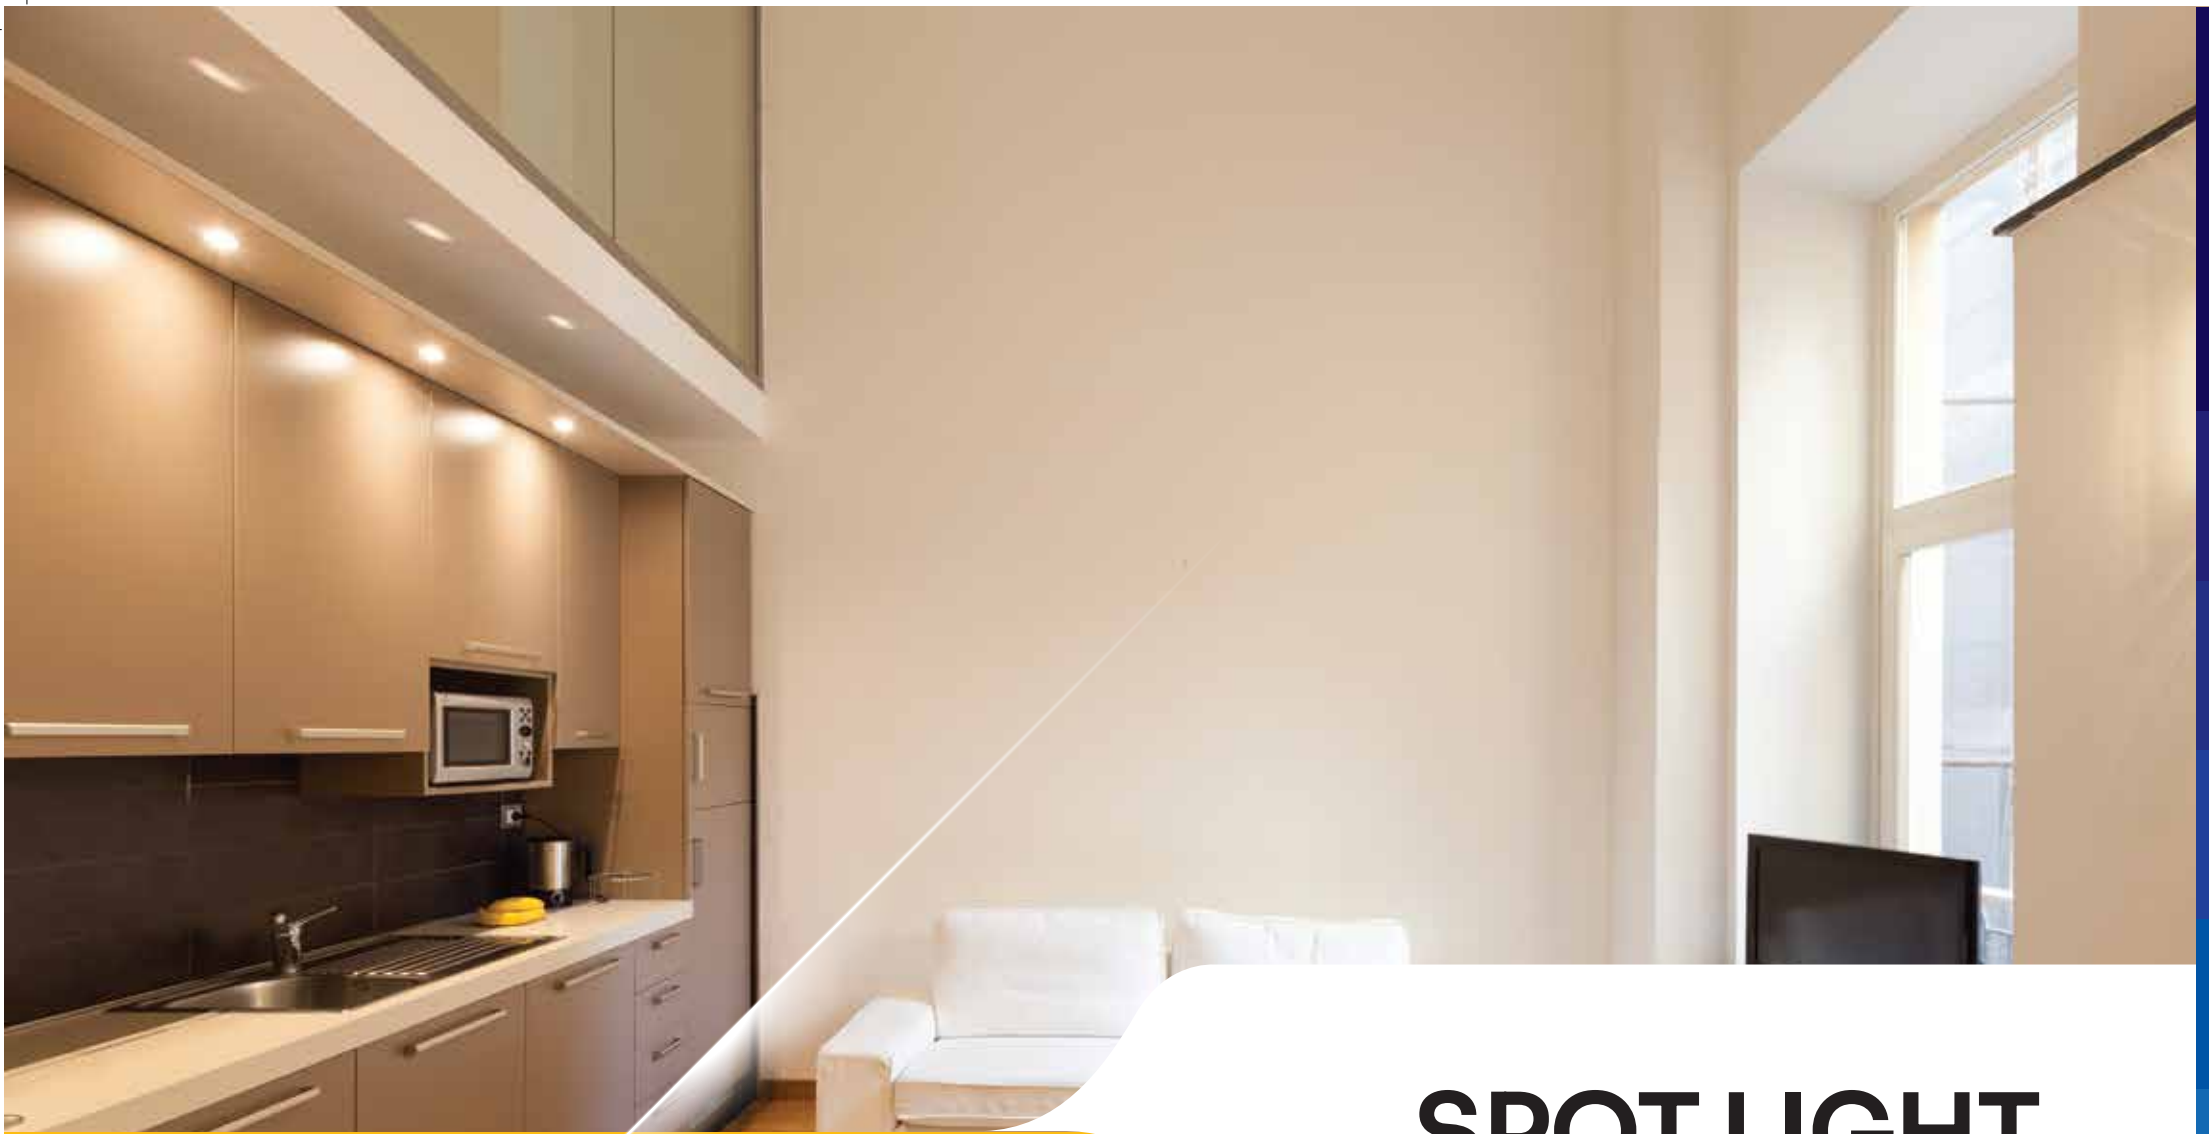

SPOT LIGHT

SURFACE SPOT LIGHT

3W, 6W

Panasonic



Efficacy
>85
lm/W



CCT
3000K
4000K
6500K



KEY FEATURES

CUSTOMER BENEFITS

Performance

Lumen Efficacy: >85 lm/W	More light with less power consumption
Wide Voltage Range: 140-275V	Wide application, covering all the T2, T3 cities
Surge Protection: >4kV	No impact on performance even with bad power conditions / surges
IP20 Protection	Robust design suitable for outdoor application (Rain and dust protection)
Life up to >25,000 Burning Hrs.	Long life
Better Thermal Management	Long life
High Voltage Application up to 440V	Can withstand 440V for 2 hrs.

Wattages	Cutout Dimensions (cm)	Product Dimensions (cm)
3W	NA	Ø6x14.7
6W	NA	Ø6x16



APPLICATIONS

- Home Decoration
- Shopping Mall
- Hall
- Lobbies

SURFACE SPOT LIGHT

10W, 15W, 20W, 30W



Panasonic



Efficacy
>80
lm/W



CCT
3000K
4000K
6500K

KEY FEATURES

CUSTOMER BENEFITS

Performance

Lumen Efficacy: >70 Lm/W (10W) >80 Lm/W (15W, 20W, 30W))	More light with less power consumption
Wide Voltage Range: 140-275V	Wide application, covering all the T2, T3 cities
Surge Protection: >2kV	No impact on performance even with bad power conditions / surges
IP20 Protection	Robust design suitable for outdoor application (Rain and dust protection)
Life up to >25,000 Burning Hrs.	Long life
High Voltage Application up to 360V	Can withstand 360V for 2 hrs.

Wattages	Cutout Dimensions (cm)	Product Dimensions (cm)
10W	NA	Ø5x16
15W	NA	Ø6.5x19.5
20W	NA	Ø8.5x21.5
30W	NA	Ø8.5x21.5



APPLICATIONS

- Home Decoration
- Shopping Mall
- Hall
- Lobbies

TRACK SPOT LIGHT

12W, 18W, 30W

Panasonic



Efficacy
>70
lm/W



CCT
3000K
4000K
6500K



KEY FEATURES

CUSTOMER BENEFITS

Performance

Lumen Efficacy: 30W-80 lm/W(*CW),
12W & 18W - 70 lm/W(*CW)

Uniform Light Diffusion

Multiple CCT Pptions

25,000+ Hours Life

Wide Voltage Range: 140-275V

Surge Protection: 4kV

High Voltage Protection: 440V

Tilttable & 355° Rotation Design

Premium Aesthetic Body Design

Energy saving

Comfortable illumination

Perfect for decorative & ambient lighting

Lower maintenance

Stable performance even in fluctuation supply

Better performance even with bad power
conditions / surges

Can withstand 440V for 2 hours

Accurate beam adjustment for focused lighting

Adds a stylish visual appeal, elevating the
overall ambience of the space

Wattages	Cutout Dimensions (cm)	Product Dimensions (cm)
12W	NA	Ø9.7x18
18W	NA	Ø9.7x20.8
30W	NA	Ø9.7x23



APPLICATIONS

- Shopping Malls
- Museums
- Hotels
- Car Showrooms
- Brand Business Halls

SPOT LIGHT 2W

Panasonic



Efficacy
60
lm/W



CCT
3000K, 6000K,
Red, Green, Blue, Pink



KEY FEATURES

CUSTOMER BENEFITS

Performance

Spotlight with Low Depth Housing	Suitable for small spaces and compact design
Wide Voltage Range: 180-270V	Wide application, covering all the T2, T3 cities
Surge Protection: 2kV	No impact on performance even with bad power conditions / surges
Prismatic Diffuser	Glare less light with spot application
Life up to >15,000 Burning Hrs.	Long life

Wattages	Cutout Dimensions (cm)	Product Dimensions (cm)
2W	Ø3.5	Ø4.2x1.85



APPLICATIONS

- Cabinets
- Bedroom
- Halls
- Shops



OUTDOOR

ALUMINIUM FLOOD LIGHT

30W, 50W, 100W

Panasonic



Efficacy
>100
lm/W



CCT
3000K
6500K

KEY FEATURES

CUSTOMER BENEFITS

Performance

IP65 & IK07	Can install outdoor area
Secondary Optics with 90° Beam Angle	For better light output. High intensity. No light loss
Wide Voltage Range: 140-275	Wide application, covering all the T2, T3 cites
Surge Protection" >4kV Additional 10KV SPD in 150W	Better performance even with bad power conditions / surges
Life up to 30,000 Burning Hrs.	Long life
Better Lumen Maintenance	Better consistency in lux / lighting levels through out life
Photo-biologically Safe Light	Eye comfort
High Voltage Application up to 440V	Can withstand 440V for 120 mins.

Wattages	Cutout Dimensions (cm)	Product Dimensions (cm)
30W	NA	16.8x13.8x2.9
50W	NA	27.4x23.6x3.4
100W	NA	27.4x23.6x3.4



APPLICATIONS

- Outdoor
- Shops
- Party Hall

ALUMINIUM FLOOD LIGHT

150W, 200W

Panasonic



Efficacy
>100
lm/W



CCT
3000K
6500K



KEY FEATURES	CUSTOMER BENEFITS
Performance	
IP65 & IK07	Can install outdoor area
Secondary Optics with 90° Beam Angle	For better light output. High Intensity. No light loss
Wide Voltage Range: 140-275	Wide application, covering all the T2, T3 cites
Surge protection > 4kV Additional 10KV SPD in 150W	Better performance even with bad power conditions / surges
Life up to 30,000 Burning Hrs.	Long life
Better Lumen Maintenance	Better consistency in lux / lighting levels through out life
Photo-biologically Safe Light	Eye comfort
High Voltage Application up to 440V	Can withstand 440V for 120 mins.

Wattages	Cutout Dimensions (cm)	Product Dimensions (cm)
150W	NA	27.4x23.6x3.4
200W	NA	29.9x25.5x3.5



APPLICATIONS

- Outdoor
- Shops
- Party Hall

FLOOD LIGHT

20W, 30W, 50W, 100W



Efficacy
>100
lm/W



CCT
3000K
6500K

KEY FEATURES

CUSTOMER BENEFITS

Performance

IP66	Install outdoor area
IK07	Robust design to withstand high impact
Wide Voltage Range: 140-275V	Wide application, covering all the T2, T3 cites
Surge Protection: > 4kV	Better performance even with bad power conditions / surges
Life up to >30,000 Burning Hrs.	Long life
Better Lumen Maintenance	Better consistency in lux / lighting levels through out life
Photo-biologically Safe Light	Eye comfort

Wattages	Cutout Dimensions (cm)	Product Dimensions (cm)
20W	NA	12.1x11.3x4.3
30W	NA	14.2x12.9x4.3
50W	NA	16.9x15.8x5.5
100W	NA	20.2x21.2x6.1



APPLICATIONS

- Outdoor Lighting
- Area Lighting
- Boundaries Area
- Parks & Sports Ground

ALUMINIUM STREET LIGHT

15W, 25W, 45W, 60W, 75W



Panasonic



Efficacy
>100
lm/W



CCT
3000K
6500K

KEY FEATURES

CUSTOMER BENEFITS

Performance

Batwing Optics	Wide spread on road to increase pole to pole distance and reduce no. of poles
IP65 & IK07 Protection	Robust design suitable for outdoor application
Wide Voltage Range: 140-270V	Wide application, covering all the T2, T3 cities
Surge Protection: 4kV	Better performance even with bad power conditions / surges
Life up to >30,000 Burning Hrs.	Long life
Better Lumen Maintenance	Better consistency in lux / lighting levels through out life
Photo-biologically Safe Light	Eye comfort
High Voltage Application up to 440V	Can withstand 440V for 120 mins.

Wattages	Cutout Dimensions (cm)	Product Dimensions (cm)
15W	NA	29.5x10.3x4.7
30W	NA	29.5x10.6x4.7
45W	NA	38.3x14.6x5
60W	NA	38.3x14.6x5
75W	NA	38.3x14.6x5



APPLICATIONS

- Street Light
- Pathway
- Garden
- Playground
- Buildings & Compound Lighting

ALUMINIUM STREET LIGHT 100W

Panasonic



Efficacy
>100
lm/W



CCT
3000K
6500K

KEY FEATURES

CUSTOMER BENEFITS

Performance

Batwing Optics	Wide spread on road to increase pole to pole distance and reduce no. of poles
IP65	Can install outdoor area
IK07	Robust design to withstand high impact
Wide Voltage Range: 140-270V	Wide application, covering all the T2, T3 cites
Surge Protection: 4kV and 10kV additional	Better performance even with bad power conditions / surges
Life up to >30,000 Burning Hrs.	Long life
Better Lumen Maintenance	Better consistency in lux / lighting levels through out life
Photo-biologically Safe Light	Eye comfort
High Voltage Application up to 440V	Can withstand 440V for 120 mins.

Wattages	Cutout Dimensions (cm)	Product Dimensions (cm)
100W	NA	44.5x17x5.7



APPLICATIONS

- Street Light
- Pathway
- Garden
- Playground
- Buildings & Compound Lighting

STREET LIGHT

20W, 30W, 50W - CW



Panasonic



Efficacy
>100
lm/W



CCT
6500K

KEY FEATURES

CUSTOMER BENEFITS

Performance

IP65	Install outdoor area
IK10	Robust design to withstand high impact
Wide Voltage Range: 140-275V	Wide application, covering all the T2, T3 cites
Surge Protection: > 4kV	Better performance even with bad power conditions / surges
Life up to 25,000 Burning Hrs.	Long life
Better Lumen Maintenance	Better consistency in lux / lighting levels through out life
Photo-biologically Safe Light	Eye comfort
High Voltage Application up to 440V	Can withstand 440V for 120 mins.

Wattages	Cutout Dimensions (cm)	Product Dimensions (cm)
20W	NA	29.1x9.1x5
30W	NA	33.4x10.5x5
50W	NA	39.6x12.9x5



APPLICATIONS

- Parks
- Car Parking
- Security Area
- Roads
- Residential Condominium
- Small Projects

ALUMINIUM SENSOR STREET LIGHT

45W

Panasonic



Sunlight
Sensitive Sensor



Efficacy
>100
lm/W



CCT
3000K
6500K

KEY FEATURES

CUSTOMER BENEFITS

Performance

Wide Voltage Range: 140-270V

Surge Protection: 4kV

IP65 Protection

IK 07 Protection

Life up to >30,000 Burning Hrs.

Separate Driver Compartment

Wide application, covering all the T2, T3 cites

Better performance even with bad power conditions / surges

Can withstand rain and dust protection

Can be used in industrial areas and high traffic

Better reliability

Hassel free servicing

Wattages

Cutout Dimensions (cm)

Product Dimensions (cm)

45W

NA

38.7x14.6x5.2



APPLICATIONS

- Street Light
- Pathway
- Garden
- Playground
- Buildings & Compound Lighting

PC SENSOR STREET LIGHT 50W

Panasonic



Efficacy
>100
lm/W



CCT
6500K



Sunlight
Sensitive Sensor

KEY FEATURES

CUSTOMER BENEFITS

Performance

Wide Voltage Range: 140-270V

Wide application, covering all the T2, T3 cites

Surge Protection: 4kV

Better performance even with bad power conditions / surges

IP65 Protection

Can withstand rain and dust protection

IK10 Protection

Can be used in industrial areas and high traffic

Life up to >25,000 Burning Hrs.

Better reliability

Separate Driver Compartment

Hassel free servicing

Wattages

Cutout Dimensions (cm)

Product Dimensions (cm)

50W

NA

39.6x12.9x5



APPLICATIONS

- Street Light
- Pathway
- Garden
- Playground
- Buildings & Compound Lighting

STEP LIGHT 3W, 6W



3W



6W



KEY FEATURES	CUSTOMER BENEFITS
Performance	
Die Cast Aluminium	Robust design, non-corrosive body
IP65 & IK07	Can install outdoor area
Wide Voltage Range: 140-275V	Wide application, covering all the T2, T3 cites
Surge Protection: 4kV	Better performance even with bad power conditions / surges
Life up to >25,000 Burning Hrs.	Long life
Better Lumen Maintenance	Better consistency in lux / lighting levels through out life
Photo-biologically Safe Light	Eye Comfort

Wattages	Cutout Dimensions (cm)	Product Dimensions (cm)
3W	NA	8.4x8.4x4.7
6W	NA	14.6x7x5.1



APPLICATIONS

- Staircase
- Balconies
- Terraces

BULK HEAD

10W, 12W, 20W



12W

10W/20W

Panasonic



Efficacy
>90
lm/W



CCT
3000K
6500K

KEY FEATURES

CUSTOMER BENEFITS

Performance



Lumen Efficacy: > 90 Lm/W	More light with less power consumption
Wide Voltage Range: 140-270V	Wide application, covering all the T2, T3 cites
Surge Protection: 4kV	No impact on performance even with bad power conditions / surges
IP65 Product	Can withstand rain and dust protection
Life up to >25,000 Burning Hrs.	Long life
Slim Design with Surface Fitting	Low depth bulk head for better aesthetic

Wattages	Cutout Dimensions (cm)	Product Dimensions (cm)
10W	NA	17.1x7.2x4.6
12W	NA	23.3x10.7x5
20W	NA	21.1x10.3x5.8



APPLICATIONS

- Lawns
- Gardens
- Pathways
- Courtyard
- Factories

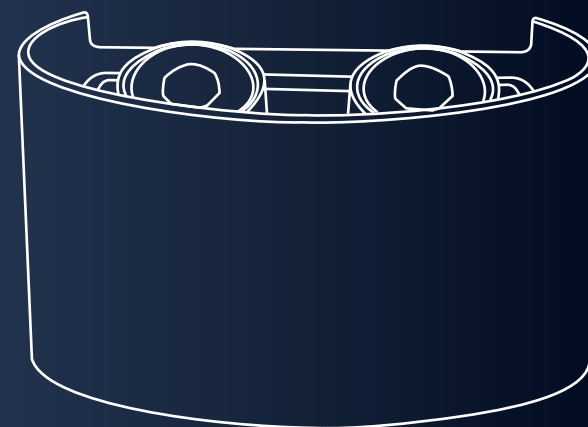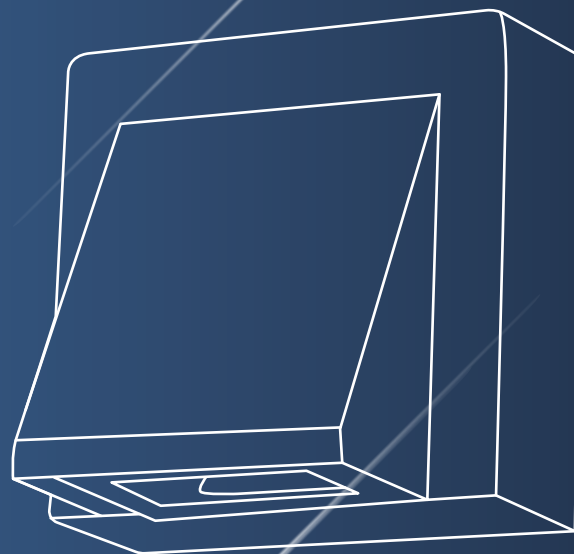

Wall Light

PC UP DOWN LIGHT (K-TYPE)

3W, 6W



1Way 3W

2Way 6W

Panasonic



Efficacy
>90
lm/W



CCT
3000K
6500K

KEY FEATURES

CUSTOMER BENEFITS

Performance

IP65	Can install outdoor area
IK07	Withstand impact of 2J
Wide Voltage Range: 140-275V	Wide application, covering all the T2, T3 cites
Surge Protection: >4kV Over Voltage Protection 440V	Better performance even with bad power conditions / surges
Life up to >25,000 Burning Hrs.	Long life
Better Lumen Maintenance	Better consistency in lux / lighting levels through out life
Photo-biologically Safe Light	Eye comfort
PC Housing	UV stabilised & fire reatrdant

Wattages	Cutout Dimensions (cm)	Product Dimensions (cm)
3W	NA	8.4x8.8x6.6
6W	NA	16.2x8.8x6.6



APPLICATIONS

- Residential
- Retail Shop
- Service Area
- Hospitality

ALUMINIUM UP DOWN LIGHT (K-TYPE)

6W, 12W



One Way

Two Way - Up & Down

Panasonic



Efficacy
>100
lm/W



CCT
3000K
4000K
6500K

KEY FEATURES

CUSTOMER BENEFITS

Performance

IP20	Can install outdoor area
IK07	Withstand impact of 2J
Wide Voltage Range: 140-275V	Wide application, covering all the T2, T3 cities
Surge Protection: >2kV Over Voltage Protection 440V	Better performance even with bad power conditions / surges
Life up to >25,000 Burning Hrs.	Long life
Better Lumen Maintenance	Better consistency in lux / lighting levels through out life
Photo-biologically Safe Light	Eye comfort

Wattages	Cutout Dimensions (cm)	Product Dimensions (cm)
6W	NA	8x8x6.3
12W	NA	14.5x8x6.3



APPLICATIONS

- Residential
- Retail Shop
- Service Area
- Hospitality

DYNA[®]

UP DOWN WALL LIGHT

6W, 12W



Four Way
2x2 Up & Down



Two Way
1x1 Up & Down

Panasonic



Efficacy
>75
lm/W



CCT
CW, NW, WW

KEY FEATURES

CUSTOMER BENEFITS

Performance

Wide Voltage Range: 140-270V

Wide application, covering all the T2, T3 cites

Surge Protection: 4kV

Better performance even with bad power conditions / surges

IP54

Install outdoor area

AL Housing

Better heat dissipation and life

Life up to >25,000 Burning Hrs.

Better reliability

Wattages	Cutout Dimensions (cm)	Product Dimensions (cm)
6W	NA	10.34x8.57x3.41
12W	NA	12.35x10.35x3.4



APPLICATIONS

- Lawns
- Gardens
- Pathways
- Halls
- Hotels
- Corridors
- Restaurants

DYNA[®]

ELEVATION WALL LIGHT

4W, 4 Way



Panasonic



Efficacy
>75
lm/W



CCT
3000K
6500K

KEY FEATURES

CUSTOMER BENEFITS

Performance

IP65	Install outdoor area
IK07	Robust design to withstand high impact
Wide Voltage Range: 140-275V	Wide application, covering all the T2, T3 cities
Surge Protection: >4kV	Better performance even with bad power conditions / surges
Life up to >25,000 Burning Hrs.	Long life
Better Lumen Maintenance	Better consistency in lux / lighting levels through out life
Photo-biologically Safe Light	Eye comfort

Wattages	Cutout Dimensions (cm)	Product Dimensions (cm)
4W	NA	7.5x7.5x5.4



APPLICATIONS

- Outdoor Lighting
- Residential Settings
- Commercial Spaces
- Hospitality Industry
- Retail Spaces

DYNA[®]

ELEVATION WALL LIGHT

2W-2 Way, 4W-4 Way



2 Way
2W



4 Way
4W

Panasonic



Efficacy
>70
lm/W



CCT
3000K
6500K

KEY FEATURES	CUSTOMER BENEFITS
Performance	
IP54	Install outdoor area
IK07	Robust design to withstand high impact
Wide Voltage Range: 140-275V	Wide application, covering all the T2, T3 cities
Surge Protection: 4kV Over Voltage Protection 440V	Better performance even with bad power conditions / surges
Life up to >25,000 Burning Hrs.	Long life
Better Lumen Maintenance	Better consistency in lux / lighting levels through out life
Photo-biologically Safe Light	Eye comfort

Wattages	Cutout Dimensions (cm)	Product Dimensions (cm)
2W - 4 Way	NA	7.8x7.8x4.6
4W - 4 Way	NA	7.8x7.8x4.6



APPLICATIONS

- Residential Settings
- Commercial Spaces
- Hospitality
- Industry
- Retail Space

DYNA[®]

UP DOWN WALL LIGHT

2W, 4W, 6W, 8W, 10W



Efficacy
70
lm/W



CCT
3000K
6500K

KEY FEATURES

CUSTOMER BENEFITS

Performance

IP54	Install outdoor area
IK07	Robust design to withstand high impact
Wide Voltage Range: 140-275V	Wide application, covering all the T2, T3 cities
Surge Protection: 4kV Over Voltage Protection 440V	Better performance even with bad power conditions / surges
Life up to >25,000 Burning Hrs.	Better reliability
Better Lumen Maintenance	Better consistency in lux / lighting levels through out life
Photo-biologically Safe Light	Eye comfort

Wattages	Cutout Dimensions (cm)	Product Dimensions (cm)
2W - 1x2way	NA	8.5 x 7.8 x 4
4W - 2x2way	NA	12.0 x 7.8 x 4
6W - 3x2way	NA	16.8 x 7.8 x 4
8W - 4x2way	NA	20.8 x 7.8 x 4
10W - 5x2way	NA	26.0 x 7.8 x 4



APPLICATIONS

- Residential Settings
- Commercial Spaces
- Hospitality
- Industry
- Wellness Spaces
- Retail Space

DYNA[®]

WALL LIGHT

15W

Panasonic



Efficacy
>80
lm/W



CCT
3000K, 4000K,
6500K



Oblong



Round



Square

KEY FEATURES

CUSTOMER BENEFITS

Performance

Surge Protection: 4kV	No impact on performance even with bad power conditions / surges
High Voltage Protection: 440V	Can withstand 440V for 120 Mins
Wide Voltage Range: 180-270V	Wide application, covering all the T2, T3 cites
Life up to >25,000 Burning Hrs.	Long life
Better Lumen Maintenance	Better consistency in lux / lighting levels through out life
Photo-biologically Safe Light	Eye comfort
IP65 Protection	Suitable for outdoor application

Wattages	Cutout Dimensions (cm)	Product Dimensions (cm)
15W - Square	NA	10.8 x 10.8 x 13.5
15W - Round	NA	10.8 x 10.8 x 13.5
15W - Oblong	NA	17.3 x 7.7 x 12.2

APPLICATIONS

- Residential Settings
- Commercial Spaces
- Hospitality
- Industry
- Wellness Spaces
- Retail Space



MIRROR LIGHT 10W



Adjustable Flap
(Indirect Lighting
to Reduce Glare)

Panasonic



Efficacy
>80
lm/W



CCT
3000K, 4000K,
6500K

KEY FEATURES

CUSTOMER BENEFITS

Performance



Surge Protection: 4kV	Better performance even with bad power conditions / surges
Wide Voltage Range: 140-275V	Wide application, covering all the T2, T3 cites
Life up to >25,000 Burning Hrs.	Long life
Adjustable Flap	Indirect lighting to reduce glare
Photo-biologically Safe Light	Eye comfort
Recessed Type	Wide range on application

Wattages	Cutout Dimensions (cm)	Product Dimensions (cm)
10W	NA	42 x 5.3 x 4.9



APPLICATIONS

- Residential
- Small Office
- Service Area

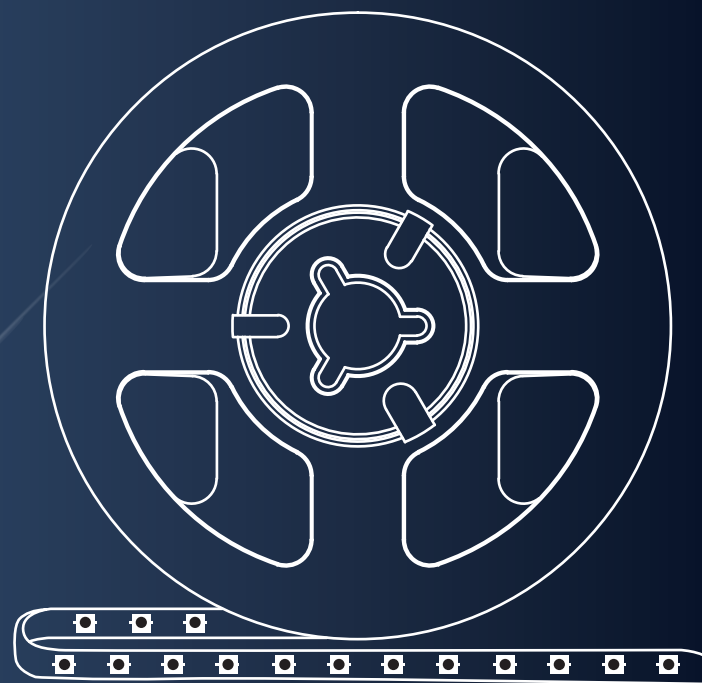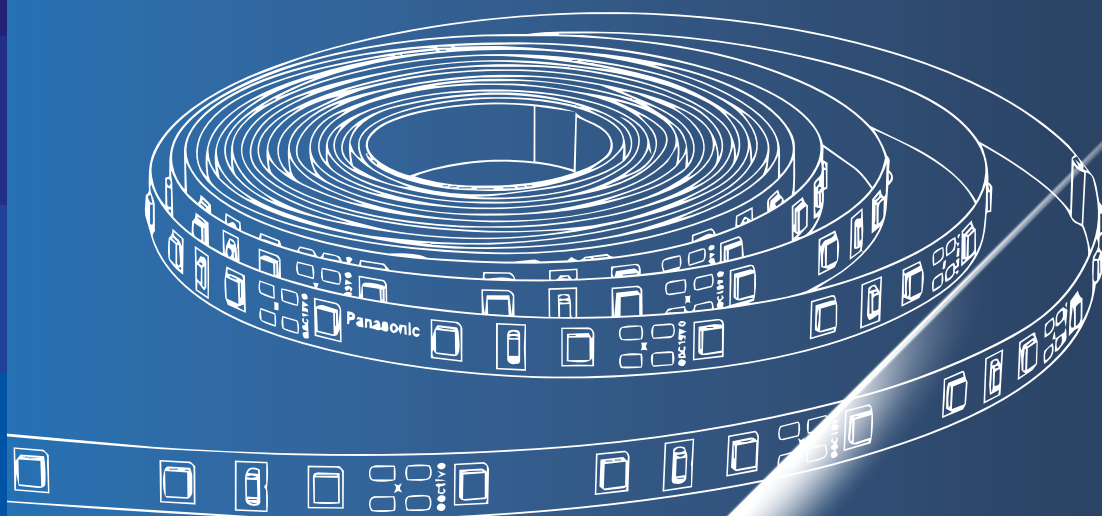

Decorative

ROPE LIGHT 45 METRE

6W - 60 LED/Mtr



Panasonic



CCT
3000K, 4000K, 6500K,
Red, Green, Blue, Amber, Pink

KEY FEATURES

CUSTOMER BENEFITS

Performance

Input Voltage: 240V AC	Direct plug into AC supply with 2 pin plug
Can be cut at Different Length after Each 1 Meter	Customized lighting as per requirement
IP65 Rope Light	Suitable for indoor & outdoor applications
Rectifier & LED Life up to >30,000 Burning Hrs.	Long life
Surge Protection upto 4kV	Better performance even with bad power conditions surges
Easy Installation in Small Spaces	Suitable for cove lighting
Photo-biologically Safe Light	Eye comfort

Wattages	Cutout Dimensions (cm)	Product Dimensions (cm)
6W / Mtr	NA	4500x1.1x0.5



APPLICATIONS

- Home Decoration
- Cove Lighting
- Porches
- Garden

ROPE LIGHT 20 METRE & 45 METRE

8W - 120 LED/Mtr



Panasonic



CCT
3000K, 4000K, 6500K,
Red, Green, Blue, Amber, Pink

KEY FEATURES

CUSTOMER BENEFITS

Performance

Input Voltage: 240V AC	Direct plug into AC supply with 2 pin plug
Can be cut at different length After each 1 Meter	Customized lighting as per requirement
IP65 Rope Light	Suitable for indoor & outdoor applications
Rectifier & LED Life up to >30,000 Burning Hrs.	Long life
Surge Protection upto 4kV	Better performance even with bad power conditions surges
Easy Installation in Small Spaces	Suitable for cove lighting
Photo-biologically Safe Light	Eye comfort

Wattages	Cutout Dimensions (cm)	Product Dimensions (cm)
8W - 120 LED/Mtr (20 Mtr)	NA	2000x1.1x0.5
8W - 120 LED/Mtr (45 Mtr)	NA	4500x1.1x0.5



APPLICATIONS

- Home Decoration
- Cove Lighting
- Porches
- Garden

Decorative

Batten

Bulb

TRI COLOR ROPE LIGHT 18 METRE

120 LED/Mtr



Panasonic



Tri-Colour



KEY FEATURES

CUSTOMER BENEFITS

Performance

Input Voltage: 240V AC	Direct plug into AC supply with 2 pin plug
IP65 Rope Light	Suitable for indoor & outdoor applications
Rectifier & LED Life up to >30,000 Burning Hrs.	Long life
Surge Protection upto 4.0kV	Better performance even with bad power conditions surges
Easy Installation in Small Spaces	Suitable for cove lighting
Photo-biologically Safe Light	Eye comfort

Wattages	Cutout Dimensions (cm)	Product Dimensions (cm)
120 LED/Mtr, 18 Mtr	NA	1800x1.1x0.5

APPLICATIONS

- Home Decoration
- Cove Lighting
- Porches
- Garden



RGB ROPE LIGHT 20 METRE

60 LED/Mtr



RGB

KEY FEATURES	CUSTOMER BENEFITS
Performance	
Input Voltage: 240V AC	Direct plug into AC supply with 2 pin plug
IP65 Rope Light	Suitable for indoor & outdoor applications
Surge Protection upto 2.5kV	Better performance even with bad power conditions surges
Life up to >30,000 Burning Hrs.	Long life
Different Modes for Brightness	Customer can have different brightness levels for different colors of RGB
Easy Installation in Small Spaces	Suitable for cove lighting
Photo-biologically Safe Light	Eye comfort

Wattages	Cutout Dimensions (cm)	Product Dimensions (cm)
60 LED/mtr, 20mtr	NA	2000x1.5x0.6



APPLICATIONS

- Home Decoration
- Festival Decoration
- Malls
- Gardens
- Shops
- Brand Boards

RGB STRIP LIGHT

5 METRE

60 LED/Mtr

Panasonic



Suitable driver current rating: 2 Amp



Changeable colour
with Remote

KEY FEATURES	CUSTOMER BENEFITS
Performance	
Changeable Colour with Remote	16 colour modes available
Dimmable	Dimming of light is possible
Can be cut at Different Length	Customised lighting as per requirement
With RGB Controller and Remote	Creates ambience
Life up to >50,000 Burning Hrs.	Long life
Easy Installation	Suitable for cove lighting
Photo-biologically Safe Light	Eye comfort

Wattages	Cutout Dimensions (cm)	Product Dimensions (cm)
60 LED/Mtr	NA	500x1x0.2



APPLICATIONS

- Home Decoration
- Cove Lighting
- Display
- Shops

STRIP LIGHT 5 METRE

25W - 60LED/Mtr | IP 20
36W - 120LED/Mtr | IP 20
60W - 240LED/Mtr | IP 20



Suitable driver current rating:
60LED: 2 Amp | 120LED: 3 Amp | 240LED: 5 Amp

Panasonic



CCT
3000K, 4000K, 6500K,
Red, Green, Blue, Amber, Pink

KEY FEATURES

CUSTOMER BENEFITS

Product Design & Performance

Input Voltage: 12V DC	
Ingress Protection: IP20	Suitable for Indoor as well as outdoor application
Life up to >50,000 Burning Hrs.	Long life
Easy Installation	Suitable for cove lighting
Can be cut at Different Length	Customised lighting as per requirement

Wattages	Cutout Dimensions (cm)	Product Dimensions (cm)
25W - 5 Mtr	NA	500x0.8x0.2
36W - 5 Mtr	NA	500x0.8x0.2
60W - 5 Mtr	NA	500x1x0.2



APPLICATIONS

- Home Decoration
- Cove Lighting
- Display
- Shops

Decorative

Batten

Bulb

DECOFANCY STRING LIGHT 10 METRE

46LED/10Mtr



Panasonic



Red, Green, Blue, Pink, Yellow,
White, Warm White, Multicolour

KEY FEATURES

CUSTOMER BENEFITS

Performance

100% Copper wire for LED connections	Better electrical conductivity
High Voltage Protection: 440V	Can withstand 440V for 30 mins.
Wide Voltage Range: 150-270V	Wide application, covering all the T2, T3 cites
Photo-biologically Safe Light	Eye comfort

Wattages	Cutout Dimensions (cm)	Product Dimensions (cm)
46 LED/10m	NA	1000



APPLICATIONS

- Home Decoration
- Cove Lighting
- Porches
- Garden

STRIP LED DRIVER

12V-3Amp, 12V-5Amp
12V-10Amp, 12V-14Amp



12V-3Amp



12V-5Amp



12V-10Amp / 12V-14Amp



Efficacy
>85%

KEY FEATURES

CUSTOMER BENEFITS

Performance

High Efficiency >85%	Energy saving
2 Years Warranty	Product is more reliable
Product is Designed for High Ampere Load Application	Driver is suitable for 1x5mtr (3A & 5A), 2 x5mtr (10A) & 3x5mtr (14A) LED strip light which will cover more area
Wide Voltage Range: 180-270Vac	Performance consistency
Isolated Driver, Class II Product & SELV	Better user safety
Open and Short Circuit Protection	Ensure user safety during the operation & installation
Surge Protection: 4kV	More reliable and withstand high spikes/surge

Wattages	Cutout Dimensions (cm)	Product Dimensions (cm)
12V - 3 Amp	NA	8.3x4.4x2.4
12V - 5 Amp	NA	4.3x4.4x2.4
12V - 10 Amp	NA	16x4.6x3.3
12V - 14 Amp	NA	16x4.6x3.3



APPLICATIONS

- Home Decoration
- Cove Lighting
- Display
- Shop



BATTEN

THEALED HYPER BATTEN

70W, 100W



Efficacy
>100
lm/W



CCT
6500K



KEY FEATURES

CUSTOMER BENEFITS

Performance

Lumen Efficacy: 100Lm/W(6500K)
70W: 7000lm (6500K),
100W: 10000lm (6500K)

More light with less power consumption

Surge Protection: 4kV

No impact on performance even with bad
power conditions / surges

High Voltage Protection: 440V

Can withstand 440V for 30 mins.

Wide Voltage Range: 140-275V

Wide application, covering all the T2, T3 cities

Life up to >25,000 Burning Hrs.

Long life

Photo-biologically Safe Light

Eye comfort

Wattages	Cutout Dimensions (cm)	Product Dimensions (cm)
70W	NA	110.0x5.25x3.75
100W	NA	113.5x5.25x3.75



APPLICATIONS

- Residential
- Small Offices
- Service Area

THEALED PRO BATTEN

50W



Panasonic



Efficacy
>100
lm/W



CCT
3000K
4000K
6500K

KEY FEATURES

CUSTOMER BENEFITS

Performance

Lumen Efficacy: 100lm/W(6500K)
Lumen: 5000lm (6500K)

More light with less power consumption

Surge Protection: 4kV

No Impact on performance even with bad power conditions / surges

High Voltage Protection: 440V

Can withstand 440V for 30 mins.

Wide Voltage Range: 140-275V

Wide application, covering all the T2, T3 cities

Life up to >25,000 Burning Hrs.

Long life

Sleek Design and
Better Thermal Management

Long life and better lumen consistency

Photo-biologically Safe Light

Eye comfort

Wattages

Cutout Dimensions (cm)

Product Dimensions (cm)

50W

NA

120x7.5x2.5

APPLICATIONS

- Residential
- Small Offices
- Service Area



THEALED ACE BATTEN

24W



Panasonic



Efficacy
>100
lm/W



CCT
3000K
4000K
6500K

KEY FEATURES

CUSTOMER BENEFITS

Performance

Lumen Efficacy: >100lm/W
Lumen: 2400lm (6500K)

More light with less power consumption

Surge Protection: >4kV

No impact on performance even with
bad power conditions / surges

High Voltage Protection: 440V

Can withstand 440V for 30 mins.

Wide Voltage Range: 140-275V

Wide application, covering all the T2, T3 cities

Life up to >25,000 Burning Hrs.

Long life

Photo-biologically Safe Light

Eye comfort

Wattages

Cutout Dimensions (cm)

Product Dimensions (cm)

24W

NA

110 x 2.2 x 2.9



APPLICATIONS

- Residential
- Small Offices
- Service Area

THEALED ACE BATTEN (1 FT) 10W

Panasonic



Efficacy
>100
lm/W



CCT
3000K
4000K
6500K



KEY FEATURES

CUSTOMER BENEFITS

Performance

Lumen Efficacy: 100 lm/W Lumen: 1000lm (6500K)	More light with less power consumption
Surge Protection: 4kV	No impact on performance even with bad power conditions / surges
High Voltage Protection: 440V	Can withstand 440V for 30 mins.
Wide Voltage Range: 160-270V	Wide application, covering all the T2, T3 cites
Life up to >25,000 Burning Hrs.	Long life
Better Lumen Maintenance	Better consistency in lux / lighting levels through out life
Photo-biologically Safe Light	Eye comfort

Wattages	Cutout Dimensions (cm)	Product Dimensions (cm)
10W	NA	26.5x2.2x2.9



APPLICATIONS

- Residential
- Small Offices
- Service Area

THEALED ALUMINIUM BATTEN

40W



Panasonic



Efficacy
>100
lm/W



CCT
3000K
4000K
6500K

KEY FEATURES

CUSTOMER BENEFITS

Performance

Lumen Efficacy: >100lm/W Lumen: 4000lm (6500K)	More light with less power consumption
Surge Protection: >4kV	Better performance even with bad power conditions / surges
High Voltage Protection: 440V	Can withstand 440V for 30 mins.
Wide Voltage Range: 140-275V	Wide application, covering all the T2, T3 cites
Life up to >25,000 Burning Hrs.	Long life
40W Batten in Durable Aluminium Housing	High performance due to better heat dissipation
Photo-biologically Safe Light	Eye comfort


Wattages	Cutout Dimensions (cm)	Product Dimensions (cm)
40W	NA	118.2x2.3x3.74



APPLICATIONS

- Residential
- Small Offices
- Service Area

THEALED BATTEN 36W



Panasonic



Efficacy
>100
lm/W



CCT
3000K
4000K
6500K

KEY FEATURES

CUSTOMER BENEFITS

Performance

Lumen Efficacy: >100lm/W
Lumen: 3600lm (6500K)

More light with less power consumption

Surge Protection: 4kV

No impact on performance even with
bad power conditions / surges

High Voltage Protection 440V

Can withstand 440V for 30 mins.

Wide Voltage Range: 140-275V

Wide application, covering all the T2, T3 cities

Life up to >25,000 Burning Hrs.

Long life product

Better Lumen Maintenance

Better consistency in lux / lighting levels
through out life

Photo-biologically Safe Light

Eye comfort

Wattages

Cutout Dimensions (cm)

Product Dimensions (cm)

36W

NA

113.5x2.3x3.3



APPLICATIONS

- House
- Shops

THEALED ACE BATTEN

22W



Efficacy
>100
lm/W



CCT
3000K
4000K
6500K

KEY FEATURES

CUSTOMER BENEFITS

Performance

Lumen Efficacy: >100lm/W
Lumen: 2200 lm (6500K)

More light with less power consumption

Surge Protection: 4kV

Better performance even with bad power conditions / surges

High Voltage Protection: 440V

Can withstand 440V for 30 mins.

Wide Voltage Range: 140-275V

Wide application, covering all the T2, T3 cities

Life up to >25,000 Burning Hrs.

Long life

Photo-biologically Safe Light

Eye comfort

Wattages

Cutout Dimensions (cm)

Product Dimensions (cm)

22W

NA

110x2.2x2.9



APPLICATIONS

- Residential
- Small Offices
- Shops
- Service Area

THEALED ACE BATTEN 20W

Panasonic



Efficacy
>100
lm/W



CCT
3000K
4000K
6500K



KEY FEATURES

CUSTOMER BENEFITS

Product Design & Performance

Lumen Efficacy: >100lm/W
Lumen: 2000lm (6500K)

More light with less power consumption

Surge Protection: >4kV

No impact on performance even with
bad power conditions / surges

High Voltage Protection: 440V

Can withstand 440V for 30 mins.

Wide Voltage Range: 140-275V

Wide application, covering all the T2, T3 cites

Life up to >25,000 Burning Hrs.

Long life

Photo-biologically Safe Light

Eye comfort

Wattages

Cutout Dimensions (cm)

Product Dimensions (cm)

20W

NA

110x2.2x2.9



APPLICATIONS

- Residential
- Small Offices
- Service Area

THEALED ACE RAINBOW BATTEN

20W



CCT
Red, Green,
Blue, Pink



KEY FEATURES

CUSTOMER BENEFITS

Product Design & Performance

Surge Protection: >4kV	No impact on performance even with bad power conditions / surges
High Voltage Protection: 440V	Can withstand 440V for 30 mins.
Wide Voltage Range: 140-275V	Wide application, covering all the T2, T3 cities
Life up to >25,000 Burning Hrs.	Long life
Photo-biologically Safe Light	Eye comfort

Wattages	Cutout Dimensions (cm)	Product Dimensions (cm)
20W	NA	110x2.2x2.9



APPLICATIONS

- Residential
- Small Offices
- Restaurants
- Game Zones

THEALED ACE BATTEN

5W, 10W



Panasonic



Efficacy
>100
lm/W



CCT
3000K
4000K
6500K

KEY FEATURES

CUSTOMER BENEFITS

Performance

Lumen Efficacy: >100lm/W
Lumen: 5W: 500lm (6500K),
10W: 1000lm (6500K)

More light with less power consumption

Surge Protection: >4kV

No impact on performance even with
bad power conditions / surges

High Voltage Protection: 440V

Can withstand 440V for 30 mins.

Wide Voltage Range: 140-275V

Wide application, covering all the T2, T3 cities

Life up to >25,000 Burning Hrs.

Long life

Photo-biologically Safe Light

Eye comfort

Wattages	Cutout Dimensions (cm)	Product Dimensions (cm)
5W	NA	26.5x2.2x2.9
10W	NA	53.5x2.2x2.9



APPLICATIONS

- Residential
- Small Offices
- Service Area

ALTABRIGHT ANORA BATTEN (2 FT)

20W



Efficacy
>100
lm/W



CCT
3000K
6500K

KEY FEATURES

CUSTOMER BENEFITS

Performance

Lumen Efficacy: >100lm/W
Lumen: 2000lm (6500K)

More light with less power consumption

Surge Protection: 4kV

No impact on performance even with
bad power conditions / surges

High Voltage Protection 440V

Can withstand 440V for 30 mins.

Wide Voltage Range: 140-275V

Wide application, covering all the T2, T3 cites

Life up to >25,000 Burning Hrs.

Long life product

Photo-biologically Safe Light

Eye comfort

Wattages

Cutout Dimensions (cm)

Product Dimensions (cm)

20W

NA

59.5x2.45x3.85



APPLICATIONS

- House
- Shops



BULBS

DURA HYPER LED BULB

70W | B22



Panasonic



Efficacy
>100
lm/W



CCT
6500K

KEY FEATURES

CUSTOMER BENEFITS

Product Design & Performance

Lumen Efficacy 100lm/W
Lumen: 7000 lm

More light with less power consumption

Surge Protection: 4kV

No impact on performance even with bad power conditions / surges

High Voltage Protection: 440V

Can withstand 440V for 120 mins.

Life up to >25,000 Burning Hrs.

Long life

Better Lumen Maintenance

Better consistency in lux / lighting levels through out life

Photo-biologically Safe Light

Eye comfort

Big Size Diffuser

Wide light distribution

Wattages

Cutout Dimensions (cm)

Product Dimensions (cm)

70W

NA

Ø16x26.5



APPLICATIONS

- Residence
- Shops
- Indoor Spaces

DURA HYPER LED BULB

30W, 40W, 50W | B22



Panasonic



Efficacy
>100
lm/W (6500K)



CCT
3000K
6500K

KEY FEATURES

CUSTOMER BENEFITS

Product Design & Performance

Lumen Efficacy: 100lm/W
Lumen (6500K): 30W - 3000 lm,
40W - 4000 lm, 50W - 5000 lm

More light with less power consumption

Surge protection: 4kV

No impact on performance even with bad
power conditions / surges

High Voltage Protection: 440V

Can withstand 440V for 120 mins.

Life up to >25,000 Burning Hrs.

Long life

Better Lumen Maintenance

Better consistency in lux / lighting levels
through out life

Photo-biologically Safe Light

Eye comfort

Wattages	Cutout Dimensions (cm)	Product Dimensions (cm)
30W	NA	Ø10x15
40W	NA	Ø12x16.5
50W	NA	Ø14x19



APPLICATIONS

- Residence
- Living Room &
Other Indoor Spaces

DURA MAX LED BULB

15W, 18W, 23W | B22 & E27 Cap



Panasonic



Efficacy
>90
lm/W (6500K)



CCT
3000K
6500K

KEY FEATURES

CUSTOMER BENEFITS

Product Design & Performance

Lumen Efficacy: >90lm/W
Lumen (6500K): 15W - 1350 lm,
18W - 1620 lm, 23W - 2070 lm

More light with less power consumption

Surge Protection: 4kV

No impact on performance even with bad
power conditions / surges

High Voltage Protection: 440V

Can withstand 440V for 120 mins.

Life up to >25,000 Burning Hrs.

Long life

Full Beam Diffuser

Wide light distribution

Photo-biologically Safe Light

Eye comfort

Wattages	Cutout Dimensions (cm)	Product Dimensions (cm)
15W	NA	Ø6.5x12.5
18W	NA	Ø7x13.7
23W	NA	Ø9.5x17.5



APPLICATIONS

- Residence
- Living Room &
Other Indoor Spaces

DURA SAVER LED BULB

3W, 5W | B22 & E27 Cap



Panasonic



Efficacy
>105
lm/W (6500K)



CCT
3000K
6500K

KEY FEATURES

CUSTOMER BENEFITS

Product Design & Performance

Lumen Efficacy: >105lm/W	More light with less power consumption
Lumen (6500K): 3W - 315lm, 5W - 525lm	
Surge Protection: 4kV	No impact on performance even with bad power conditions / surges
High Voltage Protection: 440V	Can withstand 440V for 120 mins
Life up to >25,000 Burning Hrs.	Long life
Full Beam Diffuser	Wide light distribution
Photo-biologically Safe Light	Eye comfort

Wattages	Cutout Dimensions (cm)	Product Dimensions (cm)
3W	NA	Ø5.5x10
5W	NA	Ø5.5x10



APPLICATIONS

- Living Rooms
- Study Rooms
- Kitchen
- Lobby and Other Indoor Areas

DURA SAVER LED BULB

7W, 9W, 12W | B22 & E27 Cap



Panasonic



Efficacy
>90
lm/W



CCT
3000K
6500K

KEY FEATURES

CUSTOMER BENEFITS

Product Design & Performance

Lumen Efficacy: >90lm/W
Lumen (6500K): 7W - 630lm,
9W - 810lm, 12W - 1080lm

More light with less power consumption

Surge Protection: 4kV

No impact on performance even with bad
power conditions / surges

High Voltage Protection: 440V

Can withstand 440V for 120 mins

Life up to >25,000 Burning Hrs.

Long life

Full Beam Diffuser

Wide light distribution

Photo-biologically Safe Light

Eye comfort

Wattages	Cutout Dimensions (cm)	Product Dimensions (cm)
7W	NA	Ø5.5x10
9W	NA	Ø6x10.6
12W	NA	Ø6x11.1



APPLICATIONS

- Living Rooms
- Study Rooms
- Kitchen
- Lobby and Other Indoor Areas

EMERGENCY BULB

9W, 12W



4 Level Battery
Safety Protection
Ensures Lithium-Ion
Battery Safety and Stability



Battery Back-up
upto 3 Hours



Protects Battery
From Over Heating



Current Interrupt Device (CID)
Protects Lithium Ion battery from
Over pressure and heat.



Fast Charging
Full Battery charge within 6 hrs



Efficacy
>90
lm/W
(on main)



CCT
6500K

KEY FEATURES

CUSTOMER BENEFITS

Product Design & Performance

Lumen Efficacy: >90lm/W	High light output 90 lm/W on mains
Lumen: 9W - 810lm, 12W - 1080lm	
Selection of Electronic Components Based of Temp. Rating	Robust component due to which less failure since product is tested at 45° ambient temperature
Backup	3 hrs. delivers light with higher efficacy on backup

BMS: Battery Management System



Over Discharge



Overcharge



Over Voltage



Over Temperature

Wattages	Cutout Dimensions (cm)	Product Dimensions (cm)
9W	NA	Ø6.5x12.1
12W	NA	Ø7.5x13.9



APPLICATIONS

- Study Table
- Living Rooms
- Shops etc.

RADAR BULB

9W



Panasonic



Efficacy
>90
lm/W



CCT
6500K



Sensor Range
4.5 mtr.
Radius



Delay
60 Sec.

KEY FEATURES

CUSTOMER BENEFITS

Product Design & Performance

Detection Range	4.5 mtr detection range for detecting even small movement
Selection of Electronic Components Based of Temp. Rating	Robust component due to which less failure since product is tested at 45° ambient temperature.
Radar Sensor	Better detection area than conventional PIR lamp, since exposed part of PIR is lesser than radar sensor
ON-OFF Timing	After sensing presence bulb switch ON and remains ON for 60 seconds and when no movement it remains OFF
Photo-biologically Safe Light	Eye comfort

Wattages	Cutout Dimensions (cm)	Product Dimensions (cm)
9W	NA	Ø6x11



APPLICATIONS

- Homes
- Lobbies & Passages

DURA NOVA RAINBOW COLOUR LED BULB

7W | B22



COLOUR
Red, Green,
Blue, Yellow, Pink

KEY FEATURES

CUSTOMER BENEFITS

Product Design & Performance

Better Efficacy	More light with less power consumption
Surge Protection: 4kV	No impact on performance even with bad power conditions / surges
High Voltage Protection: 440V	Can withstand 440V for 120 mins.
Life up to >25,000 Burning Hrs.	Long life
Better Lumen Maintenance	Better consistency in lux / lighting levels through out life
Photo-biologically Safe Light	Eye comfort

Wattages	Cutout Dimensions (cm)	Product Dimensions (cm)
7W	NA	Ø7x10.1



APPLICATIONS

Suitable for decorative
lighting applications
in indoor spaces

RGB AUTO CHANGING COLOUR BULB

0.5W



COLOUR
Multicolour

KEY FEATURES

CUSTOMER BENEFITS

Product Design & Performance

RGB Colour	Just plug and play the auto colour changing bulb, once switched ON, the product will change colour automatically
Selection of Electronic Components Based of Temp. Rating	Robust component due to which less failure since product is tested at 45° ambient temperature
Function	Auto colour changing 0.5W bulb ideal for using in puja ghar, decoration and on festivals
Beam Angle	Wide beam angle (120°) - light reaches to every corner of room
Photo-biologically Safe Light	Eye comfort

Wattages	Cutout Dimensions (cm)	Product Dimensions (cm)
0.5W	NA	Ø4.5x7



APPLICATIONS

- Puja Ghar
- Bed Rooms
- Restaurant, etc.

DURA SAVER CANDLE BULB

4W - Lens Type



Panasonic



Efficacy
>90
lm/W



CCT
3000K
6500K

KEY FEATURES

CUSTOMER BENEFITS

Product Design & Performance

Lumen Efficacy: >90 lm/W Lumen (6500K): 4W - 360lm	High light output with low power consumption gives brighter light in dark areas
UV Resistant Diffuser	Protect diffuser from getting yellowing in long run
Selection of Electronic Components Based of Temp. Rating	Robust component due to which less failure since product is tested at 45° ambient temperature
PA+AL Housing	Better heat dissipation in the product in order to achieve the desired lumen maintenance and life
Beam Angle	Wide beam angle (120°) - light reaches to every corner of room
Photo-biologically Safe Light	Eye comfort

Wattages	Cutout Dimensions (cm)	Product Dimensions (cm)
4W	NA	Ø3.5x10.4



APPLICATIONS

- Living Rooms
- Chandeliers
- Showrooms etc.

DURA SAVER CANDLE BULB

4W



Efficacy
>90
lm/W



CCT
3000K
6500K

KEY FEATURES

CUSTOMER BENEFITS

Product Design & Performance

Lumen Efficacy: >90 lm/W
Lumen (6500K): 4W - 360lm

High light output with low power consumption

Selection of Electronic Components

Robust component due to which less failure since based of temp. rating product is tested at 45° ambient temperature

PA+AL Housing

Better heat dissipation in the product in order to achieve the desired lumen maintenance & long life

Beam Angle

Wide beam angle (180°) - light reaches to every corner of room

Photo-biologically Safe Light

Eye comfort

Wattages

Cutout Dimensions (cm)

Product Dimensions (cm)

4W

NA

Ø3.5x10.4



APPLICATIONS

- Living Rooms
- Chandeliers
- Showrooms etc.

WHY PREFER PANASONIC LED LIGHTING PRODUCTS



RoHS COMPLIANCE

Panasonic has implemented ROHS (Restriction of Hazardous Substances like Lead, Mercury, Cadmium, Hexavalent chromium, Polybrominated biphenyls, Polybrominated diphenyl etc) across all LED products since June 2023, ensuring reduced environmental and health risks by limiting the use of hazardous substances in manufacturing, usage, and disposal.



EXTENDED LIFESPAN

Our LED components are designed to deliver more than 25,000 burning hours, providing customers with extended reliability and reduced maintenance costs.



BIS-COMPLIANT WIRING

All batters and fixtures adhere to BIS norms with 0.75 sq. mm input wires for indoor products and 1.00 sq. mm rubber-coated wires for outdoor products, preventing wire melting at high currents and reducing the risk of accidental short circuits.



THB TESTING

We conduct rigorous Temperature Humidity Bias (THB) reliability testing to assess the long-term durability of electronic components, ensuring exceptional product longevity.



ROBUST DESIGN

Panasonic LED products are engineered to withstand high voltage fluctuations and surge conditions, ensuring stable performance in diverse environments.



UV RESISTANCE

Our UV testing in outdoor products ensures that the plastic materials used in our LED products remain durable and do not deteriorate when exposed to sunlight.



PHOTOBIOLOGICAL SAFETY

The LEDs used in our lighting products are certified photobiologically safe, ensuring no harmful radiation exposure for human health.



THERMAL SHOCK TESTING

To enhance the reliability of our electronic components and solder joints, Panasonic performs thermal shock tests under Indian environmental conditions, ensuring a product lifespan greater than product warranty.



NABL-ACCREDITED LAB CERTIFICATION

Panasonic ensures compliance with the highest standards of quality, performance, safety, and reliability through rigorous testing in our in-house NABL-accredited lab



NO VOLATILE ORGANIC COMPOUNDS (VOCs):

We eliminate the use of harmful substances such as benzene, formaldehyde, and toluene, preventing potential health issues associated with LED lighting.

Watts	CCT	Product Code	Page No.
PANEL LIGHTS			
Rimless Surface Tri CCT Panel Light			7
6W	C+N+W	PPAM1606CNW	
12W	C+N+W	PPAM1612CNW	
18W	C+N+W	PPAM1618CNW	
24W	C+N+W	PPAM1624CNW	
Surface Radar Panle Light			8
9W	6500K	PPAM16097S	
Rimless Surface Panel Light			9
6W	3000K	PPAM16063R1	
6W	4000K	PPAM16064R1	
6W	6500K	PPAM16067R1	
12W	3000K	PPAM16123R1	
12W	4000K	PPAM16124R1	
12W	6500K	PPAM16127R1	
18W	3000K	PPAM16183R1	
18W	4000K	PPAM16184R1	
18W	6500K	PPAM16187R1	
24W	3000K	PPAM16243R1	
24W	4000K	PPAM16244R1	
24W	6500K	PPAM16247R1	
Matiz Colour Panel Light			10
(Multi Colour In 1 Light) - Circular			
6W	CW and Red	PPAM28067R	
6W	CW and Green	PPAM28067G	
6W	CW and Blue	PPAM28067B	
6W	CW and Pink	PPAM28067P	
6W	CW and RGB	PPAM28067RGB	
6W	CW and PGB	PPAM28067PGB	
(Multi Colour In 1 Light) - Square			
6W	CW and Red	PPAM29067R	
6W	CW and Green	PPAM29067G	
6W	CW and Blue	PPAM29067B	
6W	CW and Pink	PPAM29067P	
6W	CW and RGB	PPAM29067RGB	
6W	CW and PGB	PPAM29067PGB	
Panel Light - Circular			11
3W	3000K	PPAM22033	
3W	4000K	PPAM22034	
3W	6500K	PPAM22037	
6W	3000K	PPAM22063	
6W	4000K	PPAM22064	
6W	6500K	PPAM22067	

Watts	CCT	Product Code	Page No.
Panel Light - Circular			11
10W	3000K	PPAM22103	
10W	4000K	PPAM22104	
10W	6500K	PPAM22107	
15W	3000K	PPAM22153	
15W	4000K	PPAM22154	
15W	6500K	PPAM22157	
20W	3000K	PPAM22203	
20W	4000K	PPAM22204	
20W	6500K	PPAM22207	
PC Panel - Square			11
3W	3000K	PPAM23033	
3W	4000K	PPAM23034	
3W	6500K	PPAM23037	
6W	3000K	PPAM23063	
6W	4000K	PPAM23064	
6W	6500K	PPAM23067	
10W	3000K	PPAM23103	
10W	4000K	PPAM23104	
10W	6500K	PPAM23107	
15W	3000K	PPAM23153	
15W	4000K	PPAM23154	
15W	6500K	PPAM23157	
20W	3000K	PPAM23203	
20W	4000K	PPAM23204	
20W	6500K	PPAM23207	
Step Panel - Circular			12
3W	3000K	PPAM11033R2	
3W	4000K	PPAM11034R2	
3W	6500K	PPAM11037R2	
5W	3000K	PPAM11053R2	
5W	4000K	PPAM11054R2	
5W	6500K	PPAM11057R2	
10W	3000K	PPAM11103R2	
10W	4000K	PPAM11104R2	
10W	6500K	PPAM11107R2	
15W	3000K	PPAM11153R2	
15W	4000K	PPAM11154R2	
15W	6500K	PPAM11157R2	
20W	3000K	PPAM11203R2	
20W	4000K	PPAM11204R2	
20W	6500K	PPAM11207R2	

Watts	CCT	Product Code	Page No.
Step Panel - Circular			12
24W	3000K	PPAM11243R2	
24W	4000K	PPAM11244R2	
24W	6500K	PPAM11247R2	
Step Panel - Square			12
3W	3000K	PPAM21033R2	
3W	4000K	PPAM21034R2	
3W	6500K	PPAM21037R2	
5W	3000K	PPAM21053R2	
5W	4000K	PPAM21054R2	
5W	6500K	PPAM21057R2	
10W	3000K	PPAM21103R2	
10W	4000K	PPAM21104R2	
10W	6500K	PPAM21107R2	
15W	3000K	PPAM21153R2	
15W	4000K	PPAM21154R2	
15W	6500K	PPAM21157R2	
20W	3000K	PPAM21203R2	
20W	4000K	PPAM21204R2	
20W	6500K	PPAM21207R2	
24W	3000K	PPAM21243R2	
240W	4000K	PPAM21244R2	
240W	6500K	PPAM21247R2	
Base Light			13
36W	3000K	PBLM13363R2	
36W	4000K	PBLM13364R2	
36W	6500K	PBLM13367R2	
40W	3000K	PBLM13403R2	
40W	4000K	PBLM13404R2	
40W	6500K	PBLM13407R2	
Base Light 1x1			14
24W	3000K	PBLM13243R2	
24W	4000K	PBLM13244R2	
24W	6500K	PBLM13247R2	
DOWNLIGHTS			
Ferris Aluminium Swivel COB Downlights			16
3W	3000K	PDLM33033R1	
3W	4000K	PDLM33034R1	
3W	6500K	PDLM33037R1	
7W	3000K	PDLM33073R1	
7W	4000K	PDLM33074R1	
7W	6500K	PDLM33077R1	

Watts	CCT	Product Code	Page No.
Ferris Aluminium Swivel COB Downlights			16
12W	3000K	PDLM33123R1	
12W	4000K	PDLM33124R1	
12W	6500K	PDLM33127R1	
15W	3000K	PDLM33153R1	
15W	4000K	PDLM33154R1	
15W	6500K	PDLM33157R1	
18W	3000K	PDLM33183R1	
18W	4000K	PDLM33184R1	
18W	6500K	PDLM33187R1	
24W	3000K	PDLM33243R1	
24W	4000K	PDLM33244R1	
24W	6500K	PDLM33247R1	
Ferris Deep Recessed COB Downlights			17
7W Rose Gold	3000K	PDLM60073	
7W Gun Black	3000K	PDLM61073	
7W Rose Gold	4000K	PDLM60074	
7W Gun Black	4000K	PDLM61074	
12W Rose Gold	3000K	PDLM60123	
12W Gun Black	3000K	PDLM61123	
12W Rose Gold	4000K	PDLM60124	
12W Gun Black	4000K	PDLM61124	
18W Rose Gold	3000K	PDLM60183	
18W Gun Black	3000K	PDLM61183	
18W Rose Gold	4000K	PDLM60184	
18W Gun Black	4000K	PDLM61184	
Ferris Tiltable COB Downlights			18
12W Rose Gold	3000K	PSPM04123	
12W Gun Black	3000K	PDLM05123	
12W Rose Gold	4000K	PSPM04124	
12W Gun Black	4000K	PDLM05124	
12W Rose Gold	6500K	PSPM04127	
12W Gun Black	6500K	PDLM05127	
18W Rose Gold	3000K	PSPM04183	
18W Gun Black	3000K	PDLM05183	
18W Rose Gold	4000K	PSPM04184	
18W Gun Black	4000K	PDLM05184	
18W Rose Gold	6500K	PSPM04187	
18W Gun Black	6500K	PDLM05187	
Ferris Low Glare COB Downlights			19
7W Rose Gold	3000K	PDLM64073	
7W Black	3000K	PDLM65073	
7W Rose Gold	4000K	PDLM64074	
7W Black	4000K	PDLM65074	

Watts	CCT	Product Code	Page No.
Ferris Low Glare COB Downlights			19
12W Rose Gold	3000K	PDLM64123	
12W Black	3000K	PDLM65123	
12W Rose Gold	4000K	PDLM64124	
12W Black	4000K	PDLM65124	
18W Rose Gold	3000K	PDLM64183	
18W Black	3000K	PDLM65183	
18W Rose Gold	4000K	PDLM64184	
18W Black	4000K	PDLM65184	
Modular COB Linear Lights			20
10W	3000K	PLMM01103	
10W	4000K	PLMM01104	
10W	6500K	PLMM01107	
20W	3000K	PLMM01203	
20W	4000K	PLMM01204	
20W	4000K	PLMM01207	
Surface Striker Downlights			21
3W	3000K	PDLM28033R2	
3W	4000K	PDLM28034R2	
3W	6500K	PDLM28037R2	
Clip Type Deep Junction Box			22
3W	3000K	PDLM17033R2	
3W	4000K	PDLM17034R2	
3W	6500K	PDLM17037R2	
3W	Red	PDLM1703RR2	
3W	Green	PDLM1703GR2	
3W	Blue	PDLM1703BR2	
3W	Pink	PDLM1703PR2	
Deep Junction Downlights			23
8W	3000K	PDLM16083R1	
8W	6500K	PDLM16087R1	
8W	Blue	PDLM1608BR1	
8W	Green	PDLM1608GR1	
8W	Pink	PDLM1608PR1	
8W	Red	PDLM1608RR1	
12W	3000K	PDLM16123R1	
12W	6500K	PDLM16127R1	
12W	Blue	PDLM1612BR1	
12W	Green	PDLM1612GR1	
12W	Pink	PDLM1612PR1	
12W	Red	PDLM1612RR1	
15W	3000K	PDLM16153R1	
15W	6500K	PDLM16157R1	
15W	Blue	PDLM1615BR1	

Watts	CCT	Product Code	Page No.
Deep Junction Downlights			23
15W	Green	PDLM1615GR1	
15W	Pink	PDLM1615PR1	
15W	Red	PDLM1615RR1	
Tri CCT Deep Recessed COB Downlights			24
7W White	C+N+W	PDLM4207CNW	
7W Rose Gold	C+N+W	PDLM4307CNW	
7W Gun Black	C+N+W	PDLM4407CNW	
12W White	C+N+W	PDLM4212CNW	
12W Rose Gold	C+N+W	PDLM4312CNW	
12W Gun Black	C+N+W	PDLM4412CNW	
18W White	C+N+W	PDLM4218CNW	
18W Rose Gold	C+N+W	PDLM4318CNW	
18W Gun Black	C+N+W	PDLM4418CNW	
Tri CCT Modular Surface			25
9W	C+N+W	PDLM2209CNW	
15W	C+N+W	PDLM2215CNW	
Modular Surface			26
7W	3000K	PDLM22073	
7W	4000K	PDLM22074	
7W	6500K	PDLM22077	
9W	3000K	PDLM22093	
9W	4000K	PDLM22094	
9W	6500K	PDLM22097	
9W	Red	PDLM2209R	
9W	Green	PDLM2209G	
9W	Blue	PDLM2209B	
9W	Pink	PDLM2209P	
15W	3000K	PDLM22153	
15W	4000K	PDLM22154	
15W	6500K	PDLM22157	
20W	3000K	PDLM22203	
20W	4000K	PDLM22204	
20W	6500K	PDLM22207	
30W	3000K	PDLM22303	
30W	4000K	PDLM22304	
30W	6500K	PDLM22307	
Honeycomb Tri CCT Downlights			27
8W	NA	PDLM4908RGCNW	
8W	NA	PDLM4908SVRCNW	
12W	NA	PDLM4912RGCNW	
12W	NA	PDLM4912SVRCNW	
18W	NA	PDLM4918RGCNW	
18W	NA	PDLM4918SVRCNW	

Watts	CCT	Product Code	Page No.
Deep Recessed COB Downlights - White			28
7W	3000K	PDLM4207CNW	
7W	4000K	PDLM4207CNW	
7W	6500K	PDLM4207CNW	
12W	3000K	PDLM4212CNW	
12W	4000K	PDLM4212CNW	
12W	6500K	PDLM4212CNW	
18W	3000K	PDLM4218CNW	
18W	4000K	PDLM4218CNW	
18W	6500K	PDLM4218CNW	
Deep Recessed COB Downlights - Rose Gold			28
7W	3000K	PDLM4307CNW	
7W	4000K	PDLM4307CNW	
7W	6500K	PDLM4307CNW	
12W	3000K	PDLM4312CNW	
12W	4000K	PDLM4312CNW	
12W	6500K	PDLM4312CNW	
18W	3000K	PDLM4318CNW	
18W	4000K	PDLM4318CNW	
18W	6500K	PDLM4318CNW	
Deep Recessed COB Downlights - Gun Black			28
7W	3000K	PDLM4407CNW	
7W	4000K	PDLM4407CNW	
7W	6500K	PDLM4407CNW	
12W	3000K	PDLM4412CNW	
12W	4000K	PDLM4412CNW	
12W	6500K	PDLM4412CNW	
18W	3000K	PDLM4318CNW	
18W	4000K	PDLM4318CNW	
18W	6500K	PDLM4318CNW	
Deep Recessed COB Downlights - Yellow Gold			28
7W	3000K	PDLM4507CNW	
7W	4000K	PDLM4507CNW	
7W	6500K	PDLM4507CNW	
12W	3000K	PDLM4512CNW	
12W	4000K	PDLM4512CNW	
12W	6500K	PDLM4512CNW	
18W	3000K	PDLM4518CNW	
18W	4000K	PDLM4518CNW	
18W	6500K	PDLM4518CNW	

Watts	CCT	Product Code	Page No.
Deep Downlights			29
6W	3000K	PDLM47063	
6W	4000K	PDLM47064	
6W	6500K	PDLM47067	
12W	3000K	PDLM47123	
12W	4000K	PDLM47124	
12W	6500K	PDLM47127	
18W	3000K	PDLM47183	
18W	4000K	PDLM47184	
18W	6500K	PDLM47187	
24W	3000K	PDLM47243	
24W	4000K	PDLM47244	
24W	6500K	PDLM47247	
Conceal Downlight Junction Box			30
6W	3000K	PDLM34063	
6W	4000K	PDLM34064	
6W	6500K	PDLM34067	
6W	Red	PDLM3406R	
6W	Green	PDLM3406G	
6W	Blue	PDLM3406B	
6W	Pink	PDLM3406P	
8W	3000K	PDLM34083	
8W	4000K	PDLM34084	
8W	6500K	PDLM34087	
8W	Red	PDLM3408R	
8W	Green	PDLM3408G	
8W	Blue	PDLM3408B	
8W	Pink	PDLM3408P	
10W	3000K	PDLM34103	
10W	4000K	PDLM34104	
10W	6500K	PDLM34107	
10W	Red	PDLM3410R	
10W	Green	PDLM3410G	
10W	Blue	PDLM3410B	
10W	Pink	PDLM3410P	
Tri CCT & Tri Color Conceal Downlight			31
12W	C+N+W	PDLM1512CNW	
12W	R+B+V	PDLM1512RBV	

Watts	CCT	Product Code	Page No.
Swivel Downlights			32
3W	3000K	PDLM40033	
3W	4000K	PDLM40034	
3W	6500K	PDLM40037	
6W	3000K	PDLM40063	
6W	4000K	PDLM40064	
6W	6500K	PDLM40067	
9W	3000K	PDLM40093	
9W	4000K	PDLM40094	
9W	6500K	PDLM40097	
12W	3000K	PDLM40123	
12W	6500K	PDLM40127	
Aluminium Swivel COB Downlights			33
30W	3000K	PDLM33303R1	
30W	4000K	PDLM33304R1	
30W	6500K	PDLM33307R1	
50W	3000K	PDLM33503R1	
50W	4000K	PDLM33504R1	
50W	6500K	PDLM33507R1	
Swivel COB Deep Junction Box Downlights			34
3W	3000K	PDLM48033	
3W	4000K	PDLM48034	
3W	6500K	PDLM48037	
3W	Red	PDLM4803R	
3W	Green	PDLM4803G	
3W	Blue	PDLM4803B	
3W	Pink	PDLM4803P	
Deep Junction COB Downlights			35
3W	3000K	PDLM16083	
3W	4000K	PDLM16084	
3W	6500K	PDLM16087	
3W	Red	PDLM1608R	
3W	Green	PDLM1608G	
3W	Blue	PDLM1608B	
3W	Pink	PDLM1608P	
Junction Box Downlights			36
5W	3000K	PDLM41053R1	
5W	4000K	PDLM41054R1	
5W	6500K	PDLM41057R1	
10W	3000K	PDLM41103	
10W	4000K	PDLM41104	
10W	6500K	PDLM41107	

Watts	CCT	Product Code	Page No.
Junction Box Downlights			36
15W	3000K	PDLM41153R1	
15W	4000K	PDLM41154R1	
15W	6500K	PDLM41157R1	
Cylindrical Suspended COB Downlights			37
RG Reflector			
12W	3000K	PDHM01123	
12W	4000K	PDHM01124	
12W	6500K	PDHM01127	
18W	3000K	PDHM01183	
18W	4000K	PDHM01184	
18W	6500K	PDHM01187	
Silver Reflector			
12W	3000K	PDHM02123	
12W	4000K	PDHM02124	
12W	6500K	PDHM02127	
18W	3000K	PDHM02183	
18W	4000K	PDHM02184	
18W	6500K	PDHM02187	
Cylindrical Surface COB Downlights			38
RG Reflector			
12W	3000K	PDSM01123	
12W	4000K	PDSM01124	
12W	6500K	PDSM01127	
18W	3000K	PDSM01183	
18W	4000K	PDSM01184	
18W	6500K	PDSM01187	
Silver Reflector			
12W	3000K	PDSM02123	
12W	4000K	PDSM02124	
12W	6500K	PDSM02127	
18W	3000K	PDSM02183	
18W	4000K	PDSM02184	
18W	6500K	PDSM02187	
Modular COB Downlights			39
7W	3000K	PDLM51073	
7W	4000K	PDLM51074	
7W	6500K	PDLM51077	
12W	3000K	PDLM51123	
12W	4000K	PDLM51124	
12W	6500K	PDLM51127	
18W	3000K	PDLM51183	
18W	4000K	PDLM51184	
18W	6500K	PDLM51187	

Watts	CCT	Product Code	Page No.
Tri CCT Downlights			40
5W	CW+NW+WW	PDLM0205CNW	
10W	CW+NW+WW	PDLM0210CNW	
15W	CW+NW+WW	PDLM0215CNW	
20W	CW+NW+WW	PDLM0220CNW	
PDL Hybrid AnoraSlim Plus - Circular			41
3W	3000K	PDLM01033R4	
3W	4000K	PDLM01034R4	
3W	6500K	PDLM01037R4	
6W	3000K	PDLM01063R4	
6W	4000K	PDLM01064R4	
6W	6500K	PDLM01067R4	
10W	3000K	PDLM01103R4	
10W	4000K	PDLM01104R4	
10W	6500K	PDLM01107R4	
12W	3000K	PDLM01123R4	
12W	4000K	PDLM01124R4	
12W	6500K	PDLM01127R4	
15W	3000K	PDLM01153R4	
15W	4000K	PDLM01154R4	
15W	6500K	PDLM01157R4	
15W	3000K	PDLM01153R4S	
15W	4000K	PDLM01154R4S	
15W	6500K	PDLM01157R4S	
20W	3000K	PDLM01203R4	
20W	4000K	PDLM01204R4	
20W	6500K	PDLM01207R4	
PDL Hybrid AnoraSlim Plus - Square			41
3W	3000K	PDLM02033R4	
3W	4000K	PDLM02034R4	
3W	6500K	PDLM02037R4	
5W	3000K	PDLM02063R4	
5W	4000K	PDLM02064R4	
5W	6500K	PDLM02067R4	
10W	3000K	PDLM02103R4	
10W	4000K	PDLM02104R4	
10W	6500K	PDLM02107R4	
12W	3000K	PDLM02123R4	
12W	4000K	PDLM02124R4	
12W	6500K	PDLM02127R4	
15W	3000K	PDLM02153R4	
15W	4000K	PDLM02154R4	
15W	6500K	PDLM02157R4	

Watts	CCT	Product Code	Page No.
PDL Hybrid AnoraSlim Plus - Square			41
15W	3000K	PDLM02153R4S	
15W	4000K	PDLM02154R4S	
15W	6500K	PDLM02157R4S	
20W	3000K	PDLM02203R4	
20W	4000K	PDLM02204R4	
20W	6500K	PDLM02207R4	
PDL Hybrid Tri-CCT Anoraslim			42
5W	C+N+W	PDLM0105CNWR3	
10W	C+N+W	PDLM0110CNWR3	
12W	C+N+W	PDLM0112CNWR3	
15W	C+N+W	PDLM0115CNWR3	
20W	C+N+W	PDLM0120CNWR3	
Downlights - Circular			43
5W	3000K	PDLM01053R2	
5W	4000K	PDLM01054R2	
5W	6500K	PDLM01057R2	
10W	3000K	PDLM01103R2	
10W	4000K	PDLM01104R2	
10W	6500K	PDLM01107R2	
15W	3000K	PDLM01153R2	
15W	4000K	PDLM01154R2	
15W	6500K	PDLM01157R2	
20W	3000K	PDLM01203R2	
20W	4000K	PDLM01204R2	
20W	6500K	PDLM01207R2	
Downlights - Square			43
5W	3000K	PDLM02053R2	
5W	4000K	PDLM02054R2	
5W	6500K	PDLM02057R2	
10W	3000K	PDLM02103R2	
10W	4000K	PDLM02104R2	
10W	6500K	PDLM02107R2	
15W	3000K	PDLM02153R2	
15W	4000K	PDLM02154R2	
15W	6500K	PDLM02157R2	
20W	3000K	PDLM02203R2	
20W	4000K	PDLM02204R2	
20W	6500K	PDLM02207R2	
Dual Colour Junction Box Downlights			44
7W	CW+WW	PDLM17077WW	
7W	CW+Blue	PDLM17077BU	
12W	CW+WW	PDLM17127WW	
12W	CW+Blue	PDLM17127BU	

Watts	CCT	Product Code	Page No.
Dual Colour Junction Box Downlights			44
12W	CW+Pink	PDLM17127PN	
12W	CW+Red	PDLM17127RD	
12W	CW+Green	PDLM17127GN	
Mini Surface Downlights 5W			45
5W	3000K	PDLM28053	
5W	6500K	PDLM28057	
5W	Red	PDLM2805R	
5W	Green	PDLM2805G	
5W	Blue	PDLM2805B	
5W	Pink	PDLM2805P	
Mini Surface Downlights 3W			46
3W	3000K	PDLM28033R1	
3W	6500K	PDLM28037R1	
3W	Red	PDLM2803RR1	
3W	Green	PDLM2803GR1	
3W	Blue	PDLM2803BR1	
3W	Pink	PDLM2803PR1	
SPOT LIGHTS			
Surface Spot Light			48
3W	3000	PSPM02033	
3W	4000	PSPM02034	
3W	6500	PSPM02037	
6W	3000	PSPM02063	
6W	4000	PSPM02064	
6W	6500	PSPM02067	
Surface Spot Light			49
10W	3000	PSPM02103	
10W	4000	PSPM02104	
10W	6500	PSPM02107	
15W	3000	PSPM02153	
15W	4000	PSPM02154	
15W	6500	PSPM02157	
20W	3000	PSPM02203	
20W	4000	PSPM02204	
20W	6500	PSPM02207	
Track Spot Light			50
12W	3000	PSPM03123R1	
12W	4000	PSPM03124R1	
12W	6500	PSPM03127R1	

Watts	CCT	Product Code	Page No.
Track Spot Light			50
18W	3000	PSPM03183R1	
18W	4000	PSPM03184R1	
18W	6500	PSPM03187R1	
30W	3000	PSPM03303R1	
30W	4000	PSPM03304R1	
30W	6500	PSPM03307R1	
Spot Light			51
2W	2700	ASP020022	
2W	6000	ASP020026	
2W	3000	PSPM01023R1	
2W	6500	PSPM01027R1	
2W	Red	PSPM0102RR1	
2W	Green	PSPM0102GR1	
2W	Blue	PSPM0102BR1	
2W	Pink	PSPM0102PR1	
OUTDOOR LIGHTS			
Aluminium Flood Lights			53
30W	3000K	PFLM33303	
30W	6500K	PFLM33307	
50W	3000K	PFLM33503	
50W	6500K	PFLM33507	
100W	3000K	PFLM33AB3	
100W	6500K	PFLM33AB7	
Aluminium Flood Lights			54
150W	3000K	PFLM33FG3	
150W	6500K	PFLM33FG7	
200W	3000K	PFLM33MN3	
200W	6500K	PFLM33MN7	
Flood Lights (20-200W)			55
20W	3000K	PFLM24203	
20W	6500K	PFLM24207	
30W	3000K	PFLM24303	
30W	6500K	PFLM24307	
50W	3000K	PFLM24503	
50W	6500K	PFLM24507	
100W	3000K	PFLM24AB3	
100W	6500K	PFLM24AB7	
150W	3000K	PFLM24FG3	
150W	6500K	PFLM24FG7	
200W	3000K	PFLM24MN3	
200W	6500K	PFLM24MN7	

Watts	CCT	Product Code	Page No.
Aluminium Street Lights			56
15W	3000K	PSTM30153	
15W	6500K	PSTM30157	
25W	3000K	PSTM30253	
25W	6500K	PSTM30257	
45W	3000K	PSTM30453	
45W	6500K	PSTM30457	
60W	3000K	PSTM30603	
60W	6500K	PSTM30607	
75W	3000K	PSTM30753	
75W	6500K	PSTM30757	
Aluminium Street Lights			57
100W	3000K	PSTM30AB3	
100W	6500K	PSTM30AB7	
Street Lights			58
20W	6500K	PSTM31207	
30W	6500K	PSTM31307	
50W	6500K	PSTM31507	
Aluminium Sensor Street Lights			59
45W	3000K	PSTM30453S	
45W	6500K	PSTM30457S	
PC Sensor Street Lights			60
50W	6500K	PSTM31507S	
Step Lights			61
3W	3000K	PSEM03033	
3W	6500K	PSEM03037	
6W	6500K	PSEM03063	
6W	6500K	PSEM03067	
Bulk Heads			62
10W	3000K	PBHM03103	
10W	4000K	PBHM03104	
10W	6500K	PBHM03107	
12W	6500K	PBHM02123	
12W	6500K	PBHM02127	
20W	3000K	PBHM03203	
20W	4000K	PBHM03204	
20W	6500K	PBHM03207	

Watts	CCT	Product Code	Page No.
WALL LIGHTS			
Up Down Light (K-Type)			64
3W	3000K	PUDM01063	
3W	4000K	PUDM01064	
3W	6500K	PUDM01067	
6W	3000K	PUDM01123	
6W	3000K	PUDM01124	
6W	3000K	PUDM01127	
Up Down Light (K-Type)			65
6W	3000K	PUDM01063	
6W	4000K	PUDM01064	
6W	6500K	PUDM01067	
12W	3000K	PUDM01123	
12W	3000K	PUDM01124	
12W	3000K	PUDM01127	
Dyna Up Down Wall Light 6W, 12W			66
6W	3000K	PUDM02063	
6W	4000K	PUDM02064	
6W	6500K	PUDM02067	
12W	3000K	PUDM02123	
12W	3000K	PUDM02124	
12W	3000K	PUDM02127	
Dyna Elevation Wall Light 4 Way			67
4Way	3000K	PELM01043	
4Way	6500K	PELM01047	
Dyna Elevation Wall Lights			68
2W - 2Way	3000K	PELM02023	
2W - 2Way	6000K	PELM02027	
4W - 2Way	3000K	PELM02043	
4W - 2Way	6000K	PELM02047	
Dyna Up Down Wall Lights (2W-10W)			69
1x2	3000K	PUDM02023R1	
2W	6500K	PUDM02027R1	
2x2	3000K	PUDM02043R1	
4W	6500K	PUDM02047R1	
3x2	3000K	PUDM02043R1	
6W	6500K	PUDM02047R1	
4x2	3000K	PUDM03083	
8W	6500K	PUDM03087	
5x2	3000K	PUDM03103	
10W	6500K	PUDM03103	

Watts	CCT	Product Code	Page No.
Dyna Wall Lights (Oblong, Round, Square)			70
15W-Square	3000K	PWLM01153	
15W-Square	4000K	PWLM01154	
15W-Square	6500K	PWLM01157	
15W-Round	3000K	PWLM02153	
15W-Round	4000K	PWLM02154	
15W-Round	6500K	PWLM02157	
15W-Oblong	3000K	PWLM03153	
15W-Oblong	4000K	PWLM03154	
15W-Oblong	6500K	PWLM03157	
Mirror Light			71
10W White	3000K	PMLM01103	
10W White	4000K	PMLM01104	
10W White	6500K	PMLM01107	
10W Silver	3000K	PMLM02103	
10W Silver	4000K	PMLM02104	
10W Silver	6500K	PMLM02107	
DECORATIVE LIGHTS			
Rope Light - 60 LED/Mtr			73
6W/60 LED	3000K	PSLM12TU3	
6W/60 LED	4000K	PSLM12TU4	
6W/60 LED	6500K	PSLM12TU7	
6W/60 LED	Red	PSLM12TUR	
6W/60 LED	Green	PSLM12TUG	
6W/60 LED	Blue	PSLM12TUB	
6W/60 LED	Pink	PSLM12TUP	
6W/60 LED	Amber	PSLM12TUA	
Rope Light - 120 LED/Mtr			74
8W/120 LED	3000K	PSLM12GH3	
8W/120 LED	4000K	PSLM12GH4	
8W/120 LED	6500K	PSLM12GH7	
8W/120 LED	Red	PSLM12GHR	
8W/120 LED	Green	PSLM12GHG	
8W/120 LED	Blue	PSLM12GHB	
8W/120 LED	Amber	PSLM12GHA	
8W/120 LED	Pink	PSLM12GHP	
Tri Color RGB Rope Light - 18Mtr			75
120 LED/18m	Tri Colour	PSLM12ZDTC	
RGB Rope Light 60LED/m, 20m			76
60 LED/mtr, 20mtr	RGB	PSLM12TURGB	

Watts	CCT	Product Code	Page No.
RGB Strip Light - 5 Mtr			77
60 LED/Mtr	RGB with Remote	PSLM06500	
Strip Light 24W/36W/60W - 5 Mtr			78
25W	3000K	PSLM06253	
25W	4000K	PSLM06254	
25W	6500K	PSLM06257	
25W	Red	PSLM0625R	
25W	Green	PSLM0625G	
25W	Blue	PSLM0625B	
25W	Pink	PSLM0625P	
36W	3000K	PSLM08363	
36W	4000K	PSLM08364	
36W	6500K	PSLM08367	
36W	Red	PSLM0836R	
36W	Green	PSLM0836G	
36W	Blue	PSLM0836B	
36W	Amber	PSLM0836A	
36W	Pink	PSLM0836P	
60W	3000K	PSLM09603	
60W	4000K	PSLM09604	
60W	6500K	PSLM09607	
60W	Red	PSLM0960R	
60W	Green	PSLM0960G	
60W	Blue	PSLM0960B	
60W	Amber	PSLM0960A	
60W	Pink	PSLM0960P	
Decofancy String Light			79
46 LED/10m	Red	PLLM0103R	
46 LED/10m	Green	PLLM0103G	
46 LED/10m	Blue	PLLM0103B	
46 LED/10m	Pink	PLLM0103P	
46 LED/10m	Yellow	PLLM0103Y	
46 LED/10m	White	PLLM0103W	
46 LED/10m	Multi Colour	PLLM0103MC	
46 LED/10m	Warm White	PLLM0103WW	
Strip Drivers			80
12V - 3 Amp	NA	PSL0S0836R1	
12V - 5 Amp	NA	PSL0S0960R1	
12V - 10 Amp	NA	PSL0S1010A	
12V - 14 Amp	NA	PSL0S1014A	

Watts	CCT	Product Code	Page No.
BATTENS			
THEA LED Hyper			82
70W	6500K	PBTM28707	
100W	6500K	PBTM28AB7	
THEA LED Pro			83
50W	3000K	PBTM27503	
50W	4000K	PBTM27504	
50W	6500K	PBTM27507	
THEALED Batten 24W			84
24W	3000K	PBTM24243R1	
24W	4000K	PBTM24244R1	
24W	6500K	PBTM24247R1	
THEALED AC Batten (1 ft)			85
10W	3000K	PBTM24103L1	
10W	4000K	PBTM24104L1	
10W	6500K	PBTM24107L1	
THEALED Aluminium Batten			86
40W	3000K	PBTM08403R1	
40W	4000K	PBTM08404R1	
40W	6500K	PBTM08407R1	
THEALED Batten 36W			87
36W	3000K	PBTM24363	
36W	6500K	PBTM24367	
THEALED ACE Batten 22W			88
22W	3000K	PBTM24223R2	
22W	3000K	PBTM24224R2	
22W	6500K	PBTM24227R2	
THEALED Ace Batten 20W			89
20W	3000K	PBTM24203R2	
20W	4000K	PBTM24204R2	
20W	6500K	PBTM24207R2	
THEALED Ace Rainbow 20W			90
20W	3000K	PBTM24203R1	
20W	4000K	PBTM24204R1	
20W	6500K	PBTM24207R1	
20W	Red	PBTM2420RR1	
20W	Green	PBTM2420GR1	
20W	Blue	PBTM2420BR1	
20W	Pink	PBTM2420PR1	

Watts	CCT	Product Code	Page No.
THEALED Ace Batten 5W-10W			91
5W	3000K	PBTM24053R1	
5W	4000K	PBTM24054R1	
5W	6500K	PBTM24057R1	
10W	3000K	PBTM24103R1	
10W	4000K	PBTM24104R1	
10W	6500K	PBTM24107R1	
ALTABRIGHT ANORA Batten 2ft 20W			92
20W	3000K	PBTM23203	
20W	6500K	PBTM23207	
BULBS			
Dura Hyper LED Bulb 70W			94
70W B22	6500K	PBUM36707	
Dura Hyper LED Bulb 30W-50W			95
30W B22	3000K	PBUM36303	
30W B22	6500K	PBUM36307	
40W B22	3000K	PBUM36403	
40W B22	6500K	PBUM36407	
50W B22	3000K	PBUM36503	
50W B22	6500K	PBUM36507	
Dura Max LED Bulb			96
15W B22	3000K	PBUM36153	
15W B22	6500K	PBUM36157R1	
18W B22	3000K	PBUM36183	
18W B22	6500K	PBUM36187R1	
23W B22	3000K	PBUM36233	
23W B22	6500K	PBUM36237R1	
15W E27	3000K	PBUM42153	
15W E27	6500K	PBUM36427R1	
18W E27	3000K	PBUM42183	
18W E27	6500K	PBUM42187R1	
23W E27	3000K	PBUM42233	
23W E27	6500K	PBUM42237R1	
Dura Saver LED Bulb			97
3W B22	3000K	PBUM36033	
3W B22	6500K	PBUM36037	
5W B22	3000K	PBUM36053	
5W B22	6500K	PBUM36057	
3W E27	3000K	PBUM42033	
3W E27	6500K	PBUM42037	
5W E27	3000K	PBUM42053	
5W E27	6500K	PBUM42057	

Watts	CCT	Product Code	Page No.
Dura Saver LED Bulb			98
7W B22	3000K	PBUM36073	
7W B22	6500K	PBUM36077	
9W B22	3000K	PBUM36093	
9W B22	6500K	PBUM36097	
12W B22	3000K	PBUM36123	
12W B22	6500K	PBUM36127R1	
7W E27	3000K	PBUM42073	
7W E27	6500K	PBUM42077	
9W E27	3000K	PBUM42093	
9W E27	6500K	PBUM42097	
12W E27	3000K	PBUM42123	
12W E27	6500K	PBUM42127R1	
Emergency Bulb			99
9W	6500K	PBUM48097	
12W	6500K	PBUM48127	
Radar Bulb			100
9W	6500K	PBUM28097R2	
12W	6500K	PBUM28127R2	
Duro Nova Rainbow Colour Bulb			101
7W	Red	PBUM3607R	
7W	Green	PBUM3607G	
7W	Blue	PBUM3607B	
7W	Yellow	PBUM3607Y	
7W	Pink	PBUM3607P	
RGB Auto colour Bulb			102
0.5W	RGB	PBUM16010	
Candle Bulb - Lens Type			103
4W (B22)	3000K	PBUM44043B22	
4W (B22)	6500K	PBUM44047B22	
4W (E14)	3000K	PBUM44043E14	
4W (E14)	6500K	PBUM44047E14	
4W (E27)	3000K	PBUM44043E27	
4W (E27)	6500K	PBUM44047E27	
Candle Bulb			104
4W (B22)	3000K	PBUM43043B22	
4W (B22)	6500K	PBUM43047B22	
4W (E14)	3000K	PBUM43043E14	
4W (E14)	6500K	PBUM43047E14	
4W (E27)	3000K	PBUM43043E27	
4W (E27)	6500K	PBUM43047E27	



NOTES

NOTES

Jab khil uthega ghar
sahi roshni se
**Toh dikhega sab
ek nayi roshni mein**

Panasonic Life Solutions India Pvt. Ltd.

3rd Floor, B Wing, I-Think Techno Campus,
Pokharan Road No. 2, Thane (W), Thane - 400 607, Maharashtra.
Customer Care no. : 022-41304130
Email: wecare@in.panasonic.com
www.lsin.panasonic.com

Panasonic

All Rights Reserved © 2015 COPYRIGHT Panasonic Life Solutions India Pvt. Ltd.
Specifications are subject to change without notice
Printed in India

The duplication and transfer of images from this catalogue without permission is strictly prohibited.