



A Class of it's own...



LED Lighting

Complete Solution for

LED LIGHTING

— LIGHT YOUR MOMENT —

PRICE LIST
2026



www.teknolite.in

Indoor Outdoor Architectural And Commercial **Lighting Range...**



A Class of it's own...



LED Lighting

TEKNOLITE Led Panel Lights with CCT change and dimming option are made with state of art technology. CCT and dimming can be changed by remote. Also CCT can be changed by switch.

TEKNOLITE Smart lighting are highly energy saving and based on mood lighting concept. As per mood and requirement ambience can be changed. Groups of lighting load can be made on remote as per requirements. These Smart lighting are available in Panel lights, SMD down lights, COB lights, Linear lights & Hanging lights.

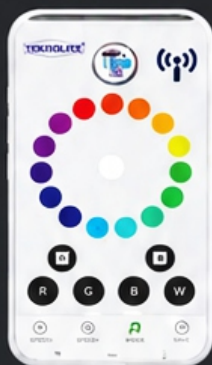

ON-OFF
CONTROL



Dimming Range : 15% - 100%, No need dimmer

BEAM ANGLES

5°



15°



24°



36°




45°



60°




WARM



2000K

2700K

NEUTRAL



3500K

4000K

COOL



5000K

6000K

6500K

COLD



8000K

DISCOVER THE PERFECT LIGHT TEMPERATURE
WITH TEKNOLITE

On order flicker-free driver available

TEKNOLITE

PHILIPS


OSRAM

FULHANI
Harness the power of light

LTE

LTECH

LiFUD



230V
AC



High
CRI



Dimmable



2000K

8000K



tunable
WHITE



WiFi

tuya



2.4G



Smart Life

PRODUCT / SECTION NAME	PAGE	PRODUCT / SECTION NAME	PAGE
• TN-REMOTE, DRIVER, TUNEABLE DRIVER, PHASE CUT DIMMER, SENSORS	1	• DRIVERS, CHANNELS, CABLE BOX, CONNECTERS	55
• RDL-15, RDL-10, ZB, ZD, RCB, JY, NM-DOB, VIVA	2	• MAGNETIC FLOOD LIGHT, MAGNETIC GRILL LIGHT	56
• JV SERIES, JX SERIES — HEAVY ALUMINIUM BODY	3	• MAGNETIC FOLDING GRILL LIGHT, MAGNETIC SPOTLIGHT	57
• JV, JX, OLEE, VISCA, ARYA	4	• 25MM MAGNETIC TRACK RAIL — RECESSED & SURFACE / PENDANT MOUNTED	60
• JR, VLP, DV-(L) LIGHT ALUMINIUM, TK-MR16, RC	5	• 25MM MAGNETIC TRACK RAIL PROFILE	61
• TJ, FLIX, FLIX TWIN, VISION, VISION TWIN, TRUM, TRUM TWIN	6	• MAGNETIC LINEAR RZR MOVABLE SPOTLIGHTS	62
• ES-127, ZM, RF, PRISM — HEAVY ALUMINIUM DIE CASTING	7	• MAGNETIC PENDANT LIGHTS, MAGNETIC L-CORNER	63
• EXCLUSIVE SPOTLIGHT SERIES — MV, MV-SF	8	• MAGNETIC TRACK JOINERS & ACCESSORIES	64
• MV, MV-SF, JCB, TS, TEERA	9	• MAGNETIC TRACK DRIVERS	65
• ES, CRISP PINHOLE, NOX POLO PINHOLE, ARENA, AMET, VANS IP54	10	• LED STRIP LIGHTS	66
• BRIVE COB — PREMIUM LED DOWNLIGHT	11	• HIGH CRI LED STRIP, RGB STRIP, COB DOTLESS STRIP	67
• BRIVE, TZF, RANZO, RIO, LUCENTIS, BRONZE, BRONZE TRIMLESS	12	• STDH HIGH BAY, FD GL FLOOD LIGHT, SL GL STREET LIGHT, SL SOLAR, UFO HB	68
• GALAXY, GALAXY IP65, MLE, TEEZA, TISCA	14	• WL DECORATIVE WALL LIGHTS	70
• ZENO, SHYNE COB, RETRO	16	• WL WALL LIGHTS (CONTINUED) & PML10CC	71
• SPLASH IP65, COMPACT, RL-H TRIMLESS, RL, CB IP54, LEESO	17	• OUTDOOR IP65 WATERPROOF WALL LIGHTS	72
• PREMIUM URANUS COB — GLAMOUR MIRROR LIGHT	18	• LED GATE LIGHTS — ROYAL, LOBINI, ZEN, FOTON, ORA, ALPINA, ACURA, KEERA, MOON	73
• URANUS, ELIUX DOWNLIGHT, TIMA, OLIVE, ESTRO, PENCIL	19	• ODL OUTDOOR WALL LIGHTS	74
• ANOX, ANOX-TRIMLESS, ASTERO, ASTERO TRIMLESS, ASTERO PINHOLE, ASTERO ULTRA SLIM TRIMLESS	20	• ODL OUTDOOR WALL LIGHTS	75
• OZONE PREMIUM COB	21	• ODL OUTDOOR WALL LIGHTS	76
• OZONE FIX, OZONE MOVABLE, OZONE TRIMLESS, PLUTO ULTRA SLIM COB, STELLAR PINHOLE	22	• ODL 445 LENS, ODL 407/408, OFL, FL-SENSOR, OCL	80
• CLUB SERIES — CLUB TALL, CLUB TALL TRIMLESS, CLUB TALL SQUARE & DOUBLE VARIANTS	24	• OFL (CONTINUED), ODL0402, ODL0602	81
• GLANZA SERIES	26	• POLY-CARBONATE — FLORA, OPAL2, ARIES, LIME, FLOAT, ODL570, ODL560	82
• CURVE SERIES	27	• GEO4, OPAL4, FSD, FSD-SQ, ASK ARCHITECTURAL SPIKE LIGHTS	83
• FLARE SERIES	28	• BOLARD, GATE LIGHT, SPIKE LIGHT — SOLAR RANGE	85
• RZR-PINHOLE, RZR TILTABLE, LINEA-SLEEK, RZR, ELY, ASTRA	30	• SOLAR LIGHTS	86
• CUBIX-TRIMLESS, DOUBLE & TRIPLE GIMBAL, ES, STROKE, HELIX-SF	31	• BLL OUTDOOR LIGHTS	87
• LUME, LAVIA, BB, BB-S, FN, FN FRAME — SURFACE SPOTLIGHTS	33	• NEON FLEX STRIP LIGHTING	88
• STELLA SERIES — LANIX REF, LANIX FOCUS, LANIX SPOT, ORIX REF, ORIX FOCUS, ORIX SP...	35	• SILICON FLEX PROFILE SERIES	89
• TRACK ADJUSTABLE SPOTLIGHTS	36	• SILICON FLEX PROFILE SERIES	90
• TRACK COB	37	• RECESSED / SURFACE PROFILE — TPF SERIES	91
• 2-WIRE HEAVY ALUMINIUM TRACK CHANNEL & CONCEALED CHANNEL	38	• RECESSED / SURFACE PROFILE (CONTINUED)	92
• TELESCOPE	39	• TREE HUG MODULAR LIGHTS — CUSTOMIZABLE PRICING	94
• CANVA SURFACE, SFC, PDL, SFR, SJ — SURFACE CYLINDER LIGHTS	40	• PIXEL BAR LIGHT TL406 — LINEAR / MEDIA FACADE	95
• NEXUS PREMIUM SURFACE, LUNA PREMIUM IP65, NEXUS SURFACE PINHOLE, BTSFC, BTZ	41	• WALL WASHER SF-24V, WALL WASHER SF-220V, LINEAR INGROUND	96
• MOON — PREMIUM SURFACE DOWNLIGHT	42	• ROUND FLOOD LIGHTS — TK-RD-FSD SERIES	97
• MOON, RDD PRO, CRYSTO DOWNLIGHT, RLD, JDD	43		
• LB, LZF, LZF-AS-SURFACE, LZF-AS-CC, PZF — PANEL LIGHTS	44		
• LZF-AS, PZF-SF, LZR, PZR, LB 2*2	45		
• LB BACKLIGHT, PZF SENSOR, TPF, HANGING WIRE, PSF, BTT	46		
• MAGNETIC TRACK LIGHTING 5MM, 11MM & 25MM — OVERVIEW	47		
• 5MM MAGNETIC TRACK — PROFILE LIGHT TILTABLE, LINEA LIGHT TILTABLE	48		
• 5MM MAGNETIC TRACK FOLDING PROFILE SMD LINEAR, FOLDING LINEA LIGHT	49		
• TRACK LIGHT, DUAL TRACK LIGHT	50		
• TERNARY LIGHT, TRACK LINEA LIGHT	51		
• ADJUSTABLE SF CYLINDER, TRACK LINEA LIGHT	52		
• SMD PENDENT SOFT LIGHT, HOSE LIGHT	53		
• SMD PENDENT EARTH LAMP, SMD PROFILE LIGHT	54		

NOTE: COMPANY CAN CHANGE DIMENSIONS, SPECIFICATIONS, & PRODUCT'S DESIGN WITHOUT ANY PRIOR NOTICE.

No-return policy on premium products

Delivery time : 3-15 days



RM4 REMOTE

DIMMABLE & TUNABLE REMOTE

Model	Body Colour	Group	Step	Tuning	Dimension (mm)	DLP
RM4	WB	4	WW-CW-NW-SLEEP	2700K to 6500K	130X48X20	850



REMOTE DIMMER (Smart wireless button scene switch)



Single Press



Double Press



Long Press

DLP

790

NO WARRANTY*

TEKNOLITE TUYA TUNNABLE & DIMMABLE DRIVER + LED



WATTAGE	8W	12W	15W	20W
DLP	1335	1335	1335	1890


(AS PER ORDER)

CCT 3 IN 1 SWITCH OPERATE (SWITCH & BLUETOOTH)

WATTAGE	8W	12W	20W	30W
DLP	220	290	480	700

(AS PER ORDER)

TEKNOLITE DRIVER



WATTAGE	3-6W	8-12W	15-20W	24-30W	40-50W
DLP	130	220	324	362	674

LED POWER SUPPLY



Voltage Watt Amp.

12V	36W	3 AMP
12V	60W	5 AMP
12V	100W	8.3 AMP
12V	150W	12.5 AMP
12V	200W	16.7 AMP
12V	250W	20.8 AMP
12V	300W	25 AMP
12V	400W	33.3 AMP

(50 piece box packing)
(50 piece box packing)
(50 piece box packing)
(50 piece box packing)
(25 piece box packing)
(25 piece box packing)
(25 piece box packing)
(25 piece box packing)

Voltage Watt Amp.

24V	36W	1.5 AMP
24V	60W	2.5 AMP
24V	100W	4.2 AMP
24V	150W	6.3 AMP
24V	200W	8.3 AMP
24V	250W	10.4 AMP
24V	300W	12.5 AMP
24V	400W	16.7 AMP

(50 piece box packing)
(50 piece box packing)
(50 piece box packing)
(50 piece box packing)
(25 piece box packing)
(25 piece box packing)
(25 piece box packing)
(25 piece box packing)

13MM ULTRA THIN SMPS



Model	Volt	DLP
SP-3.1	24VDC	1650
SP-4.16	24VDC	1500
SP-6.25	24VDC	1500

SENSORS



Conceal Sensor
Max.300W
Cutting Size:
55 x 55mm
DLP - 1770



Surface Sensor
Max.300W
Cutting Size:
88 x 55mm
DLP- 1860



Flat Surface Sensor
Max.1000W
Cutting Size:
86.4 x 60.4 x 98mm
DLP - 1610



Wardrobe Sensor
Max..60W
DLP - 800



Microwave
Sensors



PIR
Sensors



True Presence
Sensors



Wardrobe
Sensors



Day Night



Proximity
Sensors



RDL -15

Power By : **EDISON** LED TEKNOLITE DRIVER

WITHOUT DRIVER
DRIVER CHARGES EXTRA*

Model	Watt-DC	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
RDL-15	1W	130	WB-BB-RG	65	Ø17x22	Ø15	400



RDL -10

Power By : **EDISON** LED TEKNOLITE DRIVER

WITHOUT DRIVER
DRIVER CHARGES EXTRA*

Model	Watt-DC	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
RDL-10	1W	130	WB-BB	65	Ø17x22	Ø15	350



ZB

Power By : **EPISTAR** LED TEKNOLITE DRIVER

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
ZB-3-RD	3W	390	WB	25	Ø40X30	Ø28	300



ZD-DOB

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
ZD-RD-3	3W	390	WB	25	Ø40X30	Ø28	150



RCB

Power By : **EPISTAR** LED

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
RCB-3	3W	390	WB	25	Ø41X35	Ø32	550
RCB-5	5W	650	WB	25	Ø45X38	Ø32	620



JY

Power By : **EPISTAR** LED TEKNOLITE DRIVER

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	DLP
JY-3	3W	390	WB-BB	25	Ø41X35	400
JY-3	3W	390	COPPER	25	Ø15X60X60	430



MB-DOB

Power By : **EPISTAR** LED TEKNOLITE DRIVER

MODEL	WATT	LUMENS	Body Colour	Beam Angle	Dimension (mm)	CUTOUT	DLP
Mb-3	3W	390	WB	25	Ø86X75	Ø50	250
Mb-3 (RGB)	3W	390	WB	25	Ø86X75	Ø50	350



VIVA-DOB

Power By : **EPISTAR** LED TEKNOLITE DRIVER

Model	Watt	Lumens	Body Colour	BEAM ANGLE	Dimension (mm)	Cutout	DLP
VIVA-7	7W	910	WB-NB	36	Ø85X72	Ø72	320
VIVA -10	10W	1300	WB-NB	36	—	—	530

HEAVY ALUMINIUM BODY

Power By : **Bridgelux**

LED **Teknolite Driver**

BUILT TO LAST. DESIGNED TO SHINE.



DURABLE
ALUMINIUM
BODY



ENERGY
EFFICIENT
LED

JV SERIES

Power Options

4W	8W	12W	15W	20W	24W	30W	36W
520 LUMENS	1040 LUMENS	1560 LUMENS	1950 LUMENS	2600 LUMENS	3120 LUMENS	3900 LUMENS	4680 LUMENS

BODY COLOUR

WB-BB



JX SERIES

Power Options

4W	8W	12W	15W	20W	24W	30W	36W
520 LUMENS	1040 LUMENS	1560 LUMENS	1950 LUMENS	2600 LUMENS	3120 LUMENS	3900 LUMENS	4680 LUMENS

BODY COLOUR

WB-BB



HEAVY-DUTY ALUMINIUM BODY

Robust build for
long-lasting
performance.



RELIABLE PERFORMANCE

Stable, efficient
and flicker-free
lighting.



BRIGHT & EFFICIENT

High lumen output
with low power
consumption.



EASY INSTALLATION

Designed for quick
and hassle-free
setup.

BUILT STRONG. LIGHTS BRIGHT.



Heavy aluminium body

JV								
Power By : Bridgelux LED TEKNOLITE HPF DRIVER 4 CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)								
Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP	
JV-4	4W	520	WB-BB	36-45	Ø50X50	Ø42	580	
JV-8	8W	1040	WB-BB	36-45	Ø80X70	Ø74	900	
JV-12	12W	1560	WB-BB	36-45	Ø93X88	Ø82	1050	
JV-15	15W	1950	WB-BB	36-45	Ø93X88	Ø82	1340	
JV-20	20W	2600	WB-BB	36-45	Ø105X115	Ø100	1960	
JV-24	24W	3120	WB-BB	36-45	Ø105X115	Ø100	2200	
JV-30	30W	3900	WB-BB	36-45	Ø105X115	Ø100	2500	
JV-36	36W	4680	WB-BB	36-45	Ø105X115	Ø100	2800	



Heavy aluminium body

JX								
Power By : Bridgelux LED TEKNOLITE HPF DRIVER 4 CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)								
Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP	
Jx-4	4W	520	WB-BB	36-45	Ø50X50	Ø42	580	
Jx-8	8W	1040	WB-BB	36-45	Ø80X70	Ø74	900	
Jx-12	12W	1560	WB-BB	36-45	Ø93X88	Ø82	1050	
Jx-15	15W	1950	WB-BB	36-45	Ø93X88	Ø82	1340	
JX-20	20W	2600	WB-BB	36-45	Ø113X95	Ø100	1960	
JX-24	24W	3120	WB-BB	36-45	Ø113X95	Ø100	2200	
JX-30	30W	3900	WB-BB	36-45	Ø113X95	Ø100	2500	
JX-36	36W	4680	WB-BB	36-45	Ø113X95	Ø100	2800	



OLEE								
Power By : Bridgelux LED TEKNOLITE HPF DRIVER 4 CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)								
Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP	
OLEE-8	8W	1040	WB	36-45	Ø70X55	Ø65	1380	
OLEE-12	12W	1560	WB	36-45	Ø80X60	Ø81	1560	
OLEE-15	15W	1950	WB	36-45	Ø80X60	Ø81	1740	



VISCA								
Power By : Bridgelux LED TEKNOLITE HPF DRIVER 4 CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)								
Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP	
VISCA-8	8W	1040	WB	36-45	Ø72X80	Ø65	1761	
VISCA-12	12W	1560	WB	36-45	Ø84X80	Ø75	2041	
VISCA-15	15W	1950	WB	36-45	Ø84X80	Ø75	2236	



ELORA								
Power By : Bridgelux LED TEKNOLITE HPF DRIVER 4 CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)								
Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP	
ELORA-07	7W	910	WB	36-45	Ø 50X60	Ø45	1250	
ELORA-12	12W	1560	WB	36-45	Ø 65X70	Ø55	1400	
ELORA-18	18W	2340	WB	36-45	Ø 85X80	Ø75	2125	



ARYA								
Power By : Bridgelux LED TEKNOLITE HPF DRIVER 4 CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)								
Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP	
ARYA-8	8W	1040	WB-BB-NB	36-45	Ø68X66	Ø60	880	
ARYA-12	12W	1560	WB-BB-NB	36-45	Ø83X75	Ø75	1135	
ARYA-20	20W	2600	WB-BB-NB	36-45	Ø93X85	Ø85	2000	
ARYA-24	24W	3120	WB-BB-NB	36-45	Ø93X85	Ø85	2394	



JR

Power By : **EPISTAR** LED TEKNOLITE DRIVER

MODEL	WATT	LUMENS	BODY COLOUR	BEAM ANGLE	DIMENSION (MM)	CUTOUT	DLP
JR -4	4W	520	WB	25	Ø86X75	Ø50	320
JR -5	5W	650	WB	25	Ø102X80	Ø70	340
JR -10	10W	1300	WB	36	Ø145X120	Ø87	720



VLP

Power By : **SUNLUX** LED TEKNOLITE DRIVER CCT 3IN1

MODEL	WATT	LUMENS	BODY COLOUR	BEAM ANGLE	DIMENSION (MM)	CUTOUT	DLP
VLP-8	8W	1040	WB-NB-BB	45	Ø86X75	Ø50	800
VLP-12	12W	1560	WB-NB-BB	45	Ø102X80	Ø70	900



DV(L)

LIGHT ALUMINUM

Power By : **SUNLUX** LED TEKNOLITE DRIVER CCT 3IN1

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
DV-L-7	7W	910	WB-BB	45°	Ø90x90	Ø55	620
DV-L-12	12W	1560	WB-BB	45-60°	Ø85x80	Ø75	700
DV-L-18	18W	2340	WB-BB	45-60°	Ø90x90	Ø80	890

Heavy Aluminium Die Casting



TK-MR16

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

MODEL	WATT	LUMENS	BODY COLOUR	BEAM ANGLE	DIMENSION (MM)	DLP
MR-7	7W	910	WB-BB	45-60	H-53	1270
MR-12	12W	1560	WB-BB	45-60	H-63	1600
MR-18	18W	2340	WB-BB	45-60	H-78	2050



RC

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
RC-12	12W	1560	WB	36-45	Ø82x68	Ø72	1360
RC-20	20W	2600	WB	36-45	Ø106x88	Ø96	2008
RC-30	30W	3900	WB	36-45	Ø114x100	Ø107	2592



TEESTA

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
TEESTA-8	8W	1040	WB	36-45	Ø 70X50	Ø55	1600
TEESTA-12	12W	1560	WB	36-45	Ø 85X70	Ø75	2000
TEESTA-15	15W	1950	WB	36-45	Ø 85X70	Ø75	2150



TJ

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
TJ - 12	12W	1560	WB-NB	36	Ø60x95x95	Ø80	1139
TJ - 24	24W	3120	WB-NB	36	Ø60x175x95	Ø80x160	2503
TJ - 36	36W	4680	WB-NB	36	Ø60x255x95	Ø80x240	3402
TJ-12-RL	12W	1560	WB NB	36	Ø55x100	Ø80	1284



FLIX

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
FLIX-08	08W	910	WB-BB	36	Ø65X46	Ø55	1150
FLIX-12	12W	1560	WB-BB	36	Ø75X48	Ø65	1550
FLIX-18	18W	2340	WB-BB	36	Ø85X52	Ø75	2000



FLIX TWIN

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
FLIX-T-16	08X2W	2080	WB-BB	36-45	Ø122X65	Ø113X55	2300
FLIX-T-24	12X2W	3120	WB-BB	36-45	Ø162X85	Ø153X75	2700
FLIX-T-30	15X2W	3900	WB-BB	36-45	Ø162X85	Ø153X75	3200



VISION

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
VISION-08	08W	910	WB-BB	36	Ø43X35	Ø60	1250
VISION-12	12W	1560	WB-BB	36	Ø63X55	Ø75	1650



VISION TWIN

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
VISION-T-16	08X2W	2080	WB-BB	36-45	Ø162X83	Ø155X75	2470



TRUM

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
TRUM-12	12W	910	WB-BB	36	Ø83X65	Ø75	1250
TRUM-18	18W	1560	WB-BB	36	Ø105X75	Ø95	1650



TRUM TWIN

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
TRUM-T-24	12X2W	3120	WB-BB	36	Ø162X83	Ø150X70	2700
TRUM-T-36	18X2W	4680	WB-BB	36	Ø210X105	Ø195X90	3550



ES-127

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
ES-127	20W	2600	WB-NB	45	Ø90X95	Ø75	2265
ES-127-30	30W	3900	WB-NB	45	Ø110X105	Ø95	2824
ES-127-36	36W	4680	WB-NB	45	Ø30X133	Ø115	3145
ES-127-D	40W	5200	WB-NB	45	170X90X95	155x75	7062
ES-127D-60	60W	7800	WB-NB	45	210X110X105	192x95	8988



ZM

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
ZM-9	9W	1170	WB-BB	45	Ø97X80	Ø90	1555
ZM-15	15W	1950	WB-BB	45	Ø132X110	Ø125	2600
ZM-24	24W	3120	WB-BB	45	Ø145X113	Ø136	2600
ZM-36	36W	4680	WB-BB	45	Ø165X123	Ø145	3000



ZM-TWIN

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
ZM-T-30	15X2W	3900	WB-BB	45	Ø140x280mm	Ø260X132mm	5620
ZM-T-40	20X2W	5200	WB-BB	45	Ø140x280mm	Ø260X132mm	6460



RF

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable) Heavy Aluminium Die Casting

MODEL	WATT	LUMENS	BODY COLOUR	BEAM ANGLE	DIMENSION (MM)	CUTOUT	DLP
RF - 5	5W	650	WB-BB	45	Ø68X39	Ø58	468
RF - 8	8W	1040	WB-BB	45	Ø88X43	Ø70	600
RF - 12	12W	1560	WB-BB	45	Ø105X55	Ø85	996
RF - 20	20W	2600	WB-BB	45-60	Ø75X120	Ø105	1412
RF - 24	24W	3120	WB-BB	45-60	Ø75X120	Ø105	1500
RF - 30	30W	3900	WB-BB	45-60	Ø90X145	Ø135	1608
RF - 36	36W	4680	WB-BB	45-60	Ø90X145	Ø135	1770
RF - 40	40W	5200	WB-BB	45-60	Ø160X160	Ø145	2100
RF - 50	50W	6500	WB-BB	45-60	Ø100X160	Ø145	2250



PRISM

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable) Heavy Aluminium Die Casting

MODEL	WATT	LUMENS	BODY COLOUR	BEAM ANGLE	DIMENSION (MM)	CUTOUT	DLP
PR-20	20W	2600	WB-BB	45-60	Ø90X140	Ø120	1390
PR-24	24W	3120	WB-BB	45-60	Ø90X140	Ø120	1450
PR-30	30W	3900	WB-BB	45-60	Ø110X165	Ø145	1570
PR-36	36W	4680	WB-BB	45-60	Ø110X165	Ø145	1660
PR-40	40W	5200	WB-BB	45-60	Ø110X200	Ø175	2000
PR-50	50W	6500	WB-BB	45-60	Ø110X200	Ø175	2170

Premium Performance. Elegant Design.

A Class of it's own...
TEKNOLITE
LED Lighting

EXCLUSIVE SPOTLIGHT SERIES

Powered By : **Bridgelux**



Teknolite Driver

MV

Compact. Powerful. Reliable.



8W
1040
LUMENS



12W
1560
LUMENS



20W
2600
LUMENS

BODY COLOUR



WB
White Body



BB
Black Body

REFLECTOR COLOUR

WR White Reflector



NB Black Reflector



RG Rose Gold Reflector



MV-SF

Sleek Surface Mount.
Superior Illumination.



8W
1040
LUMENS



12W
1560
LUMENS



20W
2600
LUMENS

BODY COLOUR



WB
White Body



BB
Black Body

REFLECTOR COLOUR

WR White Reflector



NB Black Reflector



RG Rose Gold Reflector



2 YEARS
WARRANTY



ENERGY
EFFICIENT



HIGH
PERFORMANCE ⁸



PREMIUM
QUALITY



ECO
FRIENDLY



MV

Power By : Bridgelux LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Reflector Colour	Beam Angle	Dimension (mm)	Cutout	DLP
MV - 8	8W	1040	WB-BB	WR-NB-RG	36-45	Ø70X56	Ø60	599
MV - 12	12W	1560	WB-BB	WR-NB-RG	36-45	Ø85X67	Ø75	749
MV - 20	20W	2600	WB-BB	WR-NB-RG	36-45	Ø95X91	Ø84	1020



MV-SF

Power By : Bridgelux LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Reflector Colour	Beam Angle	Dimension (mm)	Cutout	DLP
Mv-8-SF	8W	1040	WB-BB	WR-NB-RG	36-45	Ø70X56	Ø60	660
Mv-12-SF	12W	1560	WB-BB	WR-NB-RG	36-45	Ø85X67	Ø75	756
Mv-20-SF	20W	2600	WB-BB	WR-NB-RG	36-45	Ø95X91	Ø84	1272



JCB

Power By : Bridgelux LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Reflector Colour	Beam Angle	Dimension (mm)	Cutout	DLP
JCB - 8	8W	1040	WB-BB	WH-GLD-NB-RG	36-45	Ø75X75	Ø65	1004
JCB - 12	12W	1560	WB-BB	WH-GLD-NB-RG	36-45	Ø83X83	Ø76	1120
JCB - 20	20W	2600	WB-BB	WH-GLD-NB-RG	36-45	Ø95X95	Ø85	1908



TS

Power By : Bridgelux LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
TS-7	7W	910	WB-BB	24	Ø40x55	Ø35	528
TS-7	7W	910	RG	24	Ø40x55	Ø35	528
TS-12	12W	1560	WB-BB	36	Ø60X80	Ø55	1150
TS-12	12W	1560	RG	36	Ø60X80	Ø55	1200
TS-20	20W	2600	WB-BB-RG	36	Ø 75X95	Ø68	2100
TS-24	24W	3120	WB-BB-RG	36	Ø 75X95	Ø68	2600



TEERA

Power By : Bridgelux LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Reflector Colour	Beam Angle	Dimension (mm)	Cutout	DLP
TEERA -8	8W	1040	COPPER-NB	-	40	Ø82x60	Ø73	1188
TEERA-12	12W	1560	COPPER-NB	-	40	Ø82x60	Ø73	1350
TEERA-SF-12	12W	1560	COPPER	-	40	Ø82x60	Ø73	1350

ORION PINHOLE

Power By : Bridgelux  TEKNOLITE HPF DRIVER  4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
ORION-07	07W	910	WB-BB	9	Ø50X60	Ø55	900
ORION-12	12W	1560	WB-BB	9	Ø55X70	Ø65	1130
ORION-15	15W	1950	WB-BB	9	Ø60X80	Ø75	1660

POLO PINHOLE

Power By : Bridgelux  TEKNOLITE HPF DRIVER  4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
POLO-07	07W	910	WB-BB	9-15	Ø55X69	Ø55	1050
POLO-10	10W	1300	WB-BB	9-15	Ø62X74	Ø65	1150
POLO-12	12W	1560	WB-BB	9-15	Ø72X78	Ø75	1400
POLO-15	15W	1950	WB-BB	9-15	Ø72X78	Ø95	2075

ARENA

Power By : Bridgelux  TEKNOLITE HPF DRIVER  4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
AR - 8	8W	1040	WB-BB	36	Ø55x65	Ø55	1231
AR - 12	12W	1560	WB-BB	36	Ø75x63	Ø75	1490

AUREX

Power By : Bridgelux  TEKNOLITE HPF DRIVER  4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
AUREX-8	8	1040	WB-BB	36	Ø60X85	Ø75	1222

IP54

VANS

Power By : Bridgelux  TEKNOLITE HPF DRIVER  4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Reflector	Beam Angle	Dimension (mm)	Cutout	DLP
VANS -12	12W	1560	WB-BB	WR-NB	55	Ø83x65	Ø75	1426
VANS -20	20W	2600	WB-BB	WR-NB	55	Ø103x70	Ø95	1892
VANS -30	30W	3900	WB-BB	WR-NB	55	Ø132x75	Ø120-125	2721

TIMA

Power By : Bridgelux  TEKNOLITE HPF DRIVER  4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
TIMA-07	07W	910	WB-BB	36-45	Ø52x69	Ø45	1536
TIMA-12	12W	1560	WB-BB	36-45	Ø62x74	Ø55	2000
TIMA-18	18W	2340	WB-BB	36-45	Ø72X78	Ø65	2445

BRIVE®
PREMIUM LED DOWNLIGHT

BRIVE COB

Deep Comfort. Bold Performance.

BRIVE COB Downlights deliver superior visual comfort and high efficiency with a sleek modern design. Engineered for performance. Built to last.



HIGH EFFICIENCY
Superior COB
LED performance



VISUAL COMFORT
Deep reflector for
glare control



DURABLE BUILD
Premium materials
for long life



EASY INSTALLATION
Spring clips for
secure fit




ASSEMBLY DIAGRAM

PROFESSIONAL DESIGN | HIGH QUALITY



HONEYCOMB MESH AVAILABLE



Reduces glare and enhances
visual comfort.

REFLECTOR COLOR OPTIONS



FOG SILVER



CHROME



GUN BLACK



MATT BLACK



GOLD



MATT WHITE



MATT BLACK



GUN BLACK



GOLD



CHROME



MATT WHITE



FOG SILVER



ENERGY SAVING
Lower power
consumption



LOW HEAT
Efficient heat dissipation
for longer life



SAFE & RELIABLE
Constant current driver
protection



ECO FRIENDLY
RoHS compliant
materials

BRIVE

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
BRIVE-8	8W	1040	WB-BB-NB	45	Ø65X60	Ø55	815
BRIVE-12	12W	1560	WB-BB-NB	45	Ø85X64	Ø75	1300
BRIVE-20	20W	2600	WB-BB-NB	45	Ø105X72	Ø95	1940
BRIVE-24	24W	3120	WB-BB-NB	45	Ø130X73	Ø115	2600
BRIVE-30	30W	3900	WB-BB-NB	45	Ø170X85	Ø145	4200

TZF

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
TZF-8	8W	1040	WB-NB	36	Ø60X60	Ø60	1602
TZF-12	12W	1560	WB-NB	36	Ø86X75	Ø75	1972
TZF-20	20W	2600	WB-NB	36	Ø100X90	Ø90	2671

RANZO

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
RANZO-08	08W	1040	WB-RG	36-45	Ø43X35	Ø60	1720
RANZO-12	12W	1560	WB-RG	36-45	Ø63X55	Ø70	2600
RANZO-20	20W	2600	WB-RG	36-45	Ø63X55	Ø85	4160

RIO

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
RIO-08	08W	1040	WB-RG	36-45	Ø43X35	Ø60	1800
RIO-12	12W	1560	WB-RG	36-45	Ø63X55	Ø70	2600
RIO-20	20W	2600	WB-RG	36-45	Ø63X55	Ø85	4150

LUCENTIS

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
LUCENTIS-07	07W	910	WB-BB	36-45	Ø50X60	Ø45	1720
LUCENTIS-12	12W	1560	WB-BB	36-45	Ø65X70	Ø55	2600
LUCENTIS-20	20W	2600	WB-BB	36-45	Ø85X80	Ø75	4160

BRONZE


Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
BRONZE-08	08W	1040	WB-BB	36-45	Ø80X65	Ø55	1320
BRONZE-12	12W	1560	WB-BB	36-45	Ø80X95	Ø75	1620
BRONZE-15	15W	1950	WB-BB	36-45	Ø80X95	Ø75	1820

BRONZE TRIMLESS

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

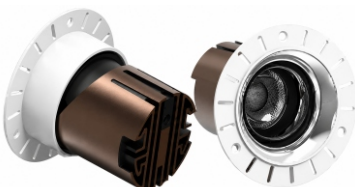

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
BRONZE-TR-08	08W	1040	WB-BB	36-45	Ø80X65	Ø55	1620
BRONZE-TR-12	12W	1560	WB-BB	36-45	Ø80X95	Ø75	1820
BRONZE-TR-15	15W	1950	WB BB	36-45	Ø80X95	Ø75	2120

A Class of it's own...



Smart Lighting

PREMIUM GALAXY SERIES

Ip20 & Ip65



Matte -Black



Matte -White



Shinny Black



Chrome



Rose - gold



Bright White



Bright Black





GALAXY

Power By : Bridgelux LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
GALAXY-07	07W	910	WB-BB	36	Ø 70X65	Ø55	925
GALAXY-12	12W	1560	WB-BB	36	Ø 70X65	Ø55	1200
GALAXY-15	15W	1950	WB-BB	36	Ø 70X65	Ø55	1525
GALAXY-18	18W	2340	WB-BB	36	Ø 75X85	Ø75	1575
GALAXY-24	24W	3120	WB-BB	36	Ø95X105	Ø95	2200



GALAXY IP65

Power By : Bridgelux LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
GALAXY-12	12W	1560	WB-BB	36	Ø 70X65	Ø55	1300
GALAXY-18	18W	2340	WB-BB	36	Ø 75X85	Ø75	1500
GALAXY-24	24W	3120	WB-BB	36	Ø95X105	Ø95	2350



MLE

Power By : Bridgelux LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
MLE -8	8W	1040	WB-NB	36	Ø60X73	Ø50	1844
MLE -12	12W	1560	WB-NB	36	Ø86X104	Ø75	2150
MLE -15	15W	1950	WB-NB	36	Ø86X104	Ø75	2600
MLE -20	20W	2600	WB-NB	36	Ø105X119	Ø95	3250
MLE -24	24W	3120	WB-NB	36	Ø105X119	Ø95	3750



TEEZA

Power By : Bridgelux LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Reflector	Beam Angle	Dimension (mm)	Cutout	DLP
TEEZA - 8	8W	1040	WB-BB	WR-NB	38	Ø60X50	Ø45	1814
TEEZA -12	12W	1560	WB-BB	WR-NB	38	Ø70X60	Ø55	2300
TEEZA -20	20W	2600	WB-BB	WR-NB	38	Ø80X70	Ø65	2857



NEXA

Power By : Bridgelux LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
NEXA-09	09W	1170	WB-BB	36-45	Ø60X56	Ø55	1700
NEXA-12	12W	1560	WB-BB	36-45	Ø80X63	Ø75	1900

PREMIUM

Zeno

SERIES



Smart Lighting




24°



36°



45°

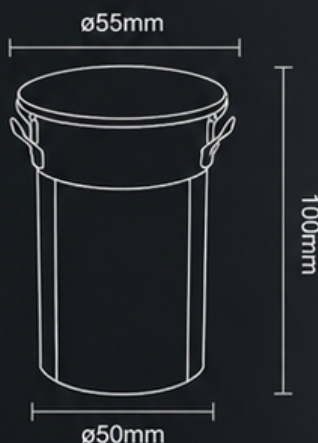

PREMIUM
FINISH



DURABLE
BUILD

15



IP65
RATING



EASY
INSTALLATION

ZENO

Power By : Bridgelux LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)



Model	Watt	Lumens	Reflector Colours	Beam Angle	Dimension (mm)	Cutout	DLP
ZENO-7	07W	910	white-matte black-nickel black-chrome- Bronze-gold	36	Ø70X45	Ø40	1500
ZENO-12	12W	1560		36	Ø70X45	Ø40	1900
ZENO-18	18W	2340		36	Ø120X45	Ø50	2600

SHYNE COB

Power By : Bridgelux LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)



Model	Watt	Lumens	Reflector Colours	Beam Angle	Dimension (mm)	Cutout	DLP
SHYNE-07	07W	910	white-matte black-nickel black-chrome- Bronze-gold	45-60	Ø62X43	Ø55	1050
SHYNE-12	12W	1560		45-60	Ø82x45	Ø75	1675
SHYNE-18	18W	2340		45-60	Ø105x49	Ø95	2650

RETRO

Power By : Bridgelux LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
RETRO-7	07W	910	WB-BB	36-45	Ø65X65	Ø55	775
RETRO-12	12W	1560	WB-BB	36-45	Ø75X85	Ø75	1150



ELUX DOWNLIGHT

Power By : **Bridgelux** **LED** TEKNOLITE HPF DRIVER **4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)**

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
ELUX-12	12W	1560	WB-BB	36-45	Ø55X85	Ø75	1450
ELUX-18	18W	2340	WB-BB	36-45	Ø60X110	Ø95	1990



OPTIX IP65

Power By : **Bridgelux** **LED** TEKNOLITE HPF DRIVER **4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)**

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
OPTIX-12	12W	1560	WB-BB	36-45	Ø84X80	Ø75	1050
OPTIX-18	18W	2340	WB-BB	36-45	Ø84X80	Ø95	1675
OPTIX-24	24W	3120	WB-BB	36-45	Ø84X80	Ø115	2650



COMPACT COB

Power By : **Bridgelux** **LED** TEKNOLITE HPF DRIVER **4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)**

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
COMPACT-12	12W	1560	WB-BB	36-45	Ø70X85	Ø75	1050



RL-H TRIMLESS

Power By : **Bridgelux** **LED** TEKNOLITE HPF DRIVER **4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)**

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
RL-H-12	12W	1560	WB-NB	36	Ø82x83	Ø82	1443
RL-H-15	15W	1950	WB-NB	36	Ø82x83	Ø82	2407



RL

Power By : **Bridgelux** **LED** TEKNOLITE HPF DRIVER **4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)**

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
RL-12	12W	1560	WB-BB	36	Ø73x90	Ø73	1072
RL-20	20W	2600	WB-BB	36	Ø84x110	Ø84	1610



CB IP 54

Power By : **Bridgelux** **LED** TEKNOLITE HPF DRIVER **4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)**

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
CB-8	8W	1040	WB-BB	36	Ø62x56	Ø55	1219
CB-12	12W	1560	WB-BB	36	Ø83x63	Ø75	1476



LEESO

Power By : **Bridgelux** **LED** TEKNOLITE HPF DRIVER **4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)**

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
LEESO-7	7W	910	WB-BB	24	Ø 62X82	Ø55	999
LEESO-12	12W	1560	WB-BB	36	Ø 72X82	Ø65	1270
LEESO-18	18W	2340	WB-BB	36	Ø 82X82	Ø75	2000

PREMIUM URANUS COB

A Class of It's own...

TEKNOLITE

Smart Lighting

GLAMOUR MIRROR LIGHT




GLAMOUR MIRROR LIGHT

Elegant. Natural. Flawless.



ADVANCED COB TECHNOLOGY

Engineered with high-performance COB LED and optimized thermal design for longer life, higher efficiency and superior performance.

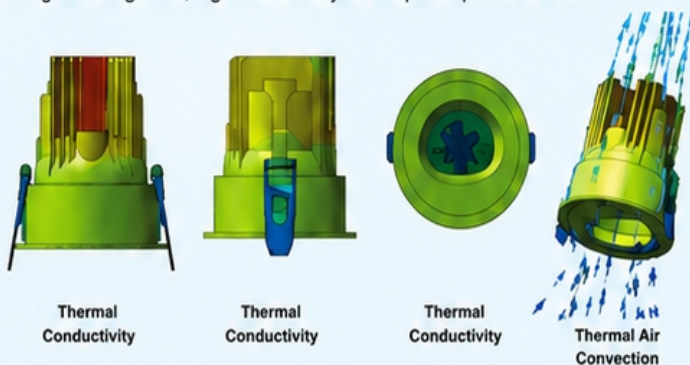

OPTICAL CONCEPT




Beauty mirror light:
The color is accurate
and transparent, and
the makeup will not
go wrong.
CRI: RA98
IES: Rf98, Rg102



Ordinary mirror headlight:
The color is dim, and there
are shadows on the side
face and bottom.


CRI: RA80



POLARIZED LENS

Polarized lenses can effectively
filter out stray light, reduce glare,
improve visual comfort, optimize
light distribution, and make lighting
more efficient and natural.

OPTICAL DESIGN FOR PERFECT LIGHTING

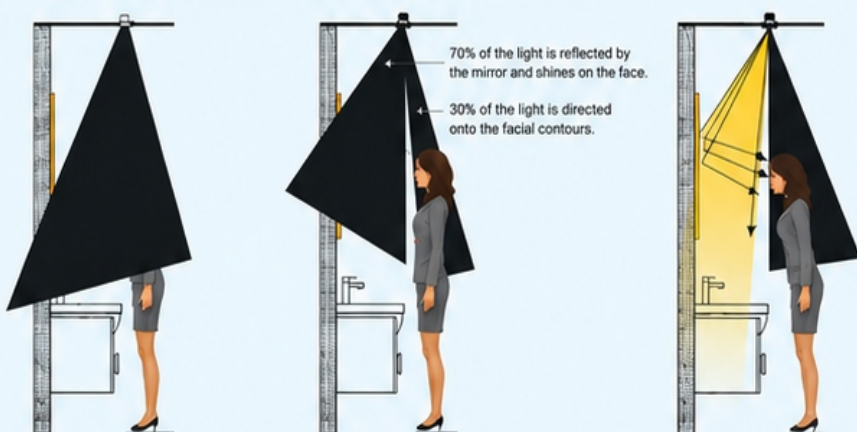

Ordinary mirror lights: direct light, no fill
light, create double shadows on the face,
the closer the person is to the mirror, the
light will be blocked by the head, and the

Beauty mirror light: The light is reflected
by the mirror, which effectively eliminates
shadows on the face and makes the face softer.

Patented optical design.
The closer you are to the mirror,
the more light your face will receive.

18

SPECIFICATIONS

Model	Uranus COB
Power	7W / 12W
Input Voltage	AC 220-240V~ 50/60Hz
LED Type	COB
CCT	3000K / 4000K / 6000K
CRI	RA98
Beam Angle	110°
Lumen Output	7W: 700lm 12W: 1200lm
Cutout	Ø75mm
Dimensions	Ø85 x H50mm
Finish	White
Housing Material	Aluminum
IP Rating	IP44 (Front)
Application	Bathroom Mirror, Vanity, Makeup Room, Dressing Area



High CRI
RA98



Flicker Free



Eye Comfort



Long Life
30,000 Hrs.



IP44
Moisture
Resistant



URANUS

Power By : **Bridgelux** **TEKNOLITE HPF DRIVER** **4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)**

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
URANUS-12	12W	1560	WB-BB	36-45	Ø88X85	Ø75	5175



Power By : **Bridgelux** **TEKNOLITE HPF DRIVER** **4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)**

PLATINA-WALL WASHER

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
PLATINA-12	12W	1560	WB-BB	36-45	Ø74X85	Ø75	1800
PLATINA-15	15W	1950	WB-BB	36-45	Ø74X85	Ø75	2500



ES

Power By : **Bridgelux** **TEKNOLITE HPF DRIVER** **4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)**

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
ES-121	12W	1560	WB	36	Ø101H	Ø75X85	1380
ES-120	12W	1560	WB	36	Ø101H	Ø75X85	1380



OLIVE

Power By : **Bridgelux** **TEKNOLITE HPF DRIVER** **4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)**

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
OLIVE-07	07W	910	WB-BB	36-45	Ø86X43	Ø35	1440
OLIVE-12	12W	1560	WB-BB	36-45	Ø94X63	Ø55	2000
OLIVE-18	18W	2340	WB-BB	36-45	Ø110X81	Ø75	3040



Power By : **Bridgelux** **TEKNOLITE HPF DRIVER** **4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)**

OLIVE MOVABLE

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
OLIVE-M-12W	12W	1560	WB-BB	36-45	-	Ø 55	1540
OLIVE-M-15W	15W	1950	WB-BB	36-45	-	Ø 75	1690



ESTRO

Power By : **Bridgelux** **TEKNOLITE HPF DRIVER** **4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)**

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
ESTRO-05	05W	650	WB-BB	36-45	Ø80X35	Ø30	1920
ESTRO-10	10W	1300	WB-BB	36-45	Ø96X45	Ø40	2560



PENCIL

Power By : **Bridgelux** **TEKNOLITE HPF DRIVER** **4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)**

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
PC-5	5W	650	WB-NB	36	Ø34X80	Ø32	1793
PC-10	10W	1300	WB-NB	36	Ø34X90	Ø42	2334
PC-5 TILT	5W	650	WB-NB	36	Ø35X90	Ø30	1993
PC-10 TILT	10W	1300	WB-NB	36	Ø44X100	Ø40	2534



ANOX

Power By : Bridgelux LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
ANOX-07	07W	910	WB-BB	36-45	Ø110X45	Ø35	1550
ANOX-12	12W	1560	WB-BB	36-45	Ø115X55	Ø45	1900
ANOX-18	18W	2340	WB-BB	36-45	Ø118X65	Ø55	2700



ANOX-TRIMLESS

Power By : Bridgelux LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
ANOX-TR-07	07W	910	WB-BB	36	Ø110X45	Ø35	1700
ANOX-TR-12	12W	1560	WB-BB	36	Ø115X55	Ø45	2150
ANOX-TR-18	18W	2340	WB-BB	36	Ø118X65	Ø55	2850



ASTERO

Power By : Bridgelux LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
ASTERO-07	07W	910	WB-BB	36-45	Ø110X45	Ø35	1625
ASTERO-12	12W	1560	WB-BB	36-45	Ø115X55	Ø45	2025
ASTERO-18	18W	2340	WB-BB	36-45	Ø115X65	Ø55	2750



ASTERO TRIMLESS

Power By : Bridgelux LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
ASTERO-TR-07	07W	910	WB-BB	36-45	Ø110X45	Ø35	1900
ASTERO-TR-12	12W	1560	WB-BB	36-45	Ø115X55	Ø45	2300
ASTERO-TR-18	18W	2340	WB-BB	36-45	Ø115X65	Ø55	3050



ASTERO ULTRA SLIM

Power By : Bridgelux LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
ASTERO-US-07	07W	910	WB-BB	36-45	Ø110X45	Ø35	1850
ASTERO-US-12	12W	1560	WB-BB	36-45	Ø115X55	Ø45	2300
ASTERO-US-18	18W	2340	WB-BB	36-45	Ø115X65	Ø55	2875



ASTERO ULTRA SLIM TRIMLESS

Power By : Bridgelux LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
ASTERO-US-TR-07	07W	910	WB-BB	36-45	Ø110X45	Ø35	2125
ASTERO-US-TR-12	12W	1560	WB-BB	36-45	Ø115X55	Ø45	2600
ASTERO-US-TR-18	18W	2340	WB-BB	36-45	Ø115X65	Ø55	3175

OZONE

PREMIUM COB

Precision Light. Premium Performance.



TRIM OPTIONS



Round Trim
(White)



Round Trim
(Black)



Trimless
(White)



Trimless
(Black)



ARCHITECTURAL GRADE FINISH

Designed to blend
elegance with
performance.



ENERGY EFFICIENT

Maximum light output
with minimal
energy use.



PERFECT FOR EVERY SPACE

Ideal for galleries,
retail, hospitality, and
modern interiors.



PREMIUM QUALITY

Meticulously crafted
to deliver a superior
lighting experience.



PREMIUM COB LED

High efficiency with
superior light output
and color accuracy.



SUPERIOR HEAT DISSIPATION

Advanced aluminum
heat sink ensures
long life and stability.



EASY INSTALLATION

Tool-free installation
with secure spring
mechanism.



BUILT TO LAST


High quality materials
for durability, reliability
and long-term use.



VISUAL COMFORT

Low glare and flicker-free
performance for a
pleasant lighting experience.

DIMENSIONS

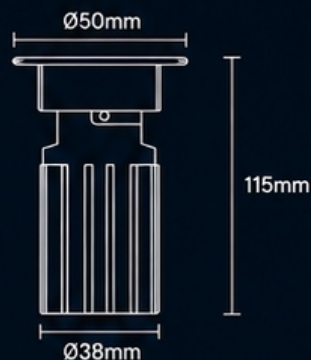

SHAPE LIGHT. ELEVATE SPACES.

Precision • Performance • Perfection



OZONE FIX

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
OZONE-F-10	10W	1300	WB-BB	36-45	Ø90X45	Ø40	1275
OZONE-F-15	15W	1950	WB-BB	36-45	Ø135X45	Ø40	1625
OZONE-F-20	20W	2600	WB-BB	36-45	Ø125X55	Ø50	1975



OZONE MOVABLE

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
OZONE-M-10	10W	1300	WB-BB	36-45	Ø100X53	Ø45	1850
OZONE-M-15	15W	1950	WB-BB	36-45	Ø95X63	Ø55	2300
OZONE-M-20	20W	2600	WB-BB	36-45	Ø135X63	Ø55	2775
OZONE-M-25	25W	3250	WB-BB	36-45	Ø125X75	Ø65	3125
OZONE-M-30	30W	3900	WB-BB	36-45	Ø165X75	Ø65	3750



OZONE TRIMLESS

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
OZONE-TR-10	10W	1300	WB-BB	36-45	Ø100X53	Ø45	1850
OZONE-TR-15	15W	1950	WB-BB	36-45	Ø95X63	Ø55	2300
OZONE-TR-20	20W	2600	WB-BB	36-45	Ø135X63	Ø55	2775
OZONE-TR-25	25W	3250	WB-BB	36-45	Ø125X75	Ø65	3125
OZONE-TR-30	30W	3900	WB-BB	36-45	Ø165X75	Ø65	3750



PLUTO ULTRA SLIM COB

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
PLUTO-07	07W	910	WB-BB	36-45	Ø60X42	Ø35	1900
PLUTO-12	12W	1560	WB-BB	36-45	Ø101X42	Ø35	2300
PLUTO-18	18W	2340	WB-BB	36-45	Ø112X55	Ø45	3050



STELLAR PINHOLE

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
STE-07	07W	910	WB-BB	9-15	Ø55X69	Ø30	1275
STE-15	15W	1950	WB-BB	9-15	Ø62X74	Ø40	1725
STE-18	18W	2340	WB-BB	9-15	Ø62X74	Ø50	2075

A Class of it's own...

CLUB SERIES



A Class of it's own...



ASSEMBLY DIAGRAM

FESSIONAL DESIGN | HIGH QUALITY



AVAILABLE IN 8 REFLECTOR
OPTIONS HONEYCOMB AVAILABLE



CLUB SERIES



CLUB TALL

Power By : Bridgelux LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Outer	Height	Cutout	DLP
CLUB-T-12	12W	1560	WB-BB	36-45	Ø65	113	Ø55	2050
CLUB-T-18	18W	2340	WB-BB	36-45	Ø85	148	Ø75	2450
CLUB-T-24	24W	3120	WB-BB	36-45	Ø85	148	Ø75	3050



CLUB TALL TRIMLESS

Power By : Bridgelux LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Outer	Height	Cutout	DLP
CLUB-T-TR-12	12W	1560	WB-BB	36-45	Ø65	113	Ø55	2150
CLUB-T-TR-18	18W	2340	WB-BB	36-45	Ø85	148	Ø75	2550
CLUB-T-TR-24	24W	3120	WB-BB	36-45	Ø85	148	Ø75	3150



CLUB TALL SQUARE

Power By : Bridgelux LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Outer	Height	Cutout	DLP
CLUB-T-SQ-12	12W	1560	WB-BB	36-45	Ø65	123	Ø55X58	2050
CLUB-T-SQ-18	18W	2340	WB-BB	36-45	Ø85	158	Ø75X78	2450
CLUB-T-SQ-24	24W	3120	WB-BB	36-45	Ø85	158	Ø75X78	3050



CLUB TALL SQ TRIMLESS

Power By : Bridgelux LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Outer	Height	Cutout	DLP
CLUB-T-SQ-TR-12	12W	1560	WB-BB	36-45	Ø65	123	Ø55X58	2150
CLUB-T-SQ-TR-18	18W	2340	WB-BB	36-45	Ø85	158	Ø75X78	2550
CLUB-T-SQ-TR-24	24W	3120	WB-BB	36-45	Ø85	158	Ø75X78	3150



CLUB TALL DOUBLE SQUARE

Power By : Bridgelux LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Outer	Height	Cutout	DLP
CLUB-T-DSQ-24	12X2W	3120	WB-BB	36-45	Ø115X65	123	Ø105X58	4100
CLUB-T-DSQ-36	18X2W	4680	WB-BB	36-45	Ø155X85	158	Ø145X78	4900



CLUB TALL DOUBLE SQ TRIMLESS

Power By : Bridgelux LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Outer	Height	Cutout	DLP
CLUB-T-DSQ-TR-24	12X2W	3120	WB-BB	36-45	Ø115X65	123	Ø105X58	4300
CLUB-T-DSQ-TR-36	18X2W	4680	WB-BB	36-45	Ø155X85	158	Ø145X78	5100

GLANZA[★]

PREMIUM SERIES

Illuminate Every Detail

A Class of it's own...

TEKNOLITE[®]

LED Lighting

REFLECTOR OPTIONS



PREMIUM
QUALITY



HIGH LUMEN
OUTPUT



MULTIPLE
FINISHES



DURABLE &
RELIABLE



ENERGY
EFFICIENT

GLARE CONTROL ACCESSORIES



DOWNLIGHT OPTIONS



FOG SILVER



CHROME



GUN BLACK



MATT BLACK



GOLD



MATT WHITE



MATT BLACK



GUN BLACK



ROSE GOLD



CHROME



MATT WHITE



FOG SILVER

CURVE ROUND



CURVE SQUARE



SQUARE TRIMLESS OPTIONS



MATT BLACK



GOLD

DUAL MODULE OPTIONS



TRIMLESS
DESIGN FOR
SEAMLESS
INTEGRATION

FLEXIBLE
CONFIGURATIONS
FOR EVERY
SPACE



EASY
INSTALLATION



EFFICIENT
HEAT DISSIPATION



25
LONG LIFE
PERFORMANCE



IDEAL FOR
COMMERCIAL & RESIDENTIAL

Premium Lighting. Timeless Elegance.



GLANZA

Power By : Bridgelux LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Outer	Height	Cutout	DLP
GLZ-07	07W	1560	WB-BB	36-45	Ø 78	65	Ø55	1275
GLZ-12	12W	1560	WB-BB	36-45	Ø 96	85	Ø75	1400
GLZ-18	18W	2340	WB-BB	36-45	Ø 108	85	Ø75	1850
GLZ-24	24W	3120	WB-BB	36-45	Ø 110	105	Ø95	2775



GLANZA TRIMLESS

Power By : Bridgelux LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Outer	Height	Cutout	DLP
GLZ-TR-07	07W	1560	WB-BB	36-45	Ø 78	65	Ø55	1425
GLZ-TR-12	12W	1560	WB-BB	36-45	Ø 96	85	Ø75	1550
GLZ-TR-18	18W	2340	WB-BB	36-45	Ø 108	85	Ø75	2150
GLZ-TR-24	24W	3120	WB-BB	36-45	Ø 110	105	Ø95	2975



GLANZA SQUARE

Power By : Bridgelux LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Outer	Height	Cutout	DLP
GLZ-SQ-12	12W	1560	WB-BB	36-45	85X85	106	Ø78X75	1500
GLZ-SQ-18	18W	2340	WB-BB	36-45	85X85	118	Ø78X75	1950
GLZ-SQ-24	24W	3120	WB-BB	36-45	105X105	124	Ø98X95	2875



GLANZA SQUARE TRIMLESS

Power By : Bridgelux LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Outer	Height	Cutout	DLP
GLZ-SQ-TR-12	12W	1560	WB-BB	36-45	85X85	106	Ø78X75	1550
GLZ-SQ-TR-18	18W	2340	WB-BB	36-45	85X85	118	Ø78X75	2150
GLZ-SQ-TR-24	24W	3120	WB-BB	36-45	105X105	124	Ø98X95	2975



GLANZA DOUBLE SQUARE

Power By : Bridgelux LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Outer	Height	Cutout	DLP
GLZ-DSQ-24	12X2W	1560	WB-BB	36-45	155x85	106	Ø145X78	3000
GLZ-DSQ-36	18X2W	2340	WB-BB	36-45	155x85	118	Ø145X78	3850



GLANZA DOUBLE SQUARE TRIMLESS

Power By : Bridgelux LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Outer	Height	Cutout	DLP
GLZ-DSQ-TR-24	12X2W	3120	WB-BB	36-45	155x85	106	Ø145X78	3200
GLZ-DSQ-TR-36	18X2W	4680	WB-BB	36-45	155x85	118	Ø145X78	4050



CURVE ROUND

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
CLUB-CURVE-R-07	7W	910	WB-NB	36-45	Ø 75X65	Ø55	1476
CLUB-CURVE-R-12	12W	1560	WB-NB	36-45	Ø81X85	Ø75	1861



CURVE ROUND TRIMLESS

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
CLUB-CURVE-RT-07	7W	910	WB-NB	36-45	Ø 85X65	Ø55	2118
CLUB-CURVE-RT-12	12W	1560	WB-NB	36-45	Ø 91X85	Ø75	4005



CURVE SQUARE

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
CLUB-CURVE-S-07	7W	910	WB-BB	36-45	Ø 85X65	Ø 55X58	2300
CLUB-CURVE-S-12	12W	1560	WB-BB	36-45	Ø 91X85	Ø 75X78	2600



CURVE SQUARE TRIMLESS

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
CLUB-CURVE-DST-07	7W	910	WB-BB	36-45	Ø 85X65	Ø 55X58	2450
CLUB-CURVE-DST-12	12W	1560	WB-BB	36-45	Ø 91X85	Ø 75X78	2750



CURVE DOUBLE SQUARE

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
CLUB CURVE-DS-14	7X2W	1820	WB-BB	36-45	Ø 85X115X65	Ø 105X58	5100



CURVE DOUBLE SQUARE TRIMLESS

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
CLUB-CURVE-DST-14	7X2W	1820	WB-BB	36-45	Ø 85X115X65	Ø 105X58	5500



FLARE

Power By : Bridgelux TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
FLARE-12	12W	1560	WB-NB	24-36	53X66	Ø45	1750



FLARE TRIMLESS

Power By : Bridgelux TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
FLARE-T-12	12W	1560	WB-NB	24-36	70X66	Ø42	1900



FLARE PINHOLE

Power By : Bridgelux TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
FLARE-P-12	12W	1560	WB-NB	24	53X66	Ø45	1850



FLARE TILTABLE

Power By : Bridgelux TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
FLARE-TL-12	12W	1560	WB-NB	24-36	70X66	Ø42	1850



FLARE-TILTABLE TRIMLESS

Power By : Bridgelux TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
FLARE-TL-TR-12	12W	1560	WB-NB	24-36	80X66	Ø50	2125



FLARE-TILTABLE PINHOLE

Power By : Bridgelux TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
FLARE-TL-P-12	12W	1560	WB-NB	24	63X66	Ø55	1975

A Class of it's own...



LED Lighting

LASER RECESSED LINEAR PINHOLE

PRECISION LIGHTING. ELEVATED SPACES.



PRECISE
LIGHT CONTROL



LOW GLARE
COMFORT



EASY
INSTALLATION




PREMIUM
QUALITY




AVAILABLE MODELS



RZR-P-4

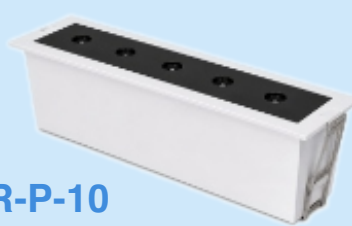

RZR-P-10



RZR-P-RD-6



RZR-P-12



RZR-P-14



RZR-P-24



Lamp can be customized
in different colors



Strong
electroplate
spring

IDEAL FOR



OFFICE



HOME



SHOWROOM

29



STUDIO



INTERIORS

RZR-PINHOLE

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
RZR-P-4	04W	520	WB-BB	36-45	—	—	1150
RZR-P-10	10W	1300	WB-BB	36-45	—	—	1475
RZR-P-12	12W	1560	WB-BB	36-45	—	—	1950
RZR-P-14	14W	1820	WB-BB	36-45	—	—	1950
RZR-P-24	24W	3120	WB-BB	36-45	—	—	1950
RZR-P-RD-6	06W	780	WB-BB	36-45	—	—	1475

RZR TILTABLE

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Reflector	Beam Angle	Dimension (mm)	Cutout	DLP
RZR-TILT -6	6W	780	WB-BB	Black	36	84X49X44	78X43	1088
RZR -TILT-12	12W	1560	WB-BB	Black	36	144x49x44	136X43	1761
RZR -TILT-24	12Wx2	3120	WB-BB	Black	36	255X49X44	250X43	2980

LINEA-SLEEK

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
LINEA-06	06W	780	WB-BB	36-45	Ø122X15	Ø75	1350
LINEA-12	12W	1560	WB-BB	36-45	Ø236X15	Ø95	2750

RZR

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Reflector Colour	Beam Angle	Dimension (mm)	Cutout	DLP
RZR-3-6	6W	780	WB-BB	BB-WH-NB-RG	36	68x30x36	61x23	756
RZR-6-12	12W	1560	WB-BB	BB-WH-NB-RG	36	124x30x36	117x23	1134
RZR-9-18	18W	2340	WB-BB	BB-WH-NB-RG	36	—	—	1960

ELY

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Reflector	Beam Angle	Dimension (mm)	Cutout	DLP
ELY-8	8W	1040	WB-BB	Black	24	40x50x30	40x50	1380
ELY- 24	24W	3120	WB-BB	Black	24	90x50x30	40x85	2350
ELY- 48	48W	6240	WB-BB	Black	24	50x138x30	40x124	4200

ASTRA

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
ASTRA-06	06W	780	WB-BB	36-45	Ø105X76	Ø46	3300
ASTRA-12	12W	1560	WB-BB	36-45	Ø165X76	Ø46	5600
ASTRA-18	18W	2340	WB-BB	36-45	Ø315X76	Ø46	9000



Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

GRID

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
GRID-14	14W	1820	WB-BB	36-45	Ø91X55	Ø75X45	2550
GRID-21	21W	2720	WB-BB	36-45	Ø162X55	Ø149X45	4700



Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

CUBIX-TRIMLESS

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
CUBIX-T-06	06W	780	WB-BB	36-45	Ø122X15	Ø75	1650
CUBIX-T-12	12W	1560	WB-BB	36-45	Ø126X40	Ø31	3250
CUBIX-T-20	20W	2600	WB-BB	36-45			4250



Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

GIMBAL DOUBLE & TRIPLE

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
GBL-40	2X20W	5200	WB-BB	45	Ø259x125x100	Ø238x125	4108
GBL-60	2X30W	7800	WB-BB	45	Ø259x125x100	Ø238x125	4722
GBL-60	3X20W	7800	WB-BB	45	Ø374X125X100	Ø353x125	5500
GBL-90	3X30W	11700	WB-BB	45	Ø374X125X100	Ø353x125	7832



Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

CUBA

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
CUBA - 7	7 W	910	WB-BB	45	Ø65x65x52mm	Ø54x54	1090
CUBA - 14	7x2 W	1820	WB-BB	45	Ø65x126x52mm	Ø54x114	2000
CUBA - 21	7x3 W	2730	WB-BB	45	Ø65x186x52mm	Ø54x175	2950
CUBA - 28	7x4 W	3640	WB-BB	45	Ø126x126x52mm	Ø115x115	3750



Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

STROKE

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	CUTOUT	DLP
STROKE-6	6	780	WB-BB	45	Ø102X41	95X35	1375
STROKE-12	12	1560	WB-BB	45	Ø162X41	120X35	2000



Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

HELIX-SF

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	DLP
HELIX-SF-10	10	1300	WB-BB	45	Ø140X32X56	1575
HELIX--SF-20	20	2600	WB-BB	45	Ø280X32X56	2400

LUME

A Class of it's own...

TEKNOLITE®

Smart Lighting

ANTI GLARE RECESSED MOUNTED LED LIGHT

SEE MORE • FEEL BETTER • LIVE BETTER



7W



14W







21W



28W

Available in
7W 14W 21W 28W

PRODUCT DIMENSIONS



SOFT LIGHTING. STRONG PERFORMANCE. SMART CHOICE.



ANTI GLARE

Comfortable
Lighting



**RECESSED
MOUNTED**

Seamless &
Stylish Look



**ENERGY
EFFICIENT**

Save More
Energy



**DURABLE &
RELIABLE**

Built
To Last



**SMART
DESIGN**

Modern | Minimal
Functional



**PERFECT FOR
EVERY SPACE**

Home | Office
Retail | Hospitality



High
Performance LED



Elegant &
Minimal Design




Easy
Installation



Long
Life



Low
Maintenance

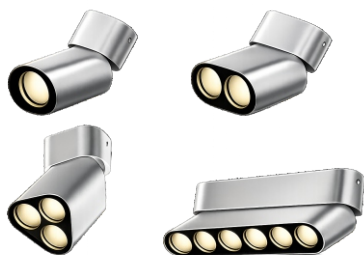

LUME

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	DLP
LUME-10	10W	1300	Metal Black, Metal Grey	36	Ø47X37X117	1650
LUME-15	15W	1950	Metal Black, Metal Grey	36	Ø67X37X117	2000
LUME-20	20W	2600	Metal Black, Metal Grey	36	Ø67X63X117	2950
LUME-36	36W	4680	Metal Black, Metal Grey	36	Ø187X37X117	3800



LAVIA

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
LAVIA-9	9W	1170	Metal Black, Metal Grey	36	Ø102X62X85	Ø55	1850
LAVIA-15	15W	1950	Metal Black, Metal Grey	36	Ø102X82X85	Ø75	2400



BB TWIN

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Reflector Colour	Beam Angle	Dimension (mm)	Cutout	DLP
BB-207	7Wx2	1640	WB-BB	WR-BK	38	Ø61X140X93	Ø52x125	4660
BB-212	12Wx2	2880	WB-BB	WR-BK	38	Ø195X125	Ø175	5450



BB SINGLE

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Reflector Colour	Beam Angle	Dimension (mm)	Cutout	DLP
BB-107	7W	840	WB-BB	WR-BK	38	Ø61X93	Ø 45	2100
BB-112	12W	1440	WB-BB	WR-BK	38	Ø83X104	Ø 55	2600



FN

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	DLP
FN-MOV	5W	650	WB	38	Ø40x90	1240



FN

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	DLP
FN-FIX	7W	910	BB	38	Ø40x70	1049



FN Frame

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Type	Body Colour	Dimension (mm)	Cutout	DLP
FN1-RD	Modular	WB-BB	Ø50	Ø40	241



FN Frame

Power By : **Bridgelux** LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Type	Body Colour	Dimension (mm)	Cutout	DLP
FN1-SQ	Modular	WB-BB	40x50x30	40x50	381
FN2-SQ	Modular	WB-BB	90x50x30	40x85	540
FN3-SQ	Modular	WB-BB	50x138x30	40x124	794

PREMIUM STELLA SERIES

PRECISION
DESIGN
POWERFUL
PERFORMANCE

COB SPOTLIGHT

**ILLUMINATE WITH ELEGANCE.
PERFORM WITH EXCELLENCE.**

The Stella Series COB Spotlight is engineered for spaces that demand superior lighting and refined aesthetics. With its advanced COB technology, precision optics, and sleek design, Stella delivers exceptional brightness, energy efficiency, and visual comfort.



HIGH LUMEN OUTPUT

Powerful COB LED for brilliant illumination



PRECISE BEAM CONTROL

Narrow to wide beam options



PREMIUM BUILD QUALITY

Durable body with high-grade finish



ADJUSTABLE DESIGN

Flexible tilt & rotation for perfect positioning



ENERGY EFFICIENT

Low power consumption with long life



VERSATILE CONFIGURATIONS

SINGLE SPOTLIGHT



DOUBLE SPOTLIGHT



MULTI SPOTLIGHTS



TECHNICAL SPECIFICATIONS



LIGHT SOURCE
COB LED



WATTAGE
7W / 12W / 18W / 25W



COLOR TEMPERATURE
2700K / 3000K / 4000K / 6000K



CRI
> 90



BEAM ANGLE
15° / 24° / 36° / 60°



INPUT VOLTAGE
AC 100-240V 50/60Hz



MATERIAL
Aluminium Die-Cast



FINISH
White / Black



LIFESPAN
50,000 Hours

AVAILABLE COLORS



WHITE



BLACK



COMMERCIAL SPACES
Shops, Offices, Showrooms



HOSPITALITY
Hotels, Restaurants, Lobbies



RESIDENTIAL
Living Rooms, Bedrooms, Kitchens



GALLERIES & MUSEUMS
Accentuate Art and Architectural Details



Power By : **Bridgelux** **TEKNOLITE HPF DRIVER** **4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)**

STELLA LANIX REF DOUBLE

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
LANIX REF DOUBLE	12X2W	2400	WB-NB	36	Ø160x85x60	Ø150x75	4406



Power By : **Bridgelux** **TEKNOLITE HPF DRIVER** **4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)**

STELLA LANIX REF

Model	Watt	Lumens	Body Colour	Reflector	Beam Angle	Dimension (mm)	Cutout	DLP
LANIX REF	12W	1440	WB	NB	38	Ø85x57	Ø76	2138



Power By : **Bridgelux** **TEKNOLITE HPF DRIVER** **4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)**

STELLA LANIX FOCUS

Model	Watt	Lumens	Body Colour	Reflector	Beam Angle	Dimension (mm)	Cutout	DLP
LANIX FOCUS	12W	1440	WB	NB	38	Ø85x70	Ø75	2138



Power By : **Bridgelux** **TEKNOLITE HPF DRIVER** **4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)**

STELLA LANIX SPOT

Model	Watt	Lumens	Body Colour	Reflector	Beam Angle	Dimension (mm)	Cutout	DLP
LANIX SPOT	12W	1440	WB	NB	38	Ø85x57	Ø75	2138



Power By : **Bridgelux** **TEKNOLITE HPF DRIVER** **4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)**

STELLA ORIX REF

Model	Watt	Lumens	Body Colour	Reflector	Beam Angle	Dimension (mm)	Cutout	DLP
ORIX REF	12W	1440	WB	NB	38	Ø65x105	Ø55	2138



Power By : **Bridgelux** **TEKNOLITE HPF DRIVER** **4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)**

STELLA ORIX FOCUS

Model	Watt	Lumens	Body Colour	Reflector	Beam Angle	Dimension (mm)	Cutout	DLP
ORIX FOCUS	12W	1440	WB	NB	38	Ø65x116	Ø55	2138



Power By : **Bridgelux** **TEKNOLITE HPF DRIVER** **4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)**

STELLA ORIX SPOT

Model	Watt	Lumens	Body Colour	Reflector	Beam Angle	Dimension (mm)	Cutout	DLP
ORIX SPOT	12W	1440	WB	NB	38	Ø65x105	Ø55	2138



Power By : **Bridgelux** **TEKNOLITE HPF DRIVER** **4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)**

STELLA ORIX SPOT

Model	Watt	Lumens	Body Colour	Reflector	Beam Angle	Dimension (mm)	Cutout	DLP
ORIX SPOT	18W	1440	WB	NB	38	Ø105x73	Ø95	2138

TEKNOLITE®

LED LIGHTING

— PREMIUM —

TRACK BEAMER

Precision lighting. Perfect focus.



15° to 60°

Stepless Zooming



High CRI

True Color Rendering



Energy Efficient

Low Power, High Output



Easy Installation

Compatible with
Standard Tracks



ADJUST BEAM ANGLE FREELY

15°



36°



55°




CCT ADJUSTABLE

TRACK BEAMER-Z



Light adjustable



PRODUCT DIMENSIONS

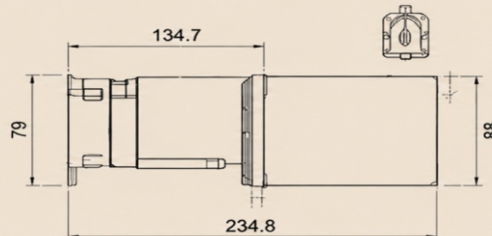

ADAPTER COMPATIBILITY



SPECIFICATIONS



WATTAGE
30W



DIMMING OPTIONS
Standard / 0-10V DIM /
Triac Dim / DALI dimmable



ZOOM RANGE
Wide beam angle 70°



CCT ADJUSTABLE
2700K / 3000K / 4000K /
5000K / 5700K



LIGHTING SPECIFICATIONS
IP20, CRI>90/95



LED TYPE
CITIZEN / CREE / OSRAM LEDs



WIRING CONFIGURATION
2wires / 3wires / 4wires / 6 wires



COLOR TEMPERATURE
2700K / 3000K / 4000K / 5000K /
5700K / RGBW



LIGHT EFFICIENCY
1500lm



LED DRIVER
TRIDONIC / PHILIPS /
OSRAM drivers



MOUNTING TYPE
Adapter on track /
Surface mounted



INPUT VOLTAGE
AC200-240V 50/60Hz



LIFESPAN
Ta40°C L70> 54000 hours

雅





TYRA

Power By : Bridgelux LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	DLP
TYRA-12	12W	1560	WB-BB	48	75x100	1010
TYRA-20	20W	2600	WB-BB	48	75x125	1434
TYRA-30	30W	3900	WB-BB	48	90x140	1650
TYRA-36	36W	4680	WB-BB	48	75x145	1990



TRKB

Power By : Bridgelux LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	DLP
TRKB-20	20W	2600	WB-BB	45-60	-	2332
TRKB-30	30W	3900	WB-BB	45-60	-	2950
TRKB-40	40W	5200	WB-BB	45-60	-	3500



TRKB-AR

Power By : Bridgelux LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	DLP
TRKB-AR-20	20W	2600	WB-BB	45-60	-	2332
TRKB-AR-30	30W	3900	WB-BB	45-60	-	2950
TRKB-AR-40	40W	5200	WB-BB	45-60	-	3500



TRKB-CON

Power By : Bridgelux LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	DLP
TRKB-CON-12	12W	1560	WB-BB	45-60	50x135	1900
TRKB-CON-20	20W	2600	WB-BB	45-60	60x150	2650
TRKB-CON-30	30W	3900	WB-BB	45-60	80x180	3250



TYRA-SF

Power By : Bridgelux LED TEKNOLITE HPF DRIVER 4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	DLP
TYRA-12-S	12W	1560	WB-BB	48	75x100	1110
TYRA-20-SF	20W	2600	WB-BB	48	75x125	1390
WL0-7-SF	7W	910	WB-BB	48		756

A Class of it's own...

TEKNOLITE

LED Lighting

A CLASS OF
it's
OWN...

+
Complete Solution for

SMART LED LIGHTING

— LIGHT YOUR MOMENT —

JEWELLERY LED RETAIL DISPLAY LIGHT WITH ADJUSTABLE SPOTLIGHT



Discreet design for
uninterrupted visual flow



Ideal for glass cabinets,
niche artefacts, and
premium retail display



Material: Aluminium

3W MOVING HEAD JEWELRY STANDING LIGHT

PERFECT LIGHTING
TO ENHANCE
EVERY JEWEL



Adjustable
Spotlight



Focused Beam
10°–37°



Brilliant Display
for Precious
Jewellery

PRODUCT SPECIFICATIONS

Item Name:	LED display light
Item No.:	3310 / 3320
LED Qty:	2 pc (3310) / 3 pc (3320)
Power:	3W
Color Temperature:	3000K 4000K 6000K
Beam Angle:	10°–37° (Adjustable)
Input Voltage:	AC100–240V 50–60HZ
LED Chips:	Cree LED
Installation:	Surface mounted
Lifespan:	30000–50000 Hours
Body Colors:	Silver, Black



Black



Silver



White

LED COLOR TEMPERATURE

2700K

3000K

4000K

6000K

ON ORDER


DLP-3700/-

DLP-2650



ADJUSTABLE BEAM LENS

10°–37°



(MIN 12 PIECE BOX PACKING)

2 WIRE HEAVY ALUMINUM TRACK CHANNEL

(20 PCS BOX PACKING)



2 Wire Track Channel -
1mtr - WH/BK

₹ 590.00



2 Wire Track Channel -
2mtr - WH/BK

₹ 1200.00



2 Wire I Connector -
White / Black

₹ 200.00



2 Wire L Connector -
White / Black

260.00



2 Wire T Connector -
White / Black

₹ 400.00



2 Wire X Connector -
White / Black

545.00



2 Wire Power Head /
Feeder - White / Black

₹ 210.00



2 Wire Adaptor -
White / Black

₹ 390.00



2 Wire End Cap -
White / Black

₹ 120.00



ROUND BAZE
WHITE / BLACK
for 6212D Kit

₹ 1080.00



Wire Joints -
White / Black

₹ 600.00

2 WIRE HEAVY ALUMINUM CONCEALED CHANNEL

(20 PCS BOX PACKING)



2 Wire Concealed Track Channel - 1mtr - WH
2 Wire Concealed Track Channel - 1mtr - BK
2 Wire Concealed Track Channel - 2mtr - WH
2 Wire Concealed Track Channel - 2mtr - BK

1 mtr - 1400.00
2 mtr - 2300.00



2 Wire Concealed I
Connector - White / Black

400.00



2 Wire Concealed L
Connector - White / Black

630.00



2 Wire Concealed T
Connector - White / Black

960.00



2 Wire Concealed X
Connector - White / Black

1000.00



2 Wire Concealed Power Head / Feeder
- White / Black

290.00



2 Wire End Cap
Connector - White / Black

140.00

A Class of it's own...



LED Lighting

PRIME PRODUCT TELESCOPE

Zoomable Adjustable Beam-Angle
10°-55° Surface Cylindrical Ceiling
Focus Accent Spot Down Light

Specialized LED fixtures designed for adjustable accent, task, and display lighting. Allow users to focus light tightly (10°) for highlighting artwork or widen it (55°) for the general wash lighting by rotating the lens with flicker-free



FOCUS PRECISELY
From narrow spot
to wide flood



ZOOM & ADJUST
Smooth rotation for
perfect control




HIGH VISUAL COMFORT
Flicker-free for
eye-friendly lighting



ENERGY EFFICIENT
Save more,
shine more

ADJUSTABLE BEAM ANGLE 10°-55°

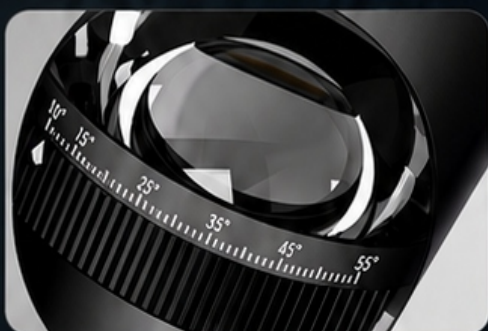


Rotate the lens to easily adjust the beam angle from 10° to 55°.

ZOOMABLE FOCUS CONTROL



Smooth zoom function for precise lighting control and flexibility

DIFFERENT BEAM EFFECTS

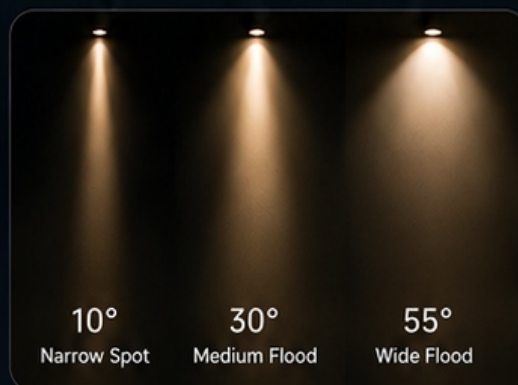

10°

Narrow Spot

30°

Medium Flood

55°

Wide Flood

SPECIFICATIONS



Power
15W | 20W | 25W | 30W



Size
Ø55*900mm | Ø65*100mm
Ø75*115mm | Ø85*130mm



Reflector Color
White | Black



Trim Finishes
White | Black



39

IDEAL FOR



Art Galleries & Museums



Retail & Showrooms



Hotels & Hospitality



Residential Accent Lighting



Exhibitions & Displays

on order

Power By : Bridgelux  TEKNOLITE HPF DRIVER  4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

CANVA SURFACE



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	DLP
CANVA-SF-12	12W	1560	WB-BB	36-45	Ø65X75	1080



**ON ORDER Ip54
ADDITIONAL CHARGE**


SFC

Power By : Bridgelux  TEKNOLITE HPF DRIVER  4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Reflector Colour	Beam Angle	Dimension (mm)	DLP
SFC-605	5W	650	WB-BB	WR-NB-RG	36	Ø50X50	678
SFC-606	7W	910	WB-BB	WR-NB-RG	36	Ø62X72	756
SFC-607	12W	1560	WB-BB	WR-NB-RG	36	Ø77X90	1080
SFC-616	12W	1560	WB-BB	WR-NB-RG	36	Ø77X90	1116
SFC-617	20W	2600	WB-BB	WR-NB-RG	36	Ø88X110	1380
SFC-624	24W	3120	WB-BB	NB-RG	36	Ø88X110	1578

PDL

Power By : Bridgelux  TEKNOLITE HPF DRIVER  4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)



Model	Watt	Lumens	Body Colour	Reflector Colour	Beam Angle	Dimension (mm)	DLP
PDL-605	5W	650	WB-BB	WR-NB-RG	36	Ø34X58	932
PDL-606	7W	910	WB-BB	WR-NB-RG	36	Ø55X100	1014
PDL-607	12W	1560	WB-BB	WR-NB-RG	36	Ø55X150	1353
PDL-616	12W	1560	WB-BB	WR-NB-RG	36	Ø75X100	1392
PDL-617	20W	2600	WB-BB	WR-NB-RG	36	Ø75X125	1669
PDL-624	24W	3120	WB-BB	NB-RG	36	Ø95X130	1878



SFR

Power By : Bridgelux  TEKNOLITE HPF DRIVER  4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	DLP
SFR-7012	12W	1560	WB-BB	48	Ø72X85	1452
SFR-7020	20W	2600	WB-BB	48	Ø92X100	2204
SFR-7030	30W	2900	WB-BB	48	Ø122X115	2620
SFR-50	50W	6500	WB-BB	48	Ø142X145	3036



SJ

Power By : Bridgelux  TEKNOLITE HPF DRIVER  4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Reflector Colour	Beam Angle	Dimension (mm)	DLP
SJ-8	8W	1040	WB-BB	WR-NB-RG	36	53X53X72	948
SJ-12	12W	1560	WB-BB	WR-NB-RG	36	75X75X95	1128
SJ-24	24W	3120	WB-BB	WR-NB-RG	36	75X50X95	1704



Power By : **Bridgelux** **TEKNOLITE HPF DRIVER** **4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)**

NEXUS PREMIUM SURFACE

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	DLP
NEXUS-12	12W	1560	WB-BB	36-45	Ø76X55	1700
NEXUS-18	18W	2340	WB-BB	36-45	Ø82X75	2075



Power By : **Bridgelux** **TEKNOLITE HPF DRIVER** **4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)**

LUNA PREMIUM SURFACE IP65

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	DLP
LUNA-SF-07	07W	910	WB-BB	36-45	Ø75X54	2250
LUNA-SF-12	12W	1560	WB-BB	36-45	Ø85X75	3300
LUNA-SF-18	18W	2340	WB-BB	36-45	Ø95X95	4750
LUNA-SF-24	24W	3120	WB-BB	36-45	Ø110X120	6750
LUNA-SF-30	30W	3900	WB-BB	36-45	Ø130X150	9600



Power By : **Bridgelux** **TEKNOLITE HPF DRIVER** **4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)**

NEXUS SURFACE PINHOLE

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	DLP
NEX-08	08W	910	WB-BB	24	Ø67X53	1650
NEX-12	12W	1520	WB-BB	24	Ø80X73	2050
NEX-20	20W	2600	WB-BB	24	Ø85X95	3150



BT8 (Honeycomb)

BTSFC

Power By : **Bridgelux** **TEKNOLITE HPF DRIVER** **4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)**

Model	Watt	Lumens	Body Colour	Reflector Colour	Beam Angle	Dimension (mm)	DLP
BT-12-SFC	12W	1560	WB-BB	WH-BK	38	Ø76X85	2291
BT-15-SFC	15W	1950	WB-BB	WH-BK	38	Ø100X105	2442



BTZ

Power By : **Bridgelux** **TEKNOLITE HPF DRIVER** **4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)**

Model	Watt	Lumens	Body Colour	Reflector Colour	Beam Angle	Dimension (mm)	DLP
BTZ-8	8W	1040	WB-BB	WH-NB-RG	36	Ø63X78	980
BTZ-12	12W	1560	WB-BB	WH-NB-RG	36	Ø78X95	1200
BTZ-15	15W	1950	WB-BB	WH-NB-RG	36	Ø88X105	1320



LED Lighting

MOON PREMIUM SURFACE DOWNLIGHT

NEW DESIGN

Minimalist elegance.
Maximum impact.

Crafted with precision and designed for modern interiors, our Moon Premium Surface Downlight delivers refined illumination with a sleek architectural presence.



COLOR OPTIONS



CRI
>90

UGR
<19

36°


AC
220-240V

IP20

SPECIFICATIONS

Type	Surface Downlight
Material	Aluminium
Light Source	High Performance LED
Power	6W / 12W / 18W / 24W
Color Temperature	2700K / 3000K / 4000K / 6000K
CRI	>90
Beam Angle	36°
Input Voltage	AC 220-240V
IP Rating	IP20
Finish Options	8 Premium Combinations
Lifespan	50,000 Hours

DIMENSIONS

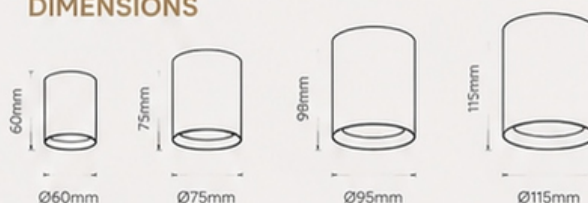

PREMIUM
FINISH



HIGH PERFORMANCE
LED



EASY SURFACE
INSTALLATION



ENERGY
EFFICIENT



LONG
LIFESPAN



MODERN DESIGN
Seamless integration
with any interior



SOFT & FOCUSED LIGHT
Comfortable ambiance
with reduced glare



DURABLE BUILD
High-quality aluminium
for long-lasting use



IDEAL FOR
Homes, Hotels, Offices,
Retail & Hospitality



MOON

Power By : Bridgelux Teknolite Driver



4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	DLP
MOON-12	12W	1560	WB-BB	60	Ø92X65X75	1450
MOON-18	18W	2340	WB-BB	60	Ø122X65X75	2050
MOON-24	24W	3120	WB-BB	60	Ø142X65X75	2900



RDD PRO

Power By : Bridgelux Teknolite Driver



4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
RDD-PRO-12	12W	1560	WB-BB/BB-WB	120	Ø100X50	Ø92	1000
RDD-PRO-18	18W	2340	BB-SB/WB-SB	120	Ø130X50	Ø120	1350
RDD-PRO-24	24W	3120	WB-RG/BB-RG	120	Ø150X50	Ø140	1840
RDD-PRO-CC-12	12W	1560	WB-BB/BB-WB	120	Ø100X50	Ø92	1300
RDD-PRO-CC-18	18W	2340	BB-SB/WB-SB	120	Ø130X50	Ø120	1950
RDD-PRO-CC-24	24W	3120	WB-RG/BB-RG	120	Ø150X50	Ø140	2640



CRYSTO DOWNLIGHT

Power By : Bridgelux Teknolite Driver



4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
CRYSTO-12	12W	910	WB-BB	36-45	Ø85X50	Ø75	1100
CRYSTO-12-CC	12W	1560	WB-BB	36-45	Ø85X50	Ø75	1500
CRYSTO-18	18W	2340	WB-BB	36-45	Ø115X105	Ø105	1600
CRYSTO-18-CC	18W	2340	WB-BB	36-45	Ø115X105	Ø105	2050
CRYSTO-24	24W	1560	WB-BB	36-45	Ø165X155	Ø155	2200
CRYSTO-24-CC	24W	2340	WB-BB	36-45	Ø165X155	Ø155	2750



RLD

Power By : Bridgelux Teknolite Driver



4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
RLD-12-RD	12W	1560	WB-BB	100	Ø120X50	Ø108	780
RLD-18-RD	18W	2340	WB-BB	100	Ø155X55	Ø137	1002
RLD-18-CC	18W	2340	WB-BB	100	Ø155X55	Ø137	1596
RLD-24-RD	24W	3120	WB-BB	100	Ø175X55	Ø165	1380
TNRLD-20-RD	20W	2600	WB BB	100	Ø155X55	Ø165	2484



RLD

Power By : Bridgelux Teknolite Driver



4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
RLD-18-SQ	18W	2160	WB-BB	100	Ø145X57	Ø137	1002
RLD-18-SQCC	18W	2160	WB-BB	100	Ø145X57	Ø137	1596
RLD-24-SQ	24W	2880	WB-BB	100	170x170x65	158x158	1380
(TUNABLE) TNRLD-20-SQ/RD	20W	2880	WB-BB	100	170x170x65	158x158	2484



JDD

Power By : Bridgelux Teknolite Driver



4CCT Switch (WW-NW-CW & 3in1) 2.4G (Dimmable & Tunable)

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
JDD-12	12W	1560	WB	100	Ø87x50	Ø72	690
JDD-15	15W	1950	WB	100	Ø105x50	Ø90	876
JDD-22	22W	2860	WB	100	Ø125x60	Ø105	1062



DDR FLAT DOWNLIGHT



Power By : **EDISON LED** LED Colour : 3000K, 4000K, 6500K

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
DDR-RD-16	16	2080	WB	120	Ø 86X120	Ø105	470
DDR-RD-24	24	3120	WB	120	Ø 134X170	Ø155	570
DDR-RD-32	32	4160	WB	120	Ø 186X225	Ø 205	750
DDR-SQ-16	16	2080	WB	120	Ø 86X120	Ø 105	470
DDR-SQ-24	24	3120	WB	120	Ø 134X170	Ø 155	570
DDR-SQ-32	32	4160	WB	120	Ø 186X225	Ø 205	750



LB ALUMINUM HEAVY BODY

Power By : **EDISON LED**

LED Colour : 3000K, 4000K, 6500K

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
LB-12	12W	1560	WB-BB	120	Ø125X125X23	Ø115	828
LB-15	15W	1950	WB-BB	120	Ø142X142X23	Ø133	906
TN-LB-15	15W	1950	WB-BB	120	Ø142X142X23	Ø133	1872
LB-15-SF	15W	1950	WB-BB	120	Ø135X135X30	Ø133	1200
LB-24	24W	3120	WB-BB	120	Ø200X200X23	Ø187	1620



LZP ALUMINIUM HEAVY BODY



Power By : **EDISON LED** LED Colour : 3000K, 4000K, 6500K

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
LZP-15-SQ	15W	1950	WB	120	168X168X22	143X143	828
LZP-18-SQ	18W	2340	WB	120	180X180X25	160X160	1110
LZP-22-SQ	22W	2860	WB	120	220X220X22	195X195	1272
(TUNABLE) TN-LZP-15-SQ	15W	1950	WB	120	168X168X22	143X143	1758
(TUNABLE) TN-LZP-15-RD	15W	1950	WB	120	180X180X2	143X143	1758



LZP-AS-SURFACE ALUMINUM



Power By : **EDISON LED** LED Colour : 3000K, 4000K, 6500K

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	DLP
LZP-6-SF-RD/SQ	6W	600	WB	120	101 X22	510
LZP-8-SF -RD/SQ	8W	800	WB	120	101X22	510
LZP-12-SF-RD/SQ	12W	1200	WB	120	127 X22	576
LZP-15-SF-RD/SQ	15W	1500	WB	120	152 X22	600
LZP-18-SF-RD/SQ	18W	1800	WB	120	178 X22	690
LZP-22-SF-RD/SQ	22W	2200	WB	120	203 X22	936



LZP-AS-CC

Power By : **EDISON LED**

LED Colour : 3000K, 4000K, 6500K

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
LZP-8 - RD/SQ-CC	8W	800	WB	120	Ø150X22	Ø101	552
LZP-15-RD/SQ-CC	15W	1500	WB	120	Ø180X22	Ø152	630
LZP-22-RD/SQ-CC	22W	2200	WB	120	Ø240X22	Ø203	1068
LZP-8-RD/SQ-CC-SF	8W	800	WB	120	101X22	-	612
LZP-15-RD/SQ-CC-SF	15W	1500	WB	120	152 X22	-	720
LZP-22-RD/SQ-CC-SF	22W	2200	WB	120	203 X22	-	1116





PZP (POLY CARBONATE MATERIAL)



Power By : EDISON LED LED Colour : 3000K, 4000K, 6500K

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
PZP-8-RD/SQ	8W	800	WB	120	Ø150X22	Ø101	336
PZP-12-RD/SQ	12W	1200	WB	120	Ø180X22	Ø127	354
PZP-15-RD/SQ	15W	1500	WB	120	Ø180X22	Ø152	420
PZP-18-RD/SQ	18W	1800	WB	120	Ø240X22	Ø178	636
PZP-22-RD/SQ	22W	2200	WB	120	Ø240X22	Ø203	840
PZP-15-RD/SQ-SF	15W	1500	WB	120	152 X22	-	528
PZP-22-RD/SQ-SF	22W	2200	WB	120	203 X22	-	600



15MM BORDER

LZP-AS (ALUMINIUM)



Power By : EDISON LED LED Colour : 3000K, 4000K, 6500K

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
LZP-6-RD/SQ	6W	600	WB	120	Ø108X22	Ø101	384
LZP-8-RD/SQ	8W	800	WB	120	Ø150X22	Ø101	420
LZP-12-RD/SQ	12W	1200	WB	120	Ø180X22	Ø127	438
LZP-15-RD/SQ	15W	1500	WB	120	Ø180X22	Ø152	576
LZP-18-RD/SQ	18W	1800	WB	120	Ø240X22	Ø178	612
LZP-22-RD/SQ	22W	2200	WB	120	Ø240X22	Ø203	828



PZP-SF (POLY CARBONATE MATERIAL)

Power By : EDISON LED

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
PZP-8-RD/SQ-CC	8W	800	WB	120	Ø150X22	Ø101	408
PZP-15-RD/SQ-CC	15W	1500	WB	120	Ø180X22	Ø152	540
PZP-22-RD/SQ-CC	22W	2200	WB	120	Ø240X22	Ø203	960
PZP-8-RD/SQ-CC-SF	8W	800	WB	120	101 X22	-	480
PZP-15-RD/SQ-CC-SF	15W	1500	WB	120	152 X22	-	648
PZP-22-RD/SQ-CC-SF	22W	2200	WB	120	203 X22	-	1080



LZR (ALUMINIUM)



Power By : EDISON LED

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	DLP
LZR-12-RD/SQ	12W	1440	WB-BB	120	Ø100	723
LZR-18-RD/SQ	18W	2160	WB-BB	120	Ø150	1155
LZR-22-SQ	22W	2640	WB-BB	120	Ø195	1598
LZR-36-RD/SQ	36W	4320	WB	120	Ø220	1917



PZR (PLASTIC)



Power By : EDISON LED

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	DLP
PZR-8	8W	600	WB-BB	120	Ø100	348
PZR-15	15W	1200	WB-BB	120	Ø150	540
PZR-22	22W	1800	WB-BB	120	Ø195	702



LB 2X2 ALUMINIUM

Power By : EDISON LED



LED Colour : 3000K, 4000K, 6500K

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension	DLP
LB-36	36W	4320	WB	120	Ø609X600	3300
LB-48	48W	5760	WB	120	Ø609X600	3480



LB BACKLIGHT PLASTIC



Power By : EDISON LED LED Colour : 3000K, 4000K, 6500K

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension	DLP
LB-36	36W	4320	WB	120	Ø609X600	2376

ON ORDER 4PCS BOX PACKING



LB SURFACE BACKLIGHT



Power By : EDISON LED LED Colour : 3000K, 4000K, 6500K

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension	DLP
LB-36	36W	4320	WB	120	Ø609X600	2700

ON ORDER 4PCS BOX PACKING




PZP MOTION SENSOR CONCEAL

Power By : EDISON LED

0-50 & 0-100

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
PZPSN-15-SQ/RD	15W	1500	WB	120	Ø180X22	Ø152	1503
PZPSN-22-RD/SQ	22W	2200	WB	120	Ø240X22	Ø203	2196
PZPSNSF-15-SQ/RD	15W	1500	WB	120	152 X22	-	1450
PZPSNSF-22-RD/SQ	22W	2200	WB	120	203 X22	-	1750

ON ORDER 20PCS BOX PACKING

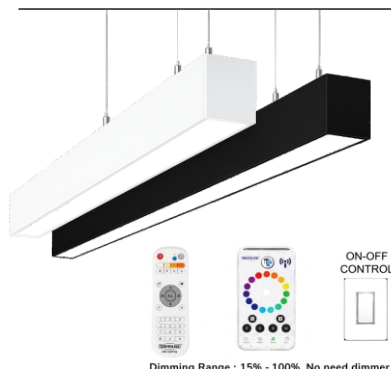

TPF-5070


Power By : BRIDGELUX LED



LED Colour : 3000K, 4000K, 6500K

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	DLP
TPF-5070-20	20W	2000	WB-BB	120	2 Ft x 50mm x 72mm	1630
TPF-5070-40	40W	4000	WB-BB	120	4 Ft x 50mm x 72mm	2800
TPF-5070-72	72W	7200	WB-BB	120	4 Ft x 50mm x 72mm	4590
TPF-5070-80	80W	7200	WB-BB	120	8 Ft x 50mm x 72mm	590
TPF-5070-40-CC	40W	4000	WB-BB/ 3 in 1	120	4 Ft x 50mm x 72mm	3115

Dimming Range : 15% - 100%, No need dimmer

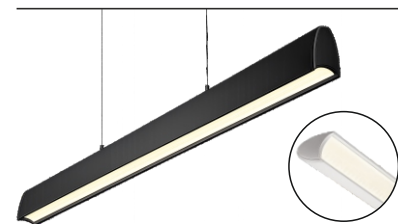

TPF-6090

Power By : BRIDGELUX LED



LED Colour : 3000K, 4000K, 6500K

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	DLP
TPF-6090-40	40W	1800	WB-BB	120	L1220XW62XH92mm	3900



HANGING STEEL WIRE (PAIR)

BOX PACKING

Model	Body Colour	Dimension	DLP
HG	STEEL	2 meter	250



20 PC BOX PACKING
MINIMUM ORDER 100 PC

PSF DOB



Power By : EDISON LED LED Colour : 3000K, 6500K

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension	DLP
PSF-8	8W	800	WB	120	1FT	302
PSF-12	12W	1200	WB	120	2FT	416
PSF-18	18W	1800	WB	120	3FT	610

BTT 3 In1



Power By : EDISON LED LED Colour : 3000K, 6500K

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension	DLP
BTT-36	36W	4680	WHITE	180	31X612X8	1250
BTT-72	72W	9360	WHITE	180	31X1224X8	1575

A Class of it's own...



LED Lighting



MAGNETIC TRACK LIGHTING

5mm, 11mm & 25mm



PROFILE LIGHT TILTABLE



Information

CRI: 90
Material: Aluminum
LED Type: SMD2835
Protection Class: IP20
CCT: 3000-6000K

COLOR



LED DC 40V IP20

WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	PRICE
12W	L230*W26*H24mm	DC48V	≥90	300K, 400K, 600K	2000
18W	3385*W26*H24mm	DC48V	≥90	300K, 400K, 600K	2880
30W	L555*W26*H24mm	DC48V	≥90	300K, 400K, 600K	3560



LINEA LIGHT TILTABLE



Information

CRI: 90
Material: Aluminum
LED Type: SMD2835
Protection Class: IP20
CCT: 3000-6000K

COLOR



LED DC 40V IP20

WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	PRICE
06W	L122*W26*H24mm	DC48V	≥90	300K, 400K, 600K	1560
12W	L230*W26*H24mm	DC48V	≥90	300K, 400K, 600K	2160
18W	L338*W26*H24mm	DC48V	≥90	300K, 400K, 600K	2800
24W	L445*W26*H24mm	DC48V	≥90	300K, 400K, 600K	2800



FODING PROFILE SMD LINEAR



Information

CRI: 90
Material: Aluminum
LED Type: SMD2835
Protection Class: IP20
CCT: 3000-6000K

COLOR



LED DC 40V IP20

WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	PRICE
12W	L230*W26*H80mm	DC48V	≥90	300K, 400K, 600K	3240



FOLDING LINEA LIGHT



Information

CRI: 90
Material: Aluminum
LED Type: SMD2835
Protection Class: IP20
CCT: 3000-6000K

COLOR



LED DC 40V IP20

WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	PRICE
06W	L122*W26*H80mm	DC48V	≥90	300K, 400K, 600K	2000
12W	L230*W26*H80mm	DC48V	≥90	300K, 400K, 600K	3280



TRACK LIGHT



Information

CRI: 90
Material: Aluminum
LED Type: SMD2835
Protection Class: IP20
CCT: 3000-6000K

COLOR



LED DC 40V IP20

WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	PRICE
06W	42*100mm	DC48V	≥90	300K, 400K, 600K	1860
10W	48*105mm	DC48V	≥90	300K, 400K, 600K	2800
20W	58*130mm	DC48V	≥90	300K, 400K, 600K	3640



DUAL TRACK LIGHT



Information

CRI: 90
Material: Aluminum
LED Type: SMD2835
Protection Class: IP20
CCT: 3000-6000K

COLOR



LED DC 40V IP20

WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	PRICE
6W+6W	45*100mm*2	DC48V	≥90	300K 400K 600K	4400



TERNARY LIGHT



Information

CRI: 90
Material: Aluminum
LED Type: SMD2835
Protection Class: IP20
CCT: 3000-6000K

COLOR



LED DC 40V IP20

WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	PRICE
06W	L122xW26xH55mm	DC48V	≥90	300K, 400K, 600K	3240



TRACK LINEA LIGHT



Information

CRI: 90
Material: Aluminum
LED Type: SMD2835
Protection Class: IP20
CCT: 3000-6000K

COLOR



LED DC 40V IP20

WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	PRICE
9W	95x30mm	DC48V	≥90	300K 400K 600K	3840



ADJUSTABLE SF CYLINDER



Information

CRI: 90
Material: Aluminum
LED Type: SMD2835
Protection Class: IP20
CCT: 3000-6000K

COLOR



LED DC 40V IP20

WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	PRICE
06W	W75*H75mm	DC48V	≥90	300K, 400K, 600K	3800




TRACK LINEA LIGHT



Information

CRI: 90
Material: Aluminum
LED Type: SMD2835
Protection Class: IP20
CCT: 3000-6000K

COLOR



LED DC 40V IP20

WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	PRICE
9W	Ø40*H300	DC48V	≥90	300K 400K 600K	3660




SMD PENDENT SOFT LIGHT



Information

CRI: 90
Material: Aluminum
LED Type: SMD2835
Protection Class: IP20
CCT: 3000-6000K

COLOR



LED DC 40V IP20

WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	PRICE
06W	100x100mm	DC48V	≥90	300K, 400K, 600K	4680




HOSE LIGHT



Information

CRI: 90
Material: Aluminum
LED Type: SMD2835
Protection Class: IP20
CCT: 3000-6000K

COLOR



LED DC 40V IP20

WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	PRICE
09W	L500mm	DC48V	≥90	300K, 400K, 600K	3520
16W	L1000mm	DC48V	≥90	300K, 400K, 600K	5240
32W	L2000mm	DC48V	≥90	300K, 400K, 600K	7760



SMD PENDENT EARTH LAMP



Information

CRI: 90
Material: Aluminum
LED Type: SMD2835
Protection Class: IP20
CCT: 3000-6000K

COLOR



LED DC 40V IP20

WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	PRICE
06W	150*150mm	DC48V	≥90	300K, 400K, 600K	4040




SMD PROFILE LIGHT



Information

CRI: 90
Material: Aluminum
LED Type: SMD2835
Protection Class: IP20
CCT: 3000-6000K

COLOR



LED DC 40V IP20

WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	PRICE
9W	300*26mm	DC48V	≥90	300K 400K 600K	2000

DRIVER



WATT	PRODUCT SIZE (MM)	PRICE
100W	Size:L210xW26xH24mm	3320
200W	Size:L310xW26xH24mm	4680

SLIM SURFACE CHANNEL



PRODUCT SIZE (MM)	PRICE
Size:L1000xW26xH6.3mm	1440
Size:L2000xW26xH6.3mm	2680

SLIM CONSEAL CHANNEL



PRODUCT SIZE (MM)	PRICE
Size:L1000xW56 6xH6.3mm	1440
Size:L2000xW56 6xH6.3mm	2680

DRIVER CABLE BOX




PRODUCT SIZE (MM)	PRICE
Size:L100xW26xH29mm	600

EXTERNAL DRIVER CONNECTOR



PRICE
1200

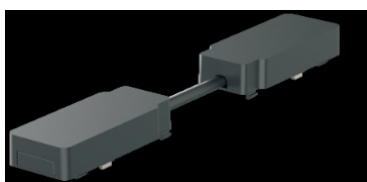

CONDUCTION
MODULE



PRICE
680



PRICE
600



PRICE
600



PRICE
920



PRICE
1000





Magnetic Flood light



Information

CRI: 90
Material: Aluminum
LED Type: SMD2835
Protection Class: IP20
CCT: 3000-6000K

COLOR



WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	DLP STANDARD	DLP RF	DLP ZIGBEE	DLP DALI DT8
10W	L200Wx10xH37mm	DC48V	≥90	300K, 400K, 600K	2340	4760	5800	10300
20W	L400Wx10xH37mm	DC48V	≥90	300K, 400K, 600K	3430	5775	6860	8800





Magnetic Grille light



Information

CRI: 90
Material: Aluminum
LED Type: SMD2835
Protection Class: IP20
CCT: 3000-6000K

COLOR



WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	DLP STANDARD	DLP RF	DLP ZIGBEE	DLP DALI DT8
12	L200Wx10xH37mm	DC48V	≥90	300K, 400K, 600K	2575	5000	6080	9050
24	L400Wx10xH37mm	DC48V	≥90	300K, 400K, 600K	3900	6240	6330	10300


Magnetic Floding grille light



Information

CRI: 90
Material: Aluminum
LED Type: SMD2835
Protection Class: IP20
CCT: 3000-6000K

COLOR



LED DC 40V IP20

WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	DLP STANDARD	DLP RF	DLP ZIGBEE	DLP DALI DT8
12W	18"W22"H95mm	DC48V	≥90	300K, 400K, 600K	4000	6700	7840	10850


Magnetic Spotlight



Information

CRI: 90
Material: Aluminum
LED Type: SMD2835
Protection Class: IP20
CCT: 3000-6000K

COLOR



LED DC 40V IP20

WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	DLP STANDARD	DLP RF	DLP ZIGBEE	DLP DALI DT8
6W	Ø33xL85mm	DC48V	≥90	300K, 400K, 600K	3500	5450	6517	9480
12W	Ø43xL110mm	DC48V	≥90	300K, 400K, 600K	4130	5900	7000	10000



Focusing magnetic track light *



Information

CRI: 90
Material: Aluminum
LED Type: SMD2835
Protection Class: IP20
CCT: 3000-6000K

COLOR



LED DC 40V IP20

WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	PRICE
07W	Φ35*H90mm	DC48V	≥90	300K, 400K , 600K	3400



Magnetic Square Track Light *



Information

CRI: 90
Material: Aluminum
LED Type: SMD2835
Protection Class: IP20
CCT: 3000-6000K

COLOR



LED DC 40V IP20

WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	PRICE
07W	64*64*44	DC48V	≥90	300K, 400K, 600K	3,520

10mm Magnetic Track Channel



Surface

Recessed


Length	Fixture size	Body color	Type	DLP
2 mtr	W55xL2000xH43mm	Black	Conceal	₹ 2650
2 mtr	W21xL2000xH43mm	Black	Surface	₹ 2650

Micro 150W driver



PRODUCT SIZE (MM) : 82*32
Price - 4090

Power	Size	Driver Specifications	Body color	Type	DLP
100W	200Lx10WxH37	48V 2.1A 100W	Black	Integrated	3700
200W	250Lx10WxH37	48V 4.2A 200W	Black	Integrated	5000

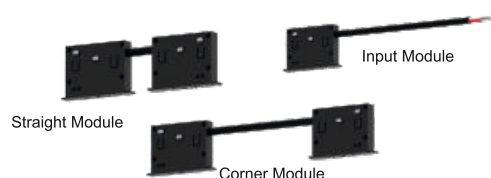

Straight Module

Corner Module

Module	Fixture size	Body color	Type	DLP
INPUT	L50xW10xH37mm	Black	Load Input	660
STRAIGHT	L120xW10xH37mm	Black	Connector	930
CORNER	L250xW10xH37mm	Black	Connector	1030


conceal horizontal connector

Price - 1000




surface horizontal connector

Price - 1000



25MM RECESSED MAGNETIC TRACK RAIL



Information

CRI: 90
Material: Aluminum
LED Type: SMD2835
Protection Class: IP20
CCT: 3000-6000K

COLOR




LED DC 40V IP20

PRODUCT SIZE (MM)	DESCRIPTION	PRICE
MG-TRACK-01-1M	POP CONSEAL-1 MTR	1320
MG-TRACK-01-2M	POP CONSEAL-2 MTR	2420
MG-TRACK-01-3M	POP CONSEAL-3 MTR	3465

25MM SURFACE MOUNTED /

PENDANT MOUNTED MAGNETIC TRACK RAIL

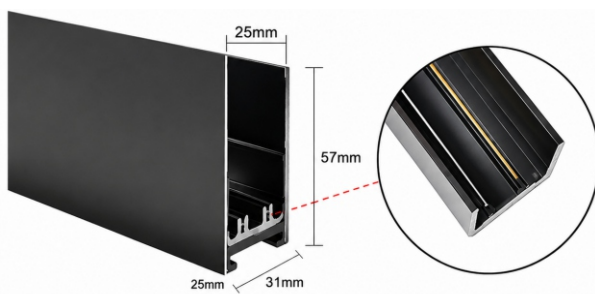

Surface Mounted/ Pendant Mounted

Information

CRI: 90
Material: Aluminum
LED Type: SMD2835
Protection Class: IP20
CCT: 3000-6000K

COLOR



LED DC 40V IP20

PRODUCT SIZE (MM)	DESCRIPTION	PRICE
MG-TRACK-01-1M	POP CONSEAL-1 MTR	1320
MG-TRACK-01-2M	POP CONSEAL-2 MTR	2420
MG-TRACK-01-3M	POP CONSEAL-3 MTR	3465



Magnetic Profile



Information

CRI: 90
Material: Aluminum
LED Type: SMD2835
Protection Class: IP20
CCT: 3000-6000K

COLOR



PRODUCT NAME	WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	Price
MG-PROFILE-12W	12W	L307*W22*H25mm	DC48V	≥90	300K, 400K, 600K	935
MG-PROFILE-20W	20W	L607*W22*H25mm	DC48V	≥90	300K, 400K, 600K	1375



MAGNETIC LINEAR RZR SPOTLIGHTS



Information

CRI: 90
Material: Aluminum
LED Type: SMD2835
Protection Class: IP20
CCT: 3000-6000K

COLOR



PRODUCT NAME	WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	Price
MG-RZR-LINEAR-06	6W	L110*W22*H80mm	DC48V	≥90	300K, 400K, 600K	935
MG-RZR-LINEAR-12	12W	L220*W22*H80mm	DC48V	≥90	300K, 400K, 600K	1045
MG-RZR-LINEAR-20	20W		DC48V	≥90	300K, 400K, 600K	1950




MAGNETIC LINEAR RZR MOVABLE SPOTLIGHTS



Information

CRI: 90
Material: Aluminum
LED Type: SMD2835
Protection Class: IP20
CCT: 3000-6000K

COLOR



PRODUCT NAME	WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	Price
MG-RZR-LINEAR-M-06	06W	L110*W22*H80mm	DC48V	≥90	300K, 400K, 600K	1420
MG-RZR-LINEAR-M-12	12W	L220*W22*H80mm	DC48V	≥90	300K, 400K, 600K	1685




MAGNETIC TRACK LIGHT



Information

CRI: 90
Material: Aluminum
LED Type: SMD2835
Protection Class: IP20
CCT: 3000-6000K

COLOR



PRODUCT NAME	WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	Price
MG-TRACK-10	10W	Φ48*H135	DC48V	≥90	300K, 400K, 600K	1842
MG-TRACK-20	20W	Φ48*H160	DC48V	≥90	300K, 400K, 600K	2365



MAGNETIC PENDANT LIGHT



Information

CRI: 90
Material: Aluminum
LED Type: SMD2835
Protection Class: IP20
CCT: 3000-6000K

COLOR



PRODUCT NAME	WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	Price
MG-PDL-06	06W	Φ30*H300	DC48V	≥90	300K, 400K, 600K	2150
MG-PDL-12	12W	Φ94*H300	DC48V	≥90	300K, 400K, 600K	2355




MAGNETIC L-CORNER



Information


CRI: 90
Material: Aluminum
LED Type: SMD2835
Protection Class: IP20
CCT: 3000-6000K

COLOR




PRODUCT NAME	WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	Price
MG-L-CORNER-10	10W	Φ48*H135	DC48V	≥90	300K, 400K, 600K	2100
MG-L-CORNER-20	20W	Φ48*H160	DC48V	≥90	300K, 400K, 600K	2570

MG-L-JOINTER

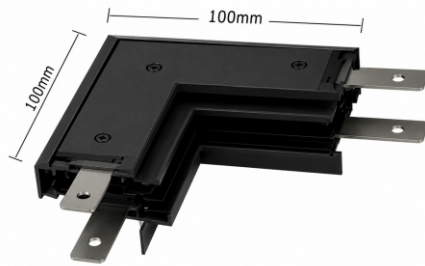


POP CONCEAL VERICAL CORNER
DLP - 650

MG-L-JOINTER

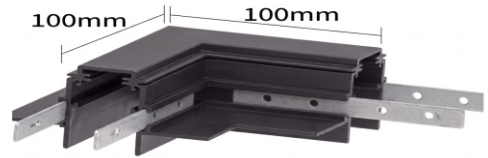


POP CONCEAL HORIZONTAL CORNER
DLP - 650

MG-L-JOINTER




REGULAR SURFACE
VERTICAL CORNER
DLP - 650

MG-L-JOINTER

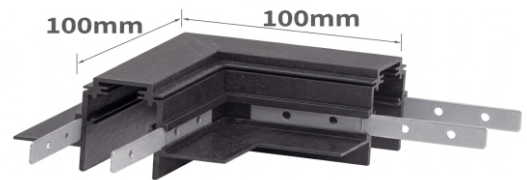


REGULAR SURFACE
HORIZONTAL CORNER
DLP - 650

MG-L-JOINTER

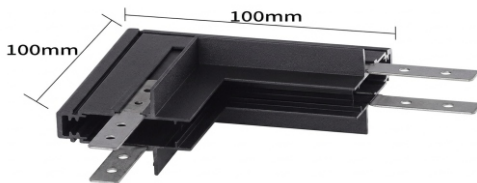

REGULAR SURFACE
VERTICAL CORNER
DLP - 650

MG-L-JOINTER

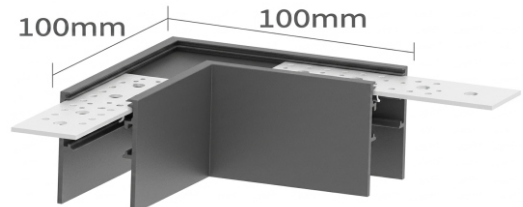

REGULAR SURFACE
HORIZONTAL CORNER
DLP - 650

MG-ENDCAP



R20 EMBEDDED
TRACK PLUG
DLP - 100

MG-ENDCAP



S20 SURFACE
TRACK PLUG
DLP - 100

MG-DRIVER-100W



LED Single color driver 100W
Heavy duty 100% power
DLP - 2320

MG-DRIVER-200W



LED Single color driver 200W
Heavy duty 100% power
DLP - 3530

MG-MODULE-CORNER-MOVABLE



CORNER CONDUCTIVE MODULE
DLP - 650

MG-MODULE-CONNECTOR-STATE



THROUGH CONDUCTIVE MODULE
DLP - 650

MG-INPUT-MODULE



SWITCHING POWER
INPUT MODULE
DLP - 330

MG-HANGING-WIRE




TRACK HANGING
WIRE BAG
DLP - 550

MG -SURFACE TRACK PENDANT ACCESSORY



2 PIECES
DLP - 1000


CURTAIN GRAZER / WALL GRAZER

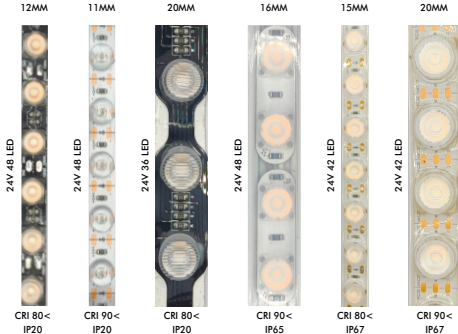

Item Code	LED(PM)	PCB Size	Power P/M	Colour	Lumen	CRI	DLP Per Metre
3030 - 24V	48	12 MM	18 Watt	4K,3K	30°	2 Led	1210
2835 - 24V	48	11 MM	25 Watt	4K,2700K,3CCT	180°	2 Led	530
3030 - 24V	36	20 MM	15 Watt	RGB+WW	30°	6 Led	3070
2835 - 24V	48	16 MM	16.5 Watt	4K,3K	30°	2 Led	2745
2835 - 24V	42	20 MM	24 Watt	3K,27K,3CCT	30°	1 Led	2665
2835 - 24V	42	15 MM	12 Watt	4K,3K,2700K	30°	2 Led	-

2835 - 12V LED STRIPS IP20


10 piece box packing

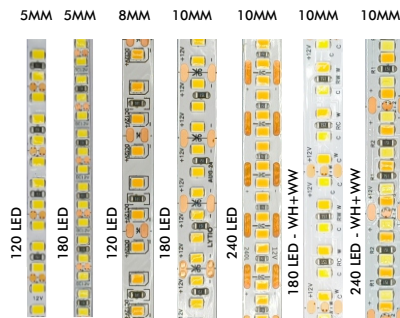

Item Code	LED(PM)	PCB Size	Power P/M	Colour	Lumen	CRI	DLP Per Metre
2835 - 12V	120	5 MM	10 Watt	65K,4K,3K	24-26LM	80<	145
2835 - 12V	180	5 MM	15 Watt	65K,4K,3K	24-26LM	80<	240
2835 - 12V	120	8 MM	10 Watt	65K,4K,3K	24-26LM	80<	145
2835 - 12V	180	10 MM	15 Watt	65K,4K,3K	24-26LM	80<	225
2835 - 12V	240 (2 Oz)	10 MM	18 Watt	65K,4K,3K	24-26LM	80<	260
2835 - 12V	240 (3 Oz)	10 MM	20 Watt	65K,4K,3K	24-26LM	80<	405
2835 - 12V	180	10 MM	15 Watt	3CCT	24-26LM	80<	305
2835 - 12V	240	10 MM	18 Watt	3CCT	24-26LM	80<	355


2835 - 24V LED STRIPS IP20

10 piece box packing

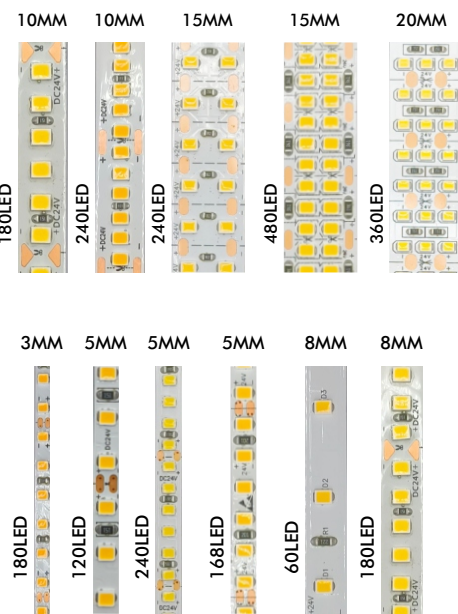


Item Code	LED(PM)	PCB Size	Power P/M	Colour	Lumen	CRI	DLP Per Metre
2020 - 24V	180	3 MM	7 Watt	4K,3K	24-26LM	80<	
2835 - 24V	120	5 MM	10 Watt	5K,4K,3K,27K	24-26LM	80<	305
2835 - 24V	120	5 MM	10 Watt	4K,3K,27K,3K	24-26LM	80<	355
2025 - 24V	240	5 MM	11 Watt	65K, 4K,3K	24-26LM	80<	565
2835 - 24V	168	5 MM	12 Watt	65K,4K,3K	24-26LM	80<	355
2835 - 24V	120	8 MM	5 Watt	3K	24-26LM	80<	370
2835 - 24V	120	8 MM	10 Watt	65K,5K,4K,3K 35K,27K	24-26LM	80<	340
2835 - 24V	120 (E SERIES)	8 MM	12 Watt	4K,3K	24-26LM	80<	240
2835 - 24V	180 (E SERIES)	8 MM	15 Watt	65K,4K,3K	24-26LM	80<	355
2835 - 24V	60	8 MM	6 Watt	65K,4K,3K	24-26LM	80<	225
2835 - 24V	120	8 MM	10 Watt	4K,3K,27K,3K	24-26LM	80<	355
2835 - 24V	120 20MTR ROLL	10 MM	12 Watt	4K,3K	24-26LM	80<	970
2835 - 24V	180	10 MM	15 Watt	65K,4K,3K,27K	24-26LM	80<	435
2835 - 24V	240 (E SERIES)	10 MM	22 Watt	65K,4K,3K	24-26LM	80<	-
2835 - 24V	240	10 MM	20 Watt	65K,5K,4K,3K 35K,27K	24-26LM	80<	485
2835 - 24V	240	10 MM	22 Watt	4K,3K,27K,3K	24-26LM	80<	500
2835 - 24V	240 (2 LINE)	15 MM	12 Watt	65K,4K,3K	24-26LM	80<	805
2835 - 24V	480 (2 LINE)	15 MM	23 Watt	65K,4K,3K	24-26LM	80<	1290
2835 - 24V	360 (3 LINE)	20 MM	26 Watt	4K,27K	24-26LM	80<	1080

2835 - HIGH CRI LED STRIP (IP 20)

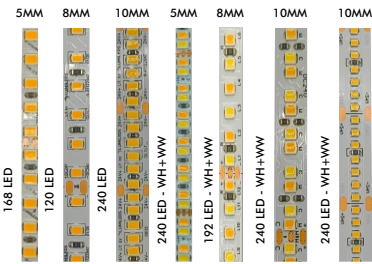


Item Code	LED(PM)	PCB Size	Power P/M	Colour	Lumen	CRI	DLP Per Metre
2835 - 24V	168	5	10 Watt	6K,4K,3K,27K	22-24LM	92<	500
2835 - 24V	120	8	12 Watt	6K,4K,3K,27K	22-24LM	92<	405
2216 - 24V	240	10	18 Watt	6K,4K,3K,27K	22-24LM	92<	645
2835 - 24V	240	5	10 Watt	WH+WW	22-24LM	92<	-
2835 - 24V	192	8	18 Watt	WH+WW	22-24LM	92<	550
2835 - 24V	240	10	20 Watt	WH+WW	22-24LM	92<	550
2216 - 24V	280	10	22 Watt	4K,3K	20-22LM	92<	

RGB & CCT LED STRIPS (IP 20)

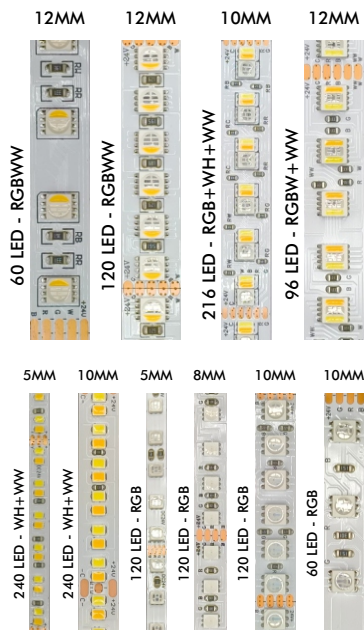

Item Code	LED(PM)	PCB Size	Power P/M	Colour	Lumen	CRI	DLP Per Metre
2025 - 24V	240	5 MM	12 Watt	3CCT (WH+WW)	24-26LM	80<	530
2835 - 24V	120	8 MM	12 Watt	3CCT (2in1)	24-26LM	80<	550
2835 - 24V	240	10 MM	20 Watt	3CCT (WH+WW)	24-26LM	80<	550
2835 - 24V	240	10 MM	15 Watt	22K-4K CCT	24-26LM	80<	550
2835 - 24V	120	5 MM	16.8 Watt	R.G.B.	24-26LM	80<	760
3535 - 24V	120	8 MM	18 Watt	R.G.B.	24-26LM	80<	645
5050 - 24V	60	10 MM	12 Watt	R.G.B.	24-26LM	80<	500
5050 - 24V	120	10 MM	12 Watt	R.G.B.	24-26LM	80<	-
5050 - 24V	60	12 MM	18 Watt	R.G.B.+WW	24-26LM	80<	725
5050 - 24V	120	12 MM	12 Watt	R.G.B.+WW	24-26LM	80<	1275
5050 - 24V	60	12 MM	18 Watt	RGB+WH	24-26LM	80<	725
3535 - 24V	216	10 MM	20 Watt	RGB+WH+WW	24-26LM	80<	1275
5050 - 24V	60	12 MM	18 Watt	RGB+WH+WW	24-26LM	80<	725
5050 - 24V	96	12 MM	24 Watt	RGB+WH+WW	24-26LM	80<	1615

COB LED STRIP - DOTLESS - 90 CRI (Ip20)

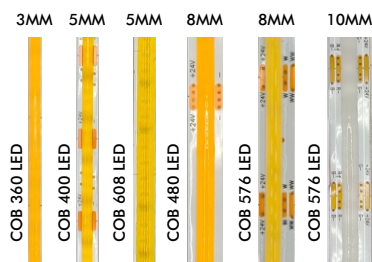

Item Code	LED(PM)	PCB Size	Power P/M	Colour	Lumen	CRI	DLP Per Metre
COB - 24V	360	3 MM	7 Watt	2700K	22-24LM	90<	530
COB - 24V	400	5 MM	10 Watt	4K,3K	22-24LM	90<	565
COB - 24V	608	5 MM	5 Watt	CCT Tunable	24-26LM	90<	970
COB - 24V	480	8 MM	12 Watt	4K,3K,2700K	22-24LM	90<	600
COB - 24V	576	8 MM	12 Watt	CCT Tunable	22-24LM	90<	1210
COB - 24V	576	10 MM	18 Watt	R.G.B.	22-24LM	90<	1535



STDM

Power By : **OSRAM LED**

Model	Watt	Lumens	Body Colour	IP Rating	Beam'Angle	Dimension (mm)	DLP
STDM-100	100W	13000	GRAY	65	120	390X95X100	-
STDM-200	200W	26000	GRAY	65	120	390X200X100	-
STDM-500	500W	65000	GRAY	65	120	390X510X100	-
STDM-1000	1000W	130000	GRAY	65	120	780X510X100	-

FD GL

Power By : **OSRAM LED**

ON ORDER: **GREEN, RED & BLUE** (ADDITIONAL CHARGES AS PER WATT)

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	Dimension (mm)	DLP
FD-GL-36	36W	390	GRAY	65	120	120X140X32	1400
FD-GL-50	50W	6500	GRAY	65	120	220x215x60	1487
FD-GL-100	100W	13000	GRAY	65	120	280x270x60	2502
FD-GL-150	150W	19500	GRAY	65	120	320x310x60	3710
FD-GL-200	200W	26000	GRAY	65	120	320x310x60	4830
FD-GL-250	250W	32500	GRAY	65	120	320x310x60	5950
FD-GL-300	300W	39000	GRAY	65	120	462X500X70	7612
FD-GL-400	400W	52000	GRAY	65	120	462X500X70	9835



FL DOB

Power By : **BRIDGELUX**

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	Dimension (mm)	DLP
FL-DOB-50	50W	6500	GRAY	65	120	185X145	1370
FL-DOB-100	100W	13000	GRAY	65	120	240X185	2100



SL GL

Power By : **OSRAM LED**

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	Dimension (mm)	DLP
SL-36	36W	4680	GRAY	65	120	128x355	1160
SL-50	50W	6500	GRAY	65	120	160x375	1450
SL-72	72W	13000	GRAY	65	120	220x510	2100
SL-100	100W	19500	GRAY	65	120	220x510	2390
SL-150	150W	19500	GRAY	65	120	220x510	4060
SL-200	200W	19500	GRAY	65	120	220x510	5070



SL SOLAR

Power By : **BRIDGELUX**

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	Dimension (mm)	DLP
SLSR-60	60W	7200	GRAY	65	90/120	-	3140
SLSR-120	120W	9600	GRAY	65	90/120	-	4025
SLSR-180	180W	12000	GRAY	65	90/120	-	4900



UFO HB

Power By : **OSRAM LED**

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	Dimension (mm)	DLP
UFO-50	50W	6500	GRAY	65	120	310x220	3001
UFO-100	100W	13000	GRAY	65	120	310x220	4433
UFO-150	150W	19500	GRAY	65	120	360x220	5393
UFO-200	200W	26000	GRAY	65	120	310x220	6187



ALUMINIUM DOME
Rs. 300 EXTRA

HB UFO FLAMMABLE IP 65

Power By : **BRIDGELUX**

SAUCER WELL GLASS LIGHT (HEAVY WEIGHT)

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	Dimension (mm)	DLP
UFO-FL-60	60W	7200	GRAY	65	90/120		11051
UFO-FL-80	80W	9600	GRAY	65	90/120		12488
UFO-FL-100	100W	12000	GRAY	65	90/120		13983






A Class of it's own...



LED Lighting

LED WALL LAMPS & MIRROR LIGHTS

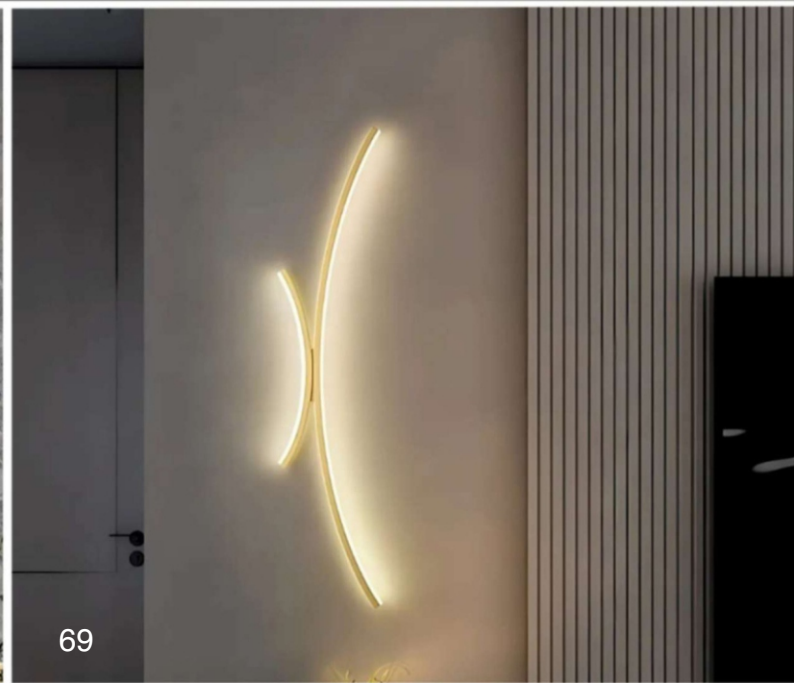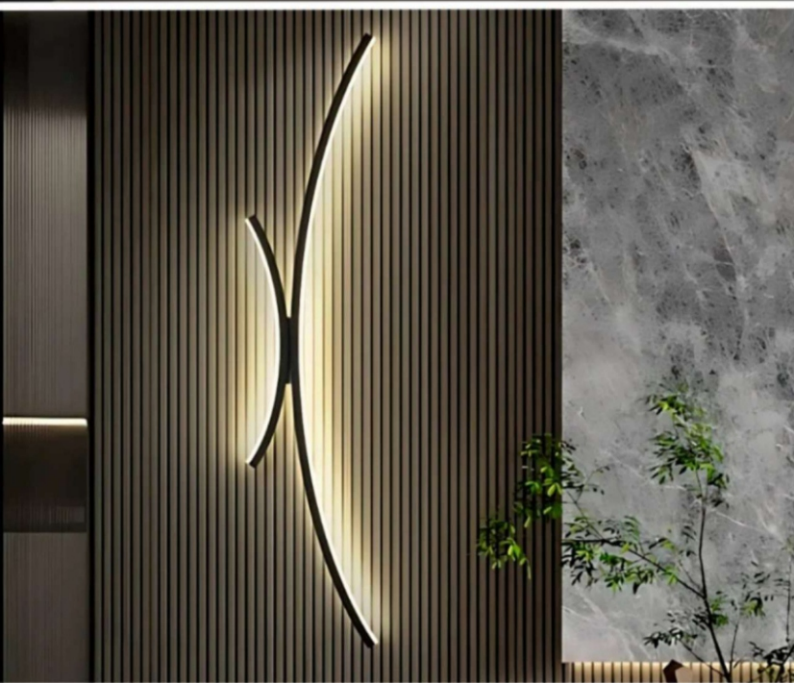



WL

Power By : **TEEN LED**

Model	Watt	Dimension(mm)	DLP
WL-199	10W	H:240	1632

LED Colour : 4000K/3000K




WL

Power By : **TEEN LED**

Model	Watt	Dimension(mm)	DLP
WL-200	10W	H:240	1632

LED Colour : 4000K/3000K




WL

Power By : **TEEN LED**

Model	Watt	Dimension(mm)	DLP
WL-201	10W	H:240	1632

LED Colour : 4000K/3000K



WL

Power By : **TEEN LED**

Model	Watt	Dimension(mm)	DLP
WL-202	10W	H:240	1632

LED Colour : 4000K/3000K



WL

Power By : **TEEN LED**

Model	Watt	Dimension(mm)	DLP
WL-203	10W	H:240	1632

LED Colour : 4000K/3000K




WL

Power By : **TEEN LED**

Model	Watt	Dimension(mm)	DLP
WL-204	10W	H:240	1632

LED Colour : 4000K/3000K




WL

Power By : **TEEN LED**

Model	Watt	Dimension(mm)	DLP
WL-205	12W	H:600	2052

LED Colour : 4000K/3000K




WL

Power By : **TEEN LED**

Model	Watt	Dimension(mm)	DLP
WL-206	18W	H:600	2130

LED Colour : 4000K/3000K




WL

Power By : **TEEN LED**

Model	Watt	Dimension(mm)	DLP
WL-207	20W	H:600	2130

LED Colour : 4000K/3000K




WL

Power By : **TEEN LED**

Model	Watt	Dimension(mm)	DLP
WL-208	24W	H:600	2130

LED Colour : 4000K/3000K




WL

Power By : **TEEN LED**

Model	Watt	Dimension(mm)	DLP
WL-209	24W	H:600	2130

LED Colour : 4000K/3000K




WL

Power By : **TEEN LED**

Model	Watt	Dimension(mm)	DLP
WL-210	24W	H:600	2130

LED Colour : 4000K/3000K



WL

Power By : **TEEN LED**

Model	Watt	Dimension(mm)	DLP
WL-211	16W	H:600	2004

LED Colour : 4000K/3000K




WL

Power By : **TEEN LED**

Model	Watt	Dimension(mm)	DLP
WL-212	12W	H:600	1878

LED Colour : 4000K/3000K



WL

Power By : TEEN LED

Model	Watt	Dimension(mm)	DLP
WL-213	16W	H:600	1878

LED Colour : 4000K/3000K



WL

Power By : TEEN LED

Model	Watt	Dimension(mm)	DLP
WL-214	16W	H:600	2052

LED Colour : 4000K/3000K




WL

Power By : TEEN LED

Model	Watt	Dimension(mm)	DLP
WL-215	24W	H:900	2202

LED Colour : 4000K/3000K



WL

Power By : TEEN LED

Model	Watt	Dimension(mm)	DLP
WL-284	6W	H:240	1800

LED Colour : 4000K/3000K



WL

Power By : TEEN LED

Model	Watt	Dimension(mm)	DLP
WL-266	20W	H:240	2454

LED Colour : 4000K/3000K



WL

Power By : TEEN LED

Model	Watt	Dimension(mm)	DLP
WL-272	15W	H:240	1944

LED Colour : 4000K/3000K



WL

Power By : TEEN LED

Model	Watt	Dimension(mm)	DLP
WL-274	20W	H:240	2478

LED Colour : 4000K/3000K



WL

Power By : TEEN LED

Model	Watt	Dimension(mm)	DLP
WL-276	15W	H:600	2130

LED Colour : 4000K/3000K



WL

Power By : TEEN LED

Model	Watt	Dimension(mm)	DLP
WL-278	18W	H:600	2004

LED Colour : 4000K/3000K



WL

Power By : TEEN LED

Model	Watt	Dimension(mm)	DLP
WL-292	24W	H:600	1878

LED Colour : 4000K/3000K



BLACK
WHITE
ROYALBLUE
ROSE GOLD
GOLD
BRONZE

WL

Power By : TEEN LED

Model	Watt	Dimension(mm)	Body Color	DLP
WL-294	18W	H:460	WB-BB	1632
WL-294	18W	H:460	RB-GL-RG BRONZE	1752

LED Colour : 4000K/3000K 10 PCS box packing



WL

Power By : TEEN LED

Model	Watt	Dimension(mm)	DLP
WL-290	20W	H:240	2880

LED Colour : 4000K/3000K



PML10CC

Model	Watt	Dimension(mm)	DLP
PML-10-CC	10W	2 Ft x 50mm x 72mm	-

LED Colour : 4000K/3000K



WL

Power By : TEEN LED


Model	Watt	Dimension(mm)	DLP
WL-650	10W	190x291	1380

LED Colour : 4000K/3000K

A Class of it's own...



LED Lighting

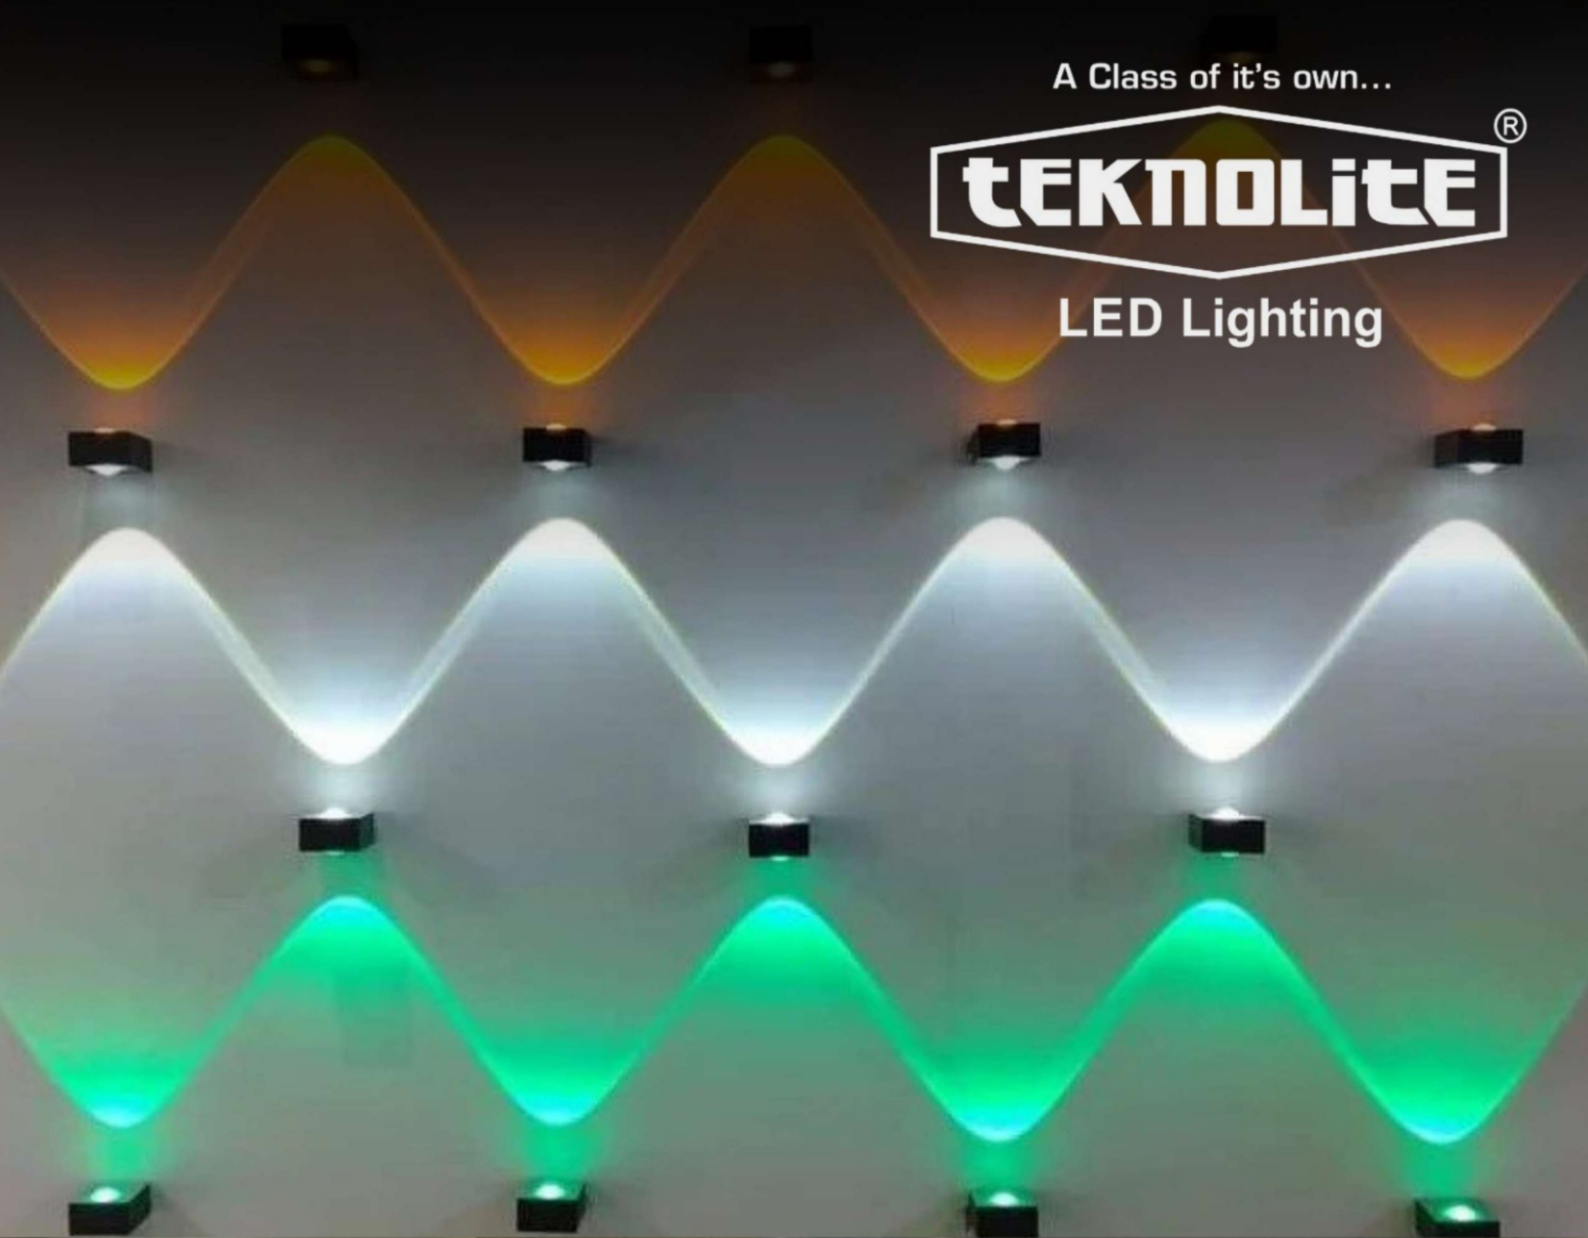

OUTDOOR IP65 WATERPROOF

Aluminum lamp body, outdoor effective
waterproof rain seamless access

LED GATE LIGHTS

— POLY CARBONATE HOUSING —



ROYAL

Wattage : 20W

Color : W/WW

DLP : ₹1945/-



LOBINI

Wattage : 30W

Color : W/WW

DLP : ₹2815/-



ZEN

Wattage : 20W

Color : W/WW

DLP : ₹1560/-



FOTON

Suitable for LED Bulb

Color : W

DLP : ₹950/-



ORA

Wattage : 20W

Color : W/WW

DLP : ₹1375/-



ALPINA

Wattage : 20W

Color : w/ww

DLP : ₹1500/-



ACURA

Wattage : 20W

Color : w/ww

DLP : ₹2500/-



KEERA

Wattage : 20W

Color : w/ww

DLP : ₹2250/-



MOON

Suitable for LED Bulb

Color : W

DLP : ₹1125/-



OBH

Power By : **TEEN**

LED Colour : 3000K

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	DLP
OBH - 10	10W	1200	WHITE	65	120	230
OBH - 20	20W	2400	WHITE	65	120	320



PENTA-10

Power By : **TEEN**

LED Colour : 3000K

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	Dimensions (mm)	DLP
PENTA-10	10W	1200	WHITE	65	120	170X6845	400



GL 115

Power By : **TEEN**

LED Colour : 3000K, 4000K

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	DLP
GL-115	5W	1200	BLACK	65	120	690
GL-165	10W	1000	BLACK	65	120	810



ODL

Power By : **TEEN**

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	Dimensions (mm)	DLP
ODL-452 (TWO WAY)	3W	250	GRAY/ BLACK	65	45	80x60x35	570



ODL

Power By : **TEEN**

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	Dimensions (mm)	DLP
ODL-452/2 (FOUR WAY)	5W	345	GRAY/ BLACK	65	45	80x110x35	820



ODL

Power By : **TEEN**

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	Dimensions (mm)	DLP
ODL-452/3 (SIX WAY)	7W	455	GRAY/ BLACK	65	45	80x160x35	1090



ODL

Power By : **TEEN**

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	Dimensions (mm)	DLP
ODL-452/4 (EIGHT WAY)	10W	960	GRAY/ BLACK	65	45	80x210x35	1488




ODL

Power By : **TEEN**

LED Colour : 3000K

Dimension (mm)

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL104S	3W	GRAY	65	80	696
ODL104	6W	GRAY	65	80	768





ODL


Power By : **TEEN** LED



Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL-103S	2x3W	GRAY	65	80	838
ODL-103	2x6W	GRAY	65	80	958

LED Colour : 3000K

Dimension (mm)



ODL


Power By : **EDISON** LED



Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL-419	3W	GRAY	65	45	800
ODL-419	6W	GRAY	65	45	1110

LED Colour : 3000K

Dimension (mm)




ODL

Power By : **EDISON** LED



Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL-454	10W	GRAY	65	110	1070

LED Colour : 3000K



ODL


Power By : **TEEN** LED



Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL-415	7W	GRAY	65	90	1137

LED Colour : 3000K

Dimension (mm)



ODL


Power By : **EDISON** LED



Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL-416	3W	GRAY	65	45	730

LED Colour : 3000K

Dimension (mm)



ODL


Power By : **TEEN** LED



Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL-453	10W	BLACK	65	60	1160

LED Colour : 3000K

Dimension (mm)



ODLS


Power By : **TEEN** LED



Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL-438S	4W	WB-GRAY	65	45	828

LED Colour : 3000K

Dimension (mm)



PWL

Power By : **TEEN** LED



Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
PWL-440	2W	WB-GRAY	65	45	310

LED Colour : 3000K

Dimension (mm)




ODL

Power By : **TEEN** LED



LED Colour : 3000K

Dimension (mm)



Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL-438	8W	WB-GRAY	65	45	880




ODL

Power By : **TEEN** LED



LED Colour : 3000K

Dimension (mm)



Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL-466	6W	GRAY	65	45	900




ODL

Power By : **EDISON** LED



LED Colour : 3000K

Dimension (mm)



Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL-467	4W	GRAY	65	55	960
ODL-467	6W	GRAY	65	55	1080




ODL

Power By : **EDISON** LED




LED Colour : 3000K

Dimension (mm)



Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL-455	6W	WB-GRAY	65	45	910




ODL

Power By : **EDISON** LED



LED Colour : 3000K

Dimension (mm)



Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL-456	3W	WB-GRAY	65	45	730




ODL

Power By : **EDISON** LED



LED Colour : 3000K

Dimension (mm)



Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL-445	5W	WB-GRAY	65	45	848
ODL-445	12W	WB-GRAY	65	45	1248
(2 LEG)-ODL-445-S	3W	WB GRAY	65	45	792




ODLS

Power By : **EDISON** LED



LED Colour : 3000K

Dimension (mm)



Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL-464S (One leg)	1W	WB-GRAY	65	45	520




ODL

Power By : **EDISON** LED



LED Colour : 3000K

Dimension (mm)



Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL-464	3W	WB-GRAY	65	45	585




ODL

Power By : **EDISON** LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL-425-2	5W	GRAY	65	45	882
ODL-425-3	7W	GRAY	65	45	1002

LED Colour : 3000K

Dimension (mm)




ODL

Power By : **TEEN** LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL-426-1	3W	GRAY	65	45	960

LED Colour : 3000K

Dimension (mm)




ODL

Power By : **EDISON** LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL-426-2	5W	GRAY	65	45	1020

LED Colour : 3000K

Dimension (mm)




ODL

Power By : **EDISON** LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL-426-3	7W	GRAY	65	45	1140

LED Colour : 3000K

Dimension (mm)




ODL

Power By : **EDISON** LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL-423	4W	GRAY	65	45	911

LED Colour : 3000K

Dimension (mm)




ODL

Power By : **EDISON** LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL-475	5W	GRAY	65	45	900

LED Colour : 3000K

Dimension (mm)




ODL

Power By : **EDISON** LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL-405	10W	GRAY	65	120	830
ODL-406	16W	GRAY	65	120	945

LED Colour : 3000K

Dimension (mm)







ODL

Power By : EDISON LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL-431	16W	GRAY	65	360	1999

LED Colour : 3000K

Dimension (mm)




ODL

Power By : EDISON LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL-450	14W	RD / SG	65	360	1999

LED Colour : 3000K

Dimension (mm)




ODL

Power By : EDISON LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL-474/1	1W	Black+Gold	65	25	660

LED Colour : 3000K

Dimension (mm)




ODL

Power By : EDISON LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL-474/2	2W	Black+Gold	65	25	811

LED Colour : 3000K

Dimension (mm)




ODL

Power By : EDISON LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL-474/3	3W	Black+Gold	65	25	964

LED Colour : 3000K

Dimension (mm)




ODL

Power By : EDISON LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL-474/Y	4W	Black+Gold	65	25	1116

LED Colour : 3000K

Dimension (mm)




ODL

Power By : EDISON LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL-474/X	4W	Black+Gold	65	25	1116

LED Colour : 3000K

Dimension (mm)






ODL 474/4

Power By : EDISON LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL-474/4	4W	Black+Gold	65	25	1116

LED Colour : 3000K

Dimension (mm)





ODL 474/5

Power By : EDISON LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL - 474/5	5W	Black+Gold	65	25	1295

LED Colour : 3000K

Dimension (mm)




ODL 474/6

Power By : EDISON LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL - 474/6	6W	Black+Gold	65	25	1421

LED Colour : 3000K

Dimension (mm)





ODL 474/8

Power By : EDISON LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL - 474/8	8W	Black+Gold	65	25	1650

LED Colour : 3000K

Dimension (mm)




ODL 4094

Power By : EDISON LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL-4094	4W	Black	65	50	1010

LED Colour : 3000K



ODL 409/8

Power By : EDISON LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL - 409/8	8W	Black	65	50	1282

LED Colour : 3000K




ODL 409/12

Power By : EDISON LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL - 409/12	12W	Black	65	50	1584

LED Colour : 3000K




ODL 445/ LENS

Power By : TEEN

LED



Model	Watt	Body	IP Rating	Beam Angle	DLP
ODL-445/L	5W	Black/ Grey	65	25	990




ODL 407

Power By : EDISON

LED



Model	Watt	Body	IP Rating	Beam Angle	DLP
ODL-407	2W	Black	65	75	904



ODL 408

Power By : EDISON

LED



Model	Watt	Body	IP Rating	Beam Angle	DLP
ODL-408	2W	Black	65	50	904



OFL


Power By : EDISON

LED



LED Colour : 2700 to 6500K

Dimension (mm)



Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
OFL-101	4W	GRAY	65	100	790



OFL

Power By : EDISON

LED




LED Colour : 2700 to 6500K

Dimension (mm)



Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
OFL-102	6W	GRAY	65	100	1010



OFL


Power By : EDISON

LED



LED Colour : 2700 to 6500K

Dimension (mm)



Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
OFL-727	5W	GRAY	65	100	585



FL-SENSOR


Power By : EDISON

LED



LED Colour : 2700 to 6500K

Dimension (mm)



Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
FL-0103-SQ-MON	3W	WB-BB-GB	65	100	1000
FL-0103-SQ	3W	WB-BB-GB	65	100	780
FL-0103-RD-MON	3W	WB-BB-GB	65	100	1000
FL-0103-RD	3W	WB-BB-GB	65	100	780



OCL


Power By : EDISON

LED



LED Colour : 3000K

Dimension (mm)



Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	DLP
OCL-201	5W	500	WB-BB	65	100	436




OFL

Power By : EDISON LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
OFL - 730	5W	WB-GRAY	65	100	530

LED Colour : 3000K

Dimension (mm)




OFL

Power By : EDISON LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
OFL - 723	3W	WB-GRAY	65	90	556

LED Colour : 3000K

Dimension (mm)




OFL

Power By : EDISON LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
OFL - 103	5W	GRAY	65	100	560

LED Colour : 3000K

Dimension (mm)




OFL

Power By : EDISON LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
OFL - 702	8W	GRAY	65	100	675

LED Colour : 3000K

Dimension (mm)




OFL

Power By : EDISON LED

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	DLP
OFL-105-9	9W	900	GRAY	65	100	1056

LED Colour : 3000K

Dimension (mm)



ODL0402

Power By : EDISON LED

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	DLP
ODL-0402	6W	780	BLACK	65	100	875

LED Colour : 3000K

Dimension (mm)



ODL0602

Power By : EDISON LED

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	DLP
ODL-0602	8W	1040	BLACK	65	100	938

LED Colour : 3000K

Dimension (mm)



FLORA


Power By : EDISON LED



LED Colour : 3000K

Dimension (mm)

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	DLP
FLORA-2	2W	260	BLACK	65	100	700



OPAL2

Power By : EDISON LED



LED Colour : 3000K

Dimension (mm)

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	DLP
OPAL-2	2W	260	BLACK	65	100	290



ARIES

Power By : EDISON LED



LED Colour : 3000K

Dimension (mm)

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	DLP
ARIES-3	3W	390	BLACK	65	100	290



LIME

Power By : EDISON LED



LED Colour : 3000K

Dimension (mm)

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	DLP
LIME-3	3W	390	BLACK	65	100	265



FLOAT


Power By : EDISON LED



LED Colour : 3000K

Dimension (mm)

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	DLP
FLOAT-3	3W	390	BLACK	65	100	265



ODL570

Power By : EDISON LED



LED Colour : 3000K

Dimension (mm)

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	DLP
ODL-570	8W	1040	BLACK	65	100	1125



ODL560

Power By : EDISON LED



LED Colour : 3000K

Dimension (mm)

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	DLP
ODL-560	6W	780	BLACK	65	100	938



GEO4

Power By : EDISON LED

POLY-CARBONATE

LED Colour : 3000K
Dimension (mm)

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	DLP
GEO-4	4W	520	BLACK	65	100	400



OPAL4

Power By : EDISON LED

POLY-CARBONATE

LED Colour : 3000K
Dimension (mm)

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	DLP
OPAL-4	4W	520	BLACK	65	100	490




FSD

Power By : TEEN LED



LED Colour : 3000K

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	DLP
FSD-212	12W	1440	GRAY	65	5/10	1265
FSD-218	18W	2160	GRAY	65	5/10	1552
FSD-1824	24W	2880	GRAY	65	5/10	2100
FSD-212-RGB	12W	1440	R-G-B	65	5/10	2118



FSD - SQ

Power By : TEEN LED



Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	Dimension	DLP
FSD0-24	24W	2880	GRAY	65	5/10	100x165x85	6418
FSD0-24-HOOD	24W	2880	GRAY	65	5/10	100x165x85	6545



ASK

Power By : TEEN LED

Model	Watt	Dimension (mm)	DLP
ASK-004	36	400X300	ON ORDER
ASK-004	50	400X300	ON ORDER

LED Colour : 3000K



ASK

Power By : TEEN LED

Model	Watt	Dimension (mm)	DLP
ASK-005	36	475X200	ON ORDER
ASK-005	50	475X200	ON ORDER

LED Colour : 3000K



ASK

Power By : TEEN LED

Model	Watt	Dimension (mm)	DLP
ASK 006	36X2	400X2X300	ON ORDER
ASK 006	50X2	400X2X300	ON ORDER

LED Colour : 3000K

ALL MODELS 10 PC BOX PACKING



SK


Power By : TEEN LED

Model	Watt	Lumens	Body Colour	LED Colour	IP Rating	Beam Angle	DLP
SK11-6	6W	600	BB-GRAY	3000K	65	36	587
SK-11-R/G/B	6W	600	BB-GRAY	RGBRGB	65	36	636
SK-11	8W	960	BB-GRAY	3000K	65	36	710

R | G | B

LED Colour : 3000K

Dimension (mm)




SK

Power By : TEEN LED

Model	Watt	Lumens	Body Colour	LED Colour	IP Rating	Beam Angle	DLP
SK-16	6W	600	BB	3000K	65	48	698
SK16-8	8W	960	BB	3000K	65	48	860

LED Colour : 3000K

Dimension (mm)




SK

Power By : TEEN LED

Model	Watt	Lumens	Body Colour	LED Colour	IP Rating	Beam Angle	DLP
SK-8	8W	960	BB	3000K	65	48	1197
SK8-12	12W	1440	BB	3000K	65	48	1320
SK8-20	20W	1800	BB	3000K	65	48	1616

LED Colour : 3000K


Dimension (mm)



SK

Model	Holder	Body Colour	IP Rating	DLP
SK08/BH	GU10	BB	65	756

Dimension (mm)




SK

Power By : TEEN LED

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	MRP
SK-712	12W	1440	BB	65	25-38	1320

LED Colour : 3000K

Dimension (mm)




SK

Power By : TEEN LED

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	MRP
SK-0207	7W	720	GRAY	65	54	1260
SK-0212	12W	1440	GRAY	65	54	1848
SK-0215	15W	1800	GRAY	65	54	2220

LED Colour : 3000K

Dimension (mm)





BOLARD

Model	Watt	Lumens	Body Colour	LED Colour	IP Rating	BATTERY	SOLAR PANEL	DLP
SL-BLR-RD	3W	100	BB	WW	65	1500mah	1.3W	
SL-BLR-SQ	3W	100	BB	WW	65	1500mah	1.3W	



GATE LIGHT

Model	Watt	Lumens	Body Colour	LED Colour	IP Rating	BATTERY	SOLAR PANEL	DLP
SL-GL-RD	3W	100	BB	WW	65	1500mah	1.3W	
SL-GL-SQ	3W	100	BB	WW	65	1500mah	1.3W	



SPIKE LIGHT

Model	Watt	Lumens	Body Colour	LED Colour	IP Rating	BATTERY	SOLAR PANEL	DLP
SL-SPK-WW	5W	100	BB	WW	65	1200mah	5W 2V	
SL-SPK-RGB	5W	100	BB	RGB	65	1200mah	5W 2V	





A Class of it's own...
TEKNOLITE[®]
 LED Lighting



TERMS

1. Request to all customers to give length sizes of pole and bollard in feet for accuracy.
2. 50% Advance payment at the time of P.O. & remaining before delivery.
3. Transportation and loading charge extra*.



BLL

Power By : **TEEN**

Model	Watt	Dimension (mm)	DLP
BLL-116	16W	300	ON ORDER
BLL-117	16W	600	ON ORDER

LED Colour : 3000K



BLL

Power By : **TEEN**

Model	Watt	Dimension (mm)	DLP
BLL-109	12W	300	ON ORDER

LED Colour : 3000K



BLL

Power By : **TEEN**

Model	Watt	Dimension (mm)	DLP
BLL-125	12W	300	ON ORDER

LED Colour : 3000K



BLL

Power By : **TEEN**

Model	Watt	Dimension (mm)	DLP
BLL-129	12W	300	ON ORDER

LED Colour : 3000K



BLL RD

Power By : **TEEN**

Model	Watt	Dimension (mm)	DLP
BLL-RD-137	14W	300	ON ORDER
BLL-RD-138	14W	600	ON ORDER

LED Colour : 3000K



BLL SQ

Power By : **TEEN**

Model	Watt	Dimension (mm)	DLP
BLL-SQ-139	14W	300	ON ORDER
BLL-SQ-140	14W	600	ON ORDER

LED Colour : 3000K



BLL

Power By : **TEEN**

Model	Watt	Dimension (mm)	DLP
BLL-127	12W	300	ON ORDER
BLL-128	12W	600	ON ORDER

LED Colour : 3000K



BLL

Power By : **TEEN**

Model	Watt	Dimension (mm)	DLP
BLL-131	12W	300	ON ORDER
BLL-132	12W	600	ON ORDER

LED Colour : 3000K



BLL

Power By : **TEEN**

Model	Watt	Dimension (mm)	DLP
BLL-133	12W	300	ON ORDER

LED Colour : 3000K



BLL

Power By : **TEEN**

Model	Watt	Dimension (mm)	DLP
BLL-135	24W	300	ON ORDER

LED Colour : 3000K



BLL

Power By : **TEEN**

Model	Watt	Dimension (mm)	DLP
BLL-133	12W	300	2400
BLL-133	12W	600	3000
BLL-133	12W	900	ON ORDER

LED Colour : 3000K

ON ORDER



BLL

Power By : **TEEN**

Model	Watt	Dimension (mm)	DLP
BLL-134	12W	300	2400
BLL-134	12W	600	3000
BLL-134	12W	900	ON ORDER

LED Colour : 3000K

Note: The prices of the all the bollards and poles are variable and may increase from time to time. Please contact our sales person before placing your order.

NEON FLEX

— **SHAPE YOUR SPACE** —

— **WITH LIGHT** —

Modern LED Strip Lighting for
Stunning Interiors



SLEEK & MODERN

Clean lines, contemporary elegance



CUSTOM DESIGNS

Curves, shapes & contours tailored to your space



ENERGY EFFICIENT

Low power, high impact
88 illumination



DURABLE & SAFE

Long-lasting LED technology
built for all environments

SILICON FLEX PRICE LIST

Sr. No.	Picture	Silicon Size	Use LED Strip Size	50 metre Box packing	Loose	Clamp	End Cap	End Cap with Hole
1		5 x 13 Top View	8 / 10 mm	230	300	10.00	10.00	10.00
2		8 x 8 Top View	5 mm	230	300	10.00	10.00	10.00
3		10 x 10 Top View	5 mm	230	300	10.00	10.00	10.00
4		12 x 12 Top View	8 mm	250	340	10.00	10.00	10.00
5		16 x 16 Top View	10 mm	450	590	10.00	10.00	10.00
6		20 x 14 Top View	10 mm	480	670	15.00	15.00	15.00
7		30 x 20 Top View	15 mm	890	1250	25.00	25.00	25.00
8		50 x 25 Top View	20 mm	1460	2030	35.00	35.00	35.00
9		25 x 17 Top View	10 mm	650	900	25.00	25.00	25.00
10		D-16 270 Degree	8 mm	490	700	25.00	25.00	25.00
11		D-22 360 Degree	5/10 mm	980	1250	25.00	25.00	25.00





SILICON FLEX PRICE LIST

Sr. No.	Picture	Silicon Size	Use LED Strip Size	50 metre Box packing	Loose	Clamp	End Cap	End Cap with Hole
12		D-22 WALL BRACKET SET		4900				
13		D-22 HANGING WIRE		970				
14		D-22 JOINTER		1780				
16		V-22 Corner	8 mm	485	670	15.00	15.00	15.00
17		15 x 13 - 180 Degree	10 mm	485	670	15.00	15.00	15.00
18		4 x 10 Side View	5 mm	210	300	10.00	10.00	10.00
19		6 x 12 Side View	5 mm	240	310	10.00	10.00	10.00
20		10 X 10 Side View	5 mm	260	350	10.00	10.00	10.00
21		12 X 12 Side View	8 mm	290	375	10.00	10.00	10.00
22		16 x 16 Side View	10 mm	450	590	10.00	10.00	10.00
23		12 x 20 Side View	8 mm	485	670	15.00	15.00	15.00

Note: a) @18% GST Extra b) NO Warranty on above Products c) Goods Once Sold will not be Taken Back

PRODUCT CODE	PRODUCT	SIZE	MODEL NAME	QTY	DLP
TPF-007			7MM	2 MTRS	ON ORDER BLACK: ON ORDER
TPF-010			10MM CON	2 MTRS	ON ORDER
TPF-012			12MM CON	2 MTRS	ON ORDER
TPF-017			17MM CON	2 MTRS	ON ORDER BLACK: ON ORDER
TPF-007-SF			7MM SF	2 MTRS	ON ORDER BLACK: ON ORDER
TPF-010-SF			10MM SF	2 MTRS	ON ORDER
TPF-012-SF			12MM SF	2 MTRS	ON ORDER
TPF-017-SF			17MM SF	2 MTRS	ON ORDER BLACK: ON ORDER
TPF-025-CONL			25MM CON	2 MTRS	ON ORDER
TPF-035-CONL			35MM CON	2 MTRS	ON ORDER
TPF-LDP-035-CONL			LOW DEEP PROFILE 35MM CON	2 MTRS	ON ORDER
TPF-050-CONL			50MM CON	2 MTRS	ON ORDER
TPF-LDP-035-CONL			LOW DEEP PROFILE 35MM SF	2 MTRS	ON ORDER
TPF-035-SF			35MM SF	2 MTRS	ON ORDER
TPF-025-SF			25MM SF	2 MTRS	ON ORDER
TPF-050-SF			50MM SF	2 MTRS	ON ORDER
TPF-LDP-050-SF			LOW DEEP PROFILE 50MM SF	2 MTRS	ON ORDER
TPF-075-SF			75MM SF	2 MTRS	ON ORDER

PRODUCT CODE	PRODUCT	SIZE	MODEL NAME	QTY	DLP
TPF-CORNER			CORNER	2 MTRS	ON ORDER
TPF-LDP-050-CONL			LOW DEEP PROFILE 50MM CON	2 MTRS	ON ORDER
TPF-BENDABLE			Bendable	2 MTRS	ON ORDER
TPF-055-SF			55MM SF	2 MTRS	ON ORDER
TPF-075-CONL			75MM CON	2 MTRS	ON ORDER
TPF-017-DP			DEEP PROFILE 17 MM SF	2 MTRS	ON ORDER
TPF-017-DPC			DEEP PROFILE 17 MM CON	2 MTRS	ON ORDER



SIZES: 300|600|900|1200 MM **BODY COLOR:** WHITE & BLACK (AVAILABLE ON ORDER, 100% ADVANCE PAYMENT)

TERMS

1. Hanging/Suspension kit will be charged extra for profiles.
2. Request to all customers to give length sizes of profiles in millimeters for accuracy.
3. Any customized design will be chargeable for fabrication work @ 10% of net value of profiles, power supply cost excluded.
4. Profile's order once placed will not be changed or cancelled.
5. 100% Advance payment at the time of P.O. & remaining before delivery.
6. Any profiles with PCB the size should be given in multiples of 50mm & for wire out let 10mm extra for each profiles.
7. Minimum Order Quantity is 100 Meters for Empty Housing Profiles.

A Class of it's own...



LED Lighting

**FACADE &
LANDSCAPE
LIGHTING
SYSTEMS**

**INDUSTRIAL
LIGHTING**

RGB
LIGHTING
SOLUTIONS

DMX
CONTROLLED
LIGHTING
SYSTEMS

**CUSTOMIZED
PROJECT BASED
LIGHTING SOLUTIONS**



VIBRANT
COLORS



SMART
CONTROL



TAILORED
SOLUTIONS



RELIABLE
PERFORMANCE



ENERGY
EFFICIENT

Each product is developed using quality components and modern manufacturing practice to ensure long life, consistent illumination and dependable performance.

***100% Advance payment
and no return material**

***Packing charge
Rs.300/- extra**

TREE HUG MODULAR LIGHTS

Transform Your Garden into a
Magical Landscape

"Lighting that doesn't
just shine...
it transforms."



MODULAR RING DESIGN
Flexible fit for any tree size



**ENERGY EFFICIENT
LED TECHNOLOGY**
Bright, long life & low
power consumption



360° UNIFORM LIGHTING EFFECT
Perfect glow from every angle



**OUTDOOR
WEATHER RESISTANT**
Built for all weather
conditions



MULTIPLE COLOR OPTIONS
Warm / RGB / Cool White



EASY INSTALLATION
Comes with strong
ground spikes



MULTIPLE COLOR OPTIONS



Warm White



Cool White



Green



Pink



Purple



Blue



Amber




Red



Golden White

CUSTOMIZABLE PRICING

Model Code	Colour Options	Power Range	Voltage	IP Rating	Application
TL-WL-12-24-404	WW / RGB / RGBW	12-24 W	230V AC / 24V DC	IP65	Tree Trunk Lighting
TL-WL-36-48-404	WW / RGB / RGBW	36-48 W	230V AC / 24V DC	IP65	Tree Trunk Lighting
TL-WL-60-72-404	WW / RGB / RGBW	60-72 W	230V AC / 24V DC	IP65	Tree Trunk Lighting
TL-WL-84-96-404	WW / RGB / RGBW	84-96 W	230V AC / 24V DC	IP65	Tree Trunk Lighting
TL-WL-108-120-404	WW / RGB / RGBW	108-120 W	230V AC / 24V DC	IP65	Tree Trunk Lighting

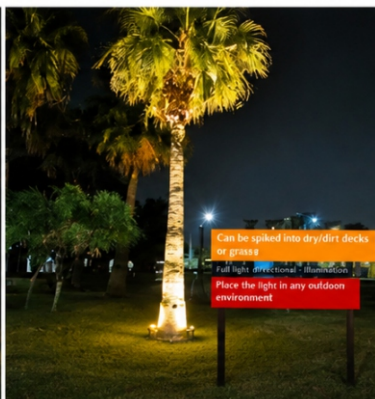

A Class of it's own...



LED Lighting

PIXEL BAR LIGHT

LINEAR PROFILE / MEDIA FACADE LIGHTS

TL406



HIGH
EFFICIENCY
LED



OUTDOOR
RATED




DMX512
COMPATIBLE



PIXEL
ADDRESSABLE



ALUMINIUM
PROFILE

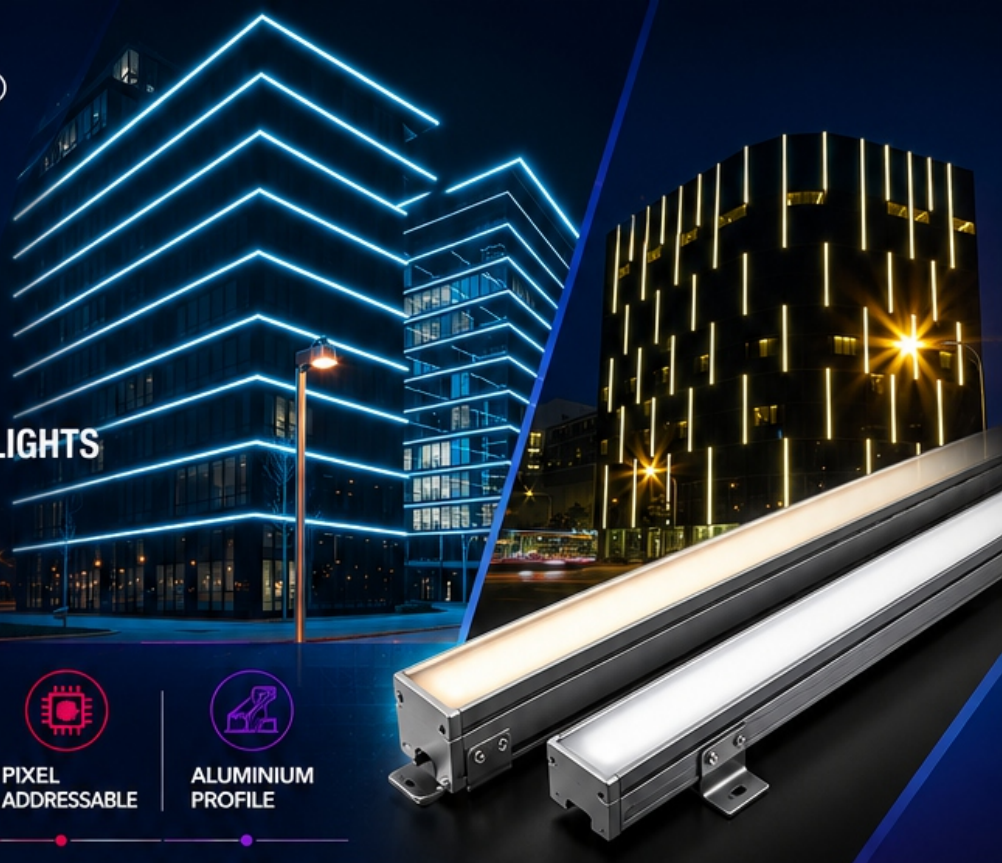

FEATURES & BENEFITS

	Category:	Pixel Bar / Media Facade Light
	Light Source:	High Efficiency LED (Mono / RGB / RGBW / RGBWW)
	Housing:	Aluminium Profile
	Diffuser:	Polycarbonate / Toughened Lens
	Control:	RGB, RGBW for dynamic lighting and media façade
	Voltage:	24V DC
	IP Rating:	IP65
	Mounting:	Surface Mounted (Overground)
	Application:	Outdoor
	Body Colour:	Black / Dark Grey / Silver Grey

PRODUCT DESCRIPTION

TL406 is a high-performance linear pixel bar designed for dynamic media façade and architectural lighting applications. Built with an aluminium profile housing and precision optical system, it delivers uniform linear output for static or programmable lighting effects.

Available in Mono, RGB, RGBW and RGBWW configurations with DMX512 control for dynamic colour rendering in façade and media installations.



ARCHITECTURAL
ACCENT LIGHTING



MEDIA FAÇADE
SOLUTIONS



DURABLE &
RELIABLE




VIBRANT COLOURS
& EFFECTS

TECHNICAL DATA

MODEL CODE	COLOUR OPTIONS	POWER	VOLTAGE	CONTROL	IP RATING	APPLICATION
TL406-MONO	Mono LED	12-15 W	24V DC	ON / OFF / DMX / RDM	IP65 / IP67	Media Façade
TL406-RGB	RGB LED	12-15 W	24V DC	ON / OFF / DMX / RDM	IP65 / IP67	Media Façade
TL406-RGBW / RGBWW	RGBW / RGBWW LED	12-15 W	24V DC	ON / OFF / DMX / RDM	IP65 / IP67	Media Façade

BUILT FOR PERFORMANCE

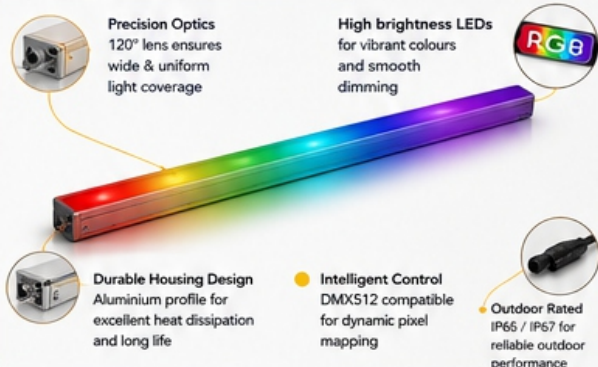

KEY FEATURES

	STATIC	Ideal for static architectural accent lighting.
	DIMMABLE	Smooth dimming for custom ambience.
	DYNAMIC (DMX)	DMX512 control for dynamic colour and effects.
	PIXEL ADDRESSABLE	Individual pixel control for stunning media façades.

BODY COLOUR OPTIONS

BLACK



SILVER
GREY



DARK
GREY





WALL WASHER SF-24V

Power By : OSRAM LED

Model	Watt	Dimensions	Body Colour	LED Colour	IP Rating	Voltage	DLP
WL-WS-SF-9	9W	L-300mm x W-35mm H-25mm wire-1ft	BB-GRAY	NW-WW-WH	65	24VDC	5000
WL-WS-SF-18	18W	L-600mm x W-35mm H-25mm wire-1ft	BB-GRAY	NW-WW-WH	65	24VDC	8250
WL-WS-SF-27	27W	L-900mm x W-35mm H-25mm wire-1ft	BB-GRAY	NW-WW-WH	65	24VDC	8950
WL-WS-SF-30	30W	L-1000mm x W-35mm H-25mm wire-1ft	BB-GRAY	NW-WW-WH	65	24VDC	9700
WL-WS-SF-36	36W	L-1200mm x W-35mm H-25mm wire-1ft	BB-GRAY	NW-WW-WH	65	24VDC	10800



WALL WASHER SF-220V

Power By : OSRAM LED


Model	Watt	Dimensions	Body Colour	LED Colour	IP Rating	Voltage	DLP
WL-WS-SF-6	6W	L-168mm x W-43mm H-48mm wire-1ft	BB-GRAY	NW-WW-WH	65	220VDC	4950
WL-WS-SF-11	11W	L-300mm x W-43mm H-48mm wire-1ft	BB-GRAY	NW-WW-WH	65	220VDC	8000
WL-WS-SF-22	22W	L-600mm x W-43mm H-48mm wire-1ft	BB-GRAY	NW-WW-WH	65	220VDC	8550
WL-WS-SF-33	33W	L-900mm x W-43mm H-45mm wire-1ft	BB-GRAY	NW-WW-WH	65	220VDC	9200
WL-WS-SF-45	45W	L-1200mm x W-43mm H-45mm wire-1ft	BB-GRAY	NW-WW-WH	65	220VDC	10000



LINEAR INGROUND

Power By : OSRAM LED

Model	Watt	Dimensions	Body Colour	LED Colour	IP Rating	Voltage	DLP
LIN-6	6W	L-210mm x W-37mm H-35mm wire-1ft	BB-GRAY	NW-WW-WH	65	220VDC	5600
LIN-9	9W	L-330mm x W-60mm H-35mm wire-1ft	BB-GRAY	NW-WW-WH	65	220VDC	8400
LIN-18	18W	L-630mm x W-60mm H-35mm wire-1ft	BB-GRAY	NW-WW-WH	65	220VDC	9200
LIN-27	27W	L-930mm x W-60mm H-35mm wire-1ft	BB-GRAY	NW-WW-WH	65	220VDC	11500
LIN-36	36W	L-1230mm x W-60mm H-35mm wire-1ft	BB-GRAY	NW-WW-WH	65	220VDC	13000

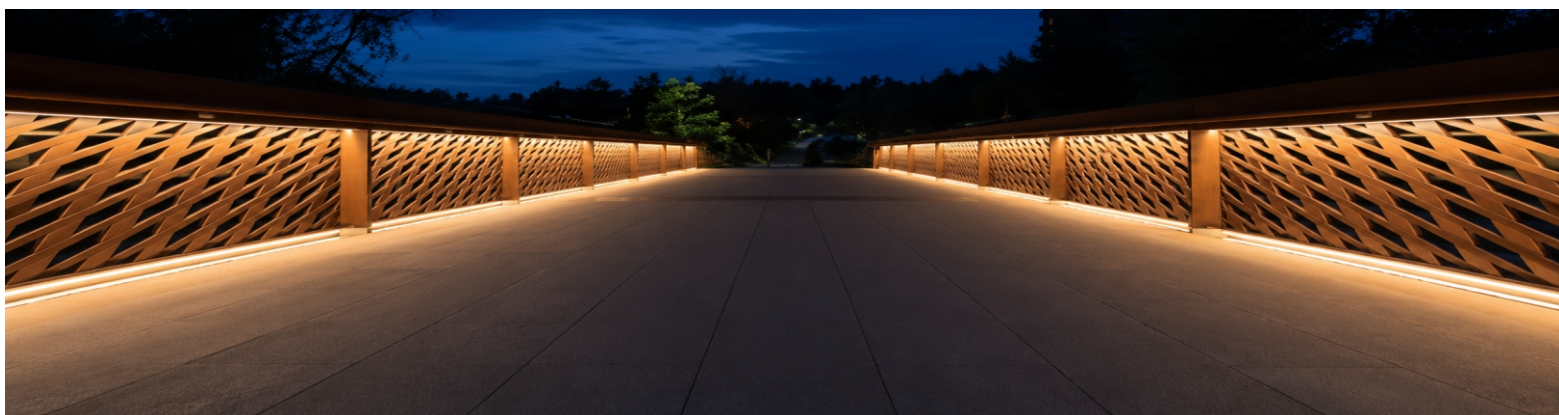

ROUND FACADE LIGHTS



Model : TK-RD-FSD-6
Power : 6W
Colour temp : 3000/4000/6000/
CRI : >80Ra
Voltage : 220VAC
Surge Protection : 2.5KVA
Beam Degree : 10
Material Aluminum : Die-cast
Dimension : 095MM
Wire : 1ft
IP Grade : IP65
DLP : 5200



Model : TK-RD-FSD-12
Power : 12W
Colour temp : 3000/4000/6000/
CRI : >80Ra
Voltage : 220VAC
Surge Protection : 2.5KVA
Beam Degree : 10
Material Aluminum : Die-cast
Dimension : 130X160MM
Wire : 1ft
IP Grade : IP65
DLP : 8300



Model : TK-RD-FSD-18
Power : 18W
Colour temp : 3000/4000/6000/
CRI : >80Ra
Voltage : 220VAC
Surge Protection : 2.5KVA
Beam Degree : 10
Material Aluminum : Die-cast
Dimension : 150X160 MM
Wire : 1ft
IP Grade : IP65
DLP : 9200



Model : TK-RD-FSD-24
Power : 24W
Colour temp : 3000/4000/6000/
CRI : >80Ra
Voltage : 220VAC
Surge Protection : 2.5KVA
Beam Degree : 10
Material Aluminum : Die-cast
Dimension : 180X210 MM
Wire : 1ft
IP Grade : IP65
DLP : 10000



Model : TK-RD-FSD-36
Power : 36W
Colour temp : 3000/4000/6000/
CRI : >80Ra
Voltage : 220VAC
Surge Protection : 2.5KVA
Beam Degree : 10
Material Aluminum : Die-cast
Dimension : 230X270MM
Wire : 1ft
IP Grade : IP65
DLP : 12000



Model : TK-RD-FSD-48
Power : 48W
Colour temp : 3000/4000/6000/
CRI : >80Ra
Voltage : 220VAC
Surge Protection : 2.5KVA
Beam Degree : 10
Material Aluminum : Die-cast
Dimension : 330X330MM
Wire : 1ft
IP Grade : IP65
DLP : 15000

SQUARE FACADE LIGHTS



IP 65

Lense – 3*,10*,24*,45*
 Input option – 240vAC, 24VDC

145 x 145 x 180 H

36w - 10d - green led
DLP - 11600



IP 65

Lense – 3*,10*,24*,45*
 Input option – 240vAC, 24VDC

200 x 200 x 210 H

48w - 10d - green led
DLP - 16900



LED BEAM LIGHT

Voltage:AC220V
 Power:36W
 IP rate:IP65
 Chip:3535
 Size:150x130x155 D
 Degree - 5*
 Color:3000K,4k,6k,R,G,B,27k
 Material: Die cast aluminum

36w - 5degree - green colour led
DLP - 10200

Complete Solution for SMART LED LIGHTING

LIGHT YOUR MOMENT

A Class of it's own...




LED Lighting

IP65 WATERPROOF IN-GROUND LED LIGHTS



IGL 01
(1x3W)



IGL 02
(3&3x3W)




IGL 03
(6&6x3W)



IGL 04
(9&9x3W)



IGL 05
(12&12x3W)



IGL 06
(10-12W)



IGL 07
(8-10W)



IGL 08
(8-10W)



IGL 09
(3&3x3W)



IGL 10
(6&6x3W)



IGL 11
(9&9x3W)



IGL 12
(12&12x3W)



IGL 13
(3W)



IGL 14
(6W)



IGL 15
(12W)



**IP65
WATERPROOF**
Dustproof &
Water Jet Proof



**ENERGY
EFFICIENT LED**
Low Power
High Performance



**DURABLE
CONSTRUCTION**
Die-Cast Aluminium
/ Stainless Steel
Housing



**MULTIPLE
WATT OPTIONS**
3W / 6W / 9W / 12W



BEAM ANGLES
8° / 15° / 24° /
36° / 45°



LONG LIFE
50,000+
HOURS

IDEAL FOR



Pathways



Tree Uplighting



Wall Washers




Building
Facades



Driveways



Landscape
& Gardens

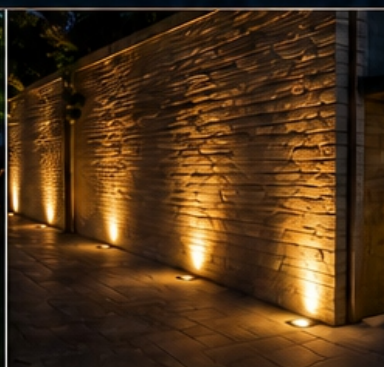

**IP65
WATERPROOF**

**BUILT TO PERFORM.
DESIGNED TO IMPRESS.**



www.teknolite.in



9222229290

A Class of it's own...



LED Lighting



A Class of it's own...



LED Lighting

Teknovision Lighting Pvt. Ltd.

16, Waman Patil Industrial Estate, Chembur, Mumbai - 71 (INDIA)
Phone : +91-22-42188888 / +91 9321229290

www.teknolite.in

